

DMX CHARTS


RDM Model ID: 0xD092
RDM Personality ID List

ID	DMX Mode	Footprint
1	1 Ch	1
2	2 Ch	2
3	3 Ch	3
4	4 Ch	4
5	9 Ch	9
6	15 Ch	15

CH	1CH	2CH	3CH	4CH	9CH
1	DIMMER	DIMMER	WARM WHITE	DIMMER	DIMMER
2		CCT	COLD WHITE	DIMMER FINE	DIMMER FINE
3			DIMMER FADE	CCT	STROBE
4				DIMMER FADE	CCT
5					CROSSFADE
6					WARM WHITE
7					COLD WHITE
8					DIMMER FADE
9					CONTROL

1CH	2CH	3CH	4CH	9CH	FUNCTION	DMX Value	Default
1	1		1	1	DIMMER 0~100%	000 ÷ 255	000
			2	2	DIMMER FINE 0~100%	000 ÷ 255	000
				3	STROBE Close Strobe from slow to fast Open Pulse in from slow to fast Open Pulse out from slow to fast Open Random from slow to fast Open	000 ÷ 001 002 ÷ 062 063 ÷ 064 065 ÷ 125 126 ÷ 127 128 ÷ 188 189 ÷ 190 191 ÷ 251 252 ÷ 255	255
	2		3	4	CCT Linear from 2700K to 6500K	000 ÷ 255	000
				5	CROSSFADE FROM CCT TO WWCW 0~100%	000 ÷ 255	000
		1		6	WARM WHITE 0~100%	000 ÷ 255	000
		2		7	COLD WHITE 0~100%	000 ÷ 255	000
		3	4	8	DIMMER FADE Preset dimmer speed from display menu Dimmer speed mode off Dimmer speed mode 1 (fast speed) Dimmer speed mode 2 (middle speed) Dimmer speed mode 3 (slow speed)	000 ÷ 051 052 ÷ 101 102 ÷ 152 153 ÷ 203 204 ÷ 255	000
				9	CONTROL NO FUNCTION DIMMER CURVE LINEAR DIMMER CURVE S-CURVE DIMMER CURVE SQUARE LAW DIMMER CURVE INVERSE SQUARE LAW DIMMER SPEED AUTO DIMMER SPEED FAST DIMMER SPEED MEDIUM DIMMER SPEED SLOW LED FREQUENCY 600HZ LED FREQUENCY 1200HZ LED FREQUENCY 2000HZ LED FREQUENCY 4000HZ LED FREQUENCY 6000HZ LED FREQUENCY 25KHZ DMX FAULT HOLD DMX FAULT BLACKOUT DMX FAULT STAND ALONE STAND ALONE MASTER DMX STAND ALONE MASTER NO DMX STAND ALONE SLAVE STAND ALONE EFFECTS STAND ALONE STATIC COLORS STAND ALONE WHITE PRESETS STAND ALONE MANUAL COLORS INVERT MAPPING ON INVERT MAPPING OFF Reserved FACTORY DEFAULT OF CONTROL FUNCTIONS	0 ÷ 1 2 ÷ 3 4 ÷ 5 6 ÷ 7 8 ÷ 9 10 ÷ 11 12 ÷ 13 14 ÷ 15 16 ÷ 17 18 ÷ 19 20 ÷ 21 22 ÷ 23 24 ÷ 25 26 ÷ 27 28 ÷ 29 30 ÷ 31 32 ÷ 33 34 ÷ 35 36 ÷ 37 38 ÷ 39 40 ÷ 41 42 ÷ 43 44 ÷ 45 46 ÷ 47 48 ÷ 49 50 ÷ 51 52 ÷ 53 54 ÷ 253 254 ÷ 255	000

ROW SECTIONS

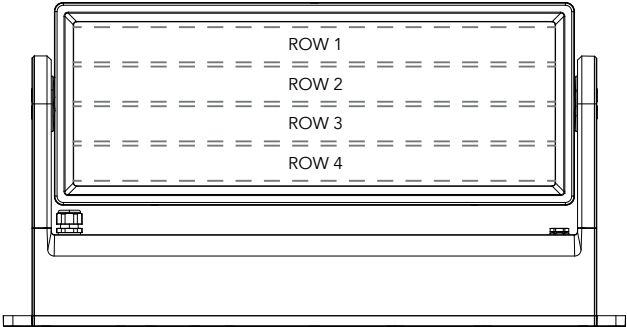

CH	15 CH
1	DIMMER
2	STROBE 1
3	STROBE 2
4	STROBE 3
5	STROBE 4
6	WW1
7	CW1
8	WW2
9	CW2
10	WW3
11	CW3
12	WW4
13	CW4
14	DIMMER FADE
15	CONTROL

15 CH	FUNCTION	DMX Value	Default
1	DIMMER 0~100%	000 ÷ 255	000
2	STROBE 1 Close Strobe from slow to fast Open Pulse in from slow to fast Open Pulse out from slow to fast Open Randon from slow to fast Open	000 ÷ 001 002 ÷ 062 063 ÷ 064 065 ÷ 125 126 ÷ 127 128 ÷ 188 189 ÷ 190 191 ÷ 251 252 ÷ 255	255

15 CH	FUNCTION	DMX Value	Default
3	STROBE 2 Refer to "STROBE 1" for values	---	255
4	STROBE 3 Refer to "STROBE 1" for values	---	255
5	STROBE 4 Refer to "STROBE 1" for values	---	255
6	WARM WHITE 1 0~100%	000 ÷ 255	000
7	COLD WHITE 1 0~100%	000 ÷ 255	000
8	WARM WHITE 2 0~100%	000 ÷ 255	000
9	COLD WHITE 2 0~100%	000 ÷ 255	000
10	WARM WHITE 3 0~100%	000 ÷ 255	000
11	COLD WHITE 3 0~100%	000 ÷ 255	000
12	WARM WHITE 4 0~100%	000 ÷ 255	000
13	COLD WHITE 4 0~100%	000 ÷ 255	000
14	DIMMER FADE Preset dimmer speed from display menu Dimmer speed mode off Dimmer speed mode 1 (fast speed) Dimmer speed mode 2 (middle speed) Dimmer speed mode 3 (slow speed)	000 ÷ 051 052 ÷ 101 102 ÷ 152 153 ÷ 203 204 ÷ 255	000
15	CONTROL NO FUNCTION DIMMER CURVE LINEAR DIMMER CURVE S-CURVE DIMMER CURVE SQUARE LAW DIMMER CURVE INVERSE SQUARE LAW DIMMER SPEED AUTO DIMMER SPEED FAST DIMMER SPEED MEDIUM DIMMER SPEED SLOW LED FREQUENCY 600HZ LED FREQUENCY 1200HZ LED FREQUENCY 2000HZ LED FREQUENCY 4000HZ LED FREQUENCY 6000HZ LED FREQUENCY 25KHZ DMX FAULT HOLD DMX FAULT BLACKOUT DMX FAULT STAND ALONE STAND ALONE MASTER DMX STAND ALONE MASTER NO DMX STAND ALONE SLAVE STAND ALONE EFFECTS STAND ALONE STATIC COLORS STAND ALONE WHITE PRESETS STAND ALONE MANUAL COLORS INVERT MAPPING ON INVERT MAPPING OFF Reserved FACTORY DEFAULT OF CONTROL FUNCTIONS	0 ÷ 1 2 ÷ 3 4 ÷ 5 6 ÷ 7 8 ÷ 9 10 ÷ 11 12 ÷ 13 14 ÷ 15 16 ÷ 17 18 ÷ 19 20 ÷ 21 22 ÷ 23 24 ÷ 25 26 ÷ 27 28 ÷ 29 30 ÷ 31 32 ÷ 33 34 ÷ 35 36 ÷ 37 38 ÷ 39 40 ÷ 41 42 ÷ 43 44 ÷ 45 46 ÷ 47 48 ÷ 49 50 ÷ 51 52 ÷ 53 54 ÷ 253 254 ÷ 255	000