



Mosaico is a powerful exterior LED image projector for projection of textures, images and logos onto buildings and landscapes. The outstanding 11'667 lumens output allows for replacement of the 1.200 HID fixture with this far more durable and advanced tool. The complete set of on board effects allow for extreme creative integration in any context and the zoomable optics makes it a truly versatile fixture for both near-field and long-throw installations.

MAIN FEATURES

- IP66 allowing long-lasting installation with minimal maintenance
- Beam angle zooming from 12.9° to 46.5° allows for flexible use and opens up a new level of effects
- Extremely bright with over 11'667 lumens, crisp focus and with 5 layers of effects allowing for limitless combinations

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 250 W high-power white LED
- CCT: 8.500
- Luminous flux: (12.9°) 10'740 lm - (46.5°) 11'667 @full
- Lux: (12.9°) 10'512 lx - (46.5°) 1'409 lx @5 m full
- Source life expectancy: > 30.000 hrs (L70B10 @Ta 25° C / 77° F)

OPTICS

- Zoom: 12.9° - 46.5° motorised linear zoom
- Lens diameter: 109 mm
- Lens type: high-quality glass lens optics
- Focus: motorised

COLOUR SYSTEM

- Colour wheel: 14 colour filters on two colour wheels

DYNAMIC EFFECTS

- Animation wheel: animation wheel with CW and CCW rotation
- Rotating gobos: 7 rotating gobos + open, interchangeable, indexing
- Gobo size (BW): outer: 26,9 mm - image: 23 mm
- Gobo size (Color): outer: 26,9 mm - image: 20,5 mm
- Circular prism: 3 f with bi-directional rotation, indexing
- Frost: linear 0 - 100% frost filter
- Iris: 5 - 100 % motorised iris
- Special features: interchangeable animation wheel through magnets and record scenes and create chases and shows throughout these scenes

BODY

- Body: aluminium die-casting
- Body colour: RAL 9006
- Other: Inspectable cover window for gobos replacement and maintenance

CONTROL

- Protocols: DMX512, RDM, W-DMX, Stand Alone programmer and playback
- DMX channels: 12 / 14 / 16 / 19 channel

ACCESSORIES & RELATED PRODUCTS

- C6002B Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black
- FSHMOSAICO 1U Foam shell compatible with MOSAICO
- MOSUNIBRACK Bracket for MOSAICO for wall mounting and suspension on poles
- RSR1235B Steel security cable for hanging bodies, inox steel shackle, L=120 cm, black
- WSBBF1G5 BlackBox F-1 G5 transmitter, 2,45GHz & 5.2/5,8 GHz, DMX/RDM, 512Ch
- WSBBF1G6 BlackBox F-1 G6 transrec, 512ch, 2.45GHz, DMX&RDM, Bluetooth, G3, G4, G4S, G5, CRMX
- WSBBR512G5 BlackBox R-512 G5 receiver 512Ch, 2.45GHz & 5.8GHz, DMX/RDM optional
- WSBBR512G6 BlackBox R-512 G6 receiver 512Ch, 2.45GHz, DMX&RDM, Bluetooth, G3, G4, G4S, G5, CRMX
- ANW7473BL Animation wheel in borosilicate glass. Snow with greeting blue white. Ø E 105 mm

- Wireless Control: included, wireless solution receiver
- RDM: RDM for remote monitoring and settings
- Display: black OLED touch display
- Firmware upgrade: yes, via USB - DMX interface (UPBOXPRO/UPBOX1) not included

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1~30 Hz, electronic
- Operating temperature: -20° C / +45° C (-4° F / +113° F)

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 320 W
- Standby power: 56 W
- Output (at 230V): 6 units on a single power line
- Power factor: >0,95
- Inrush current: 230VAC/19.6A

PHYSICAL

- IP rating: 66 for outdoor installations
- IK rating: 09
- Cooling: active, with IP low noise fan
- Suspension and fixing: bracket for hanging and positioning
- Adaptors: XLR and BARE END 16A adaptors included
- Signal connection: 1,8 m moulded IP signal IN/OUT connectors
- Data connection: W-DMX transceiver
- Power connection: 1,8 m moulded IP power IN/OUT connectors
- Dimensions (WxHxD): 332x425x453 mm
- Weight: 19,3 kg

CERTIFICATIONS / APPROVALS

- Certifications / Approvals: CE, UKCA, RCM, cTUVus, FCC


- GBS8398BW Custom glass grid gobo for MOSAICO, used to map perfectly any building surface
- GBS8548FC Gobo in borosilicate glass. Santa Claus. øE26.9, øIMG20,5
- ANW7474BW Animation wheel in borosilicate glass. Snow with greeting black white. Ø E 105 mm
- ANW7475BL Animation wheel in borosilicate glass. Snowfall blue white. Ø E 105 mm
- GBS8550BW Gobo in borosilicate glass. Pines. øE26.9, øIMG23
- GBS9481FC Gobo in borosilicate glass. Christmas Nativity Madonna with Child. E26.9, IMG20,5
- GBS8549FC Gobo in borosilicate glass. Merry Christmas. øE26.9, øIMG23
- GBS9490FC Gobo in borosilicate glass. Christmas. øE26.9, Ø IMG 20,5
- ANW7476BW Animation wheel in borosilicate glass. Snowfall black white. Ø E 105 mm

ACCESSORIES & RELATED PRODUCTS


- | | | | |
|-------------|--|-----------------------|--|
| ▪ GBS9489FC | Gobo in borosilicate glass.Sacred Family Nativity Jesus Child. E 26,9, IMG20,5 | ▪ GBS94862C | Gobo in borosilicate glass.Christmas Seasons Greetings. Ø E 26,9mm, Ø IMG 20,5mm |
| ▪ GBS8547BW | Gobo in borosilicate glass.Christmas tree.ØE26,9, ØIMG23 | ▪ FCLMOSAICO | Flightcase for 2x MOSAICO, foam shells included |
| ▪ GBS9488FC | Gobo in borosilicate glass.Christmas gift packs.Ø E 26,9 mm, Ø IMG 20,5 mm | ▪ AWEXAC1 | Extension IP67 power cable, IPpowercon-F -> IPpowercon-M. compatible |
| ▪ GBS8545FC | Gobo in borosilicate glass. Christmas. Ø E 26,9 mm, Ø IMG 20,5 mm | ▪ AWEXAC1L03/05/10/20 | IP67 power extension cable for outdoor architectural projectors, L.03/05/10/20 m |
| ▪ GBS8544BW | Gobo in borosilicate glass.Christmas snowflakes. Ø E 26,9, Ø IMG 23 | ▪ AWEXDC1L03/05/10/20 | IP67 DMX extension cable for outdoor architectural projectors, L.03/05/10/20 m |
| | | ▪ UPBOX1U | Firmware uploader kit, USB IN, 3pin XLR DMX OUT, USB OUT |

PRESET FULL ON

Beam angle 50%: 12,9°

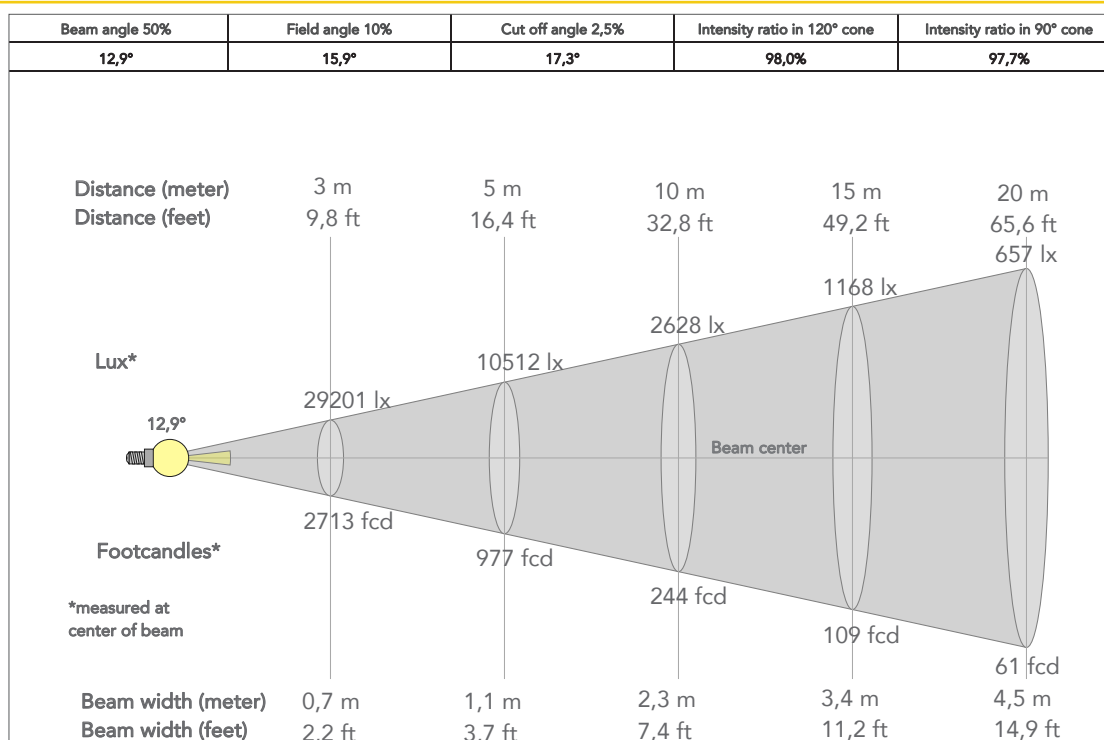

TECHICAL DRAWINGS

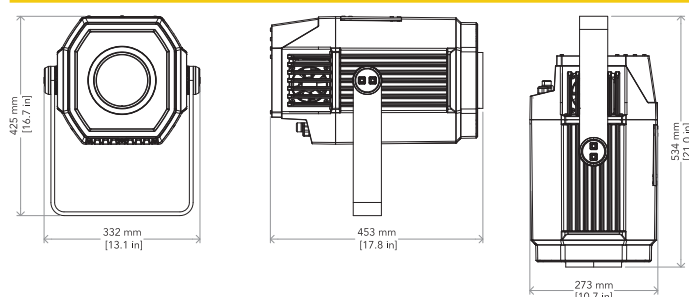

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
 Certified to CSA STD: C22.2 NO. 166

Visit our website
 for specifications and
 tech documentations

