

ArcPar 7

7x8W RGBW/FC outdoor IP66 wash light

ORDER CODE: **ARCPAR7**



ArcPar 7 is a compact exterior wash light with 7x8W RGBW/FC LED's source engineered for outdoor installations where a small but bright accent luminaire with a superior chromatic precision is required. The round shape design and the super-slim profile allows the **ArcPar 7** to be easily integrated into any architectural design whether it be indoor or outdoor (IP66) due to the construction of chassis in die-cast aluminium and tempered glass.

MAIN FEATURES

- 7x8W RGBW/FC LEDs
- Slim profile and fanless
- IP66 for outdoor installations

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 7x8W RGBW / FC LEDs
- Luminous flux: 1'933 lm @full
- Lux: (15°) 882 lx @5 m full
- Lux: (45°) 117 lx @5 m full
- Source life expectancy: 50.000 hrs (L70 @25° C / 77° F)

OPTICS

- Beam angle: 15°
- Field angle: 27°
- Additional optics: 25° - 45° (optional)

COLOUR SYSTEM

- Colour mixing: RGBW / FC
- White presets: 3.200 K ~ 10.000 K
- Colour wheel: virtual colour wheel with macros
- Macros: several pre-build macros with adjustable speed

DYNAMIC EFFECTS

- Static colour mode: selection of static colour
- Manual colour mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment

BODY

- Body: sturdy die-cast aluminium body
- Body colour: RAL 9003

CONTROL

- Protocols: DMX512
- DMX channels: 4 / 6 / 10 channel
- Display: touch - sensitive LED display
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Operating temperature: -20° C / +45° C (-4° F / +113° F)
- LED Control: flicker free operation

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 55W
- Output (at 230V): 30 units on a single power line
- Power factor: 0,98

PHYSICAL

- Cooling: pressure and temperature balance through GORE membrane vents
- Suspension and fixing: bracket for hanging and positioning
- Adaptors: XLR and Schuko 16A adaptors included
- Signal connection: moulded IP signal IN/OUT connectors
- Power connection: moulded IP signal IN/OUT connectors
- IP rating: 66 for outdoor installations
- Dimensions (WxHxD): 240x263x133 mm
- Weight: 4,9 kg


ACCESSORIES & RELATED PRODUCTS

- | | |
|-----------------|--|
| ▪ ARCLUMIL15D42 | Optic lens 15°, D.42mm (included) |
| ▪ ARCLUMIL25D42 | Optic lens 25°, D.42mm |
| ▪ ARCLUMIL45D42 | Optic lens 45°, D.42mm |
| ▪ AWEXAC1 | Extension IP67 power cable, IPpowercon-F -> IPpowercon-M. compatible |

- | | |
|-----------|--|
| ▪ AWEXDC1 | IP67 DMX extension cable for ARCHWORK projectors |
| ▪ UPBOX1U | Firmware uploader kit, USB IN, 3pin XLR DMX OUT, USB OUT |


PRESET FULL ON

Beam angle 50%: 15°

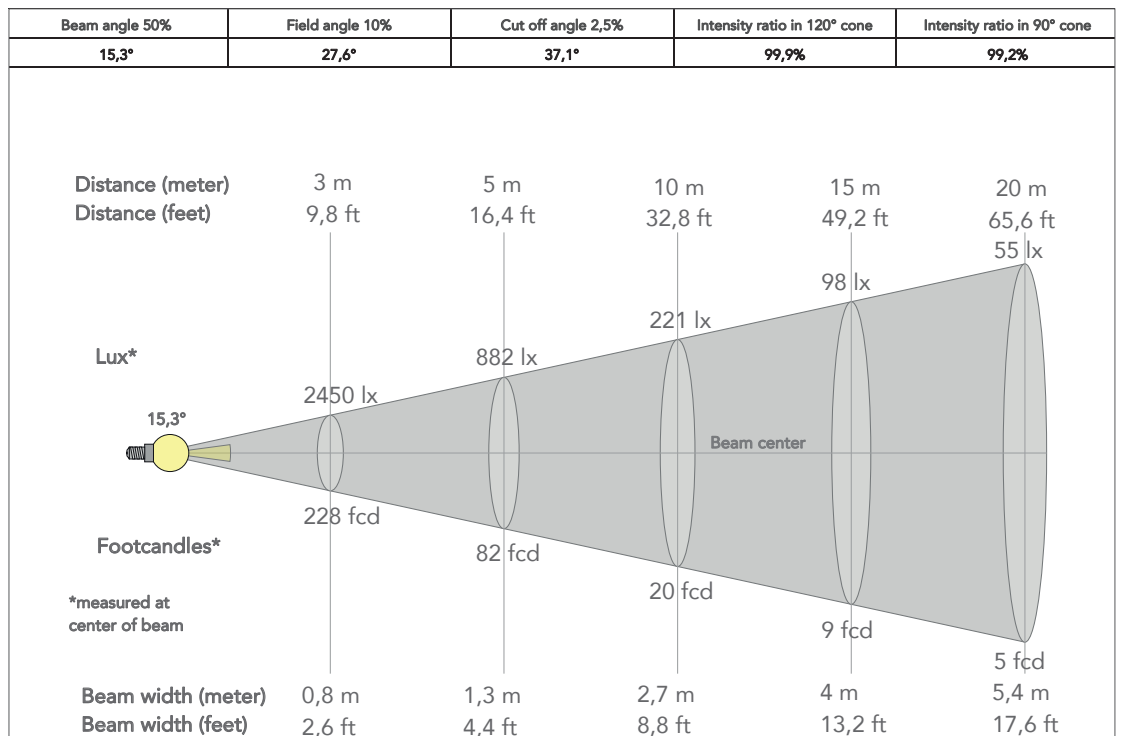


PRESET FULL ON

Beam angle 50%: 45°

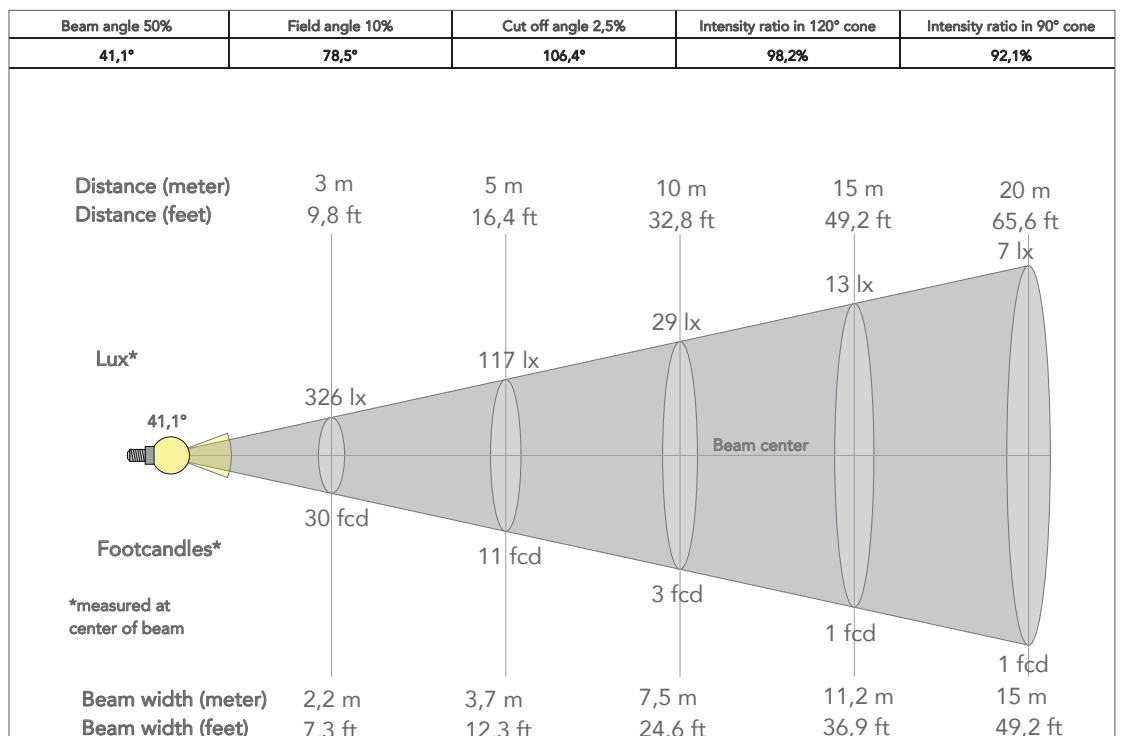

TECHICAL DRAWINGS

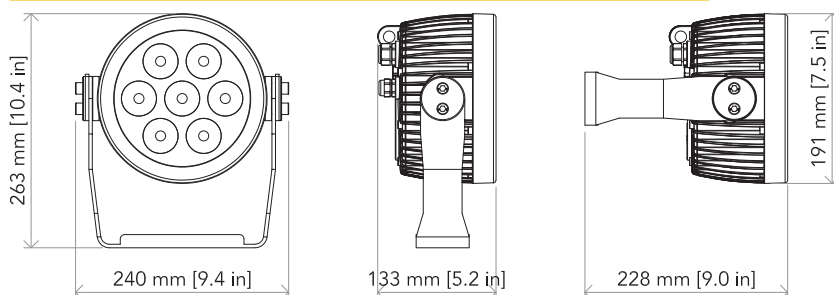

For more product
info and downloads
visit our website



ARCHWORK is a trademark of
MUSIC & LIGHTS S.r.l.
musiclights.it

Via A. Olivetti snc
04026 - Minturno (LT) ITALY
Tel: +39 0771 72190

musiclights.it
info@musiclights.it