

# LiveX 08A

Bi-amp loudspeaker, AB-cl. 150W 2-way (8" LF+1" HF), ABS box, 117dB SPL

ORDER CODE: **LIVEX08A**

**DAD**<sup>®</sup>  
DYNAMIC AUDIO DEVICE



Active loudspeakers, AB class bi-amp, 2-way 100 W+50 W, 117db SPL

## MAIN FEATURES

- Low frequency: 8" woofer/2"v.c.
- High frequency: 1" driver/1.3"v.c.
- Frequency response: 70-18000 Hz ( $\pm 3$ dB)
- User controls: mic, line, master.
- Reproduction of voice and music for live and recorded performances
- Cabinet material: polypropilene, can also be used as a stage monitor
- For sound installations in environments requiring dynamics and sound pressure

## TECHNICAL SPECIFICATION

### LOUDSPEAKER

- System type: active 2 way

### COMPONENTS

- Low frequency: 8" woofer/2"v.c.
- High frequency: 1" driver/1.3"v.c.

### FEATURES

- Built-in amp LF/HF: 100+50W /4/8Ohm
- SPL max: 117dB @1m (free field)

### ACOUSTICAL SPECIFICATIONS

- SPL cont/peak: 111/117dB @1m (free field)
- Frequency response: 70-18000Hz ( $\pm 3$ dB)
- Coverage angle HxV: 80x60°
- Cross over frequency: 3500Hz

### ELECTRONICS

- Amplifier: AB class
- Power: 100+50W /4/8Ohm
- Input sensitivity: 4 dBu (1,228Vrms) adjustable
- Protection: limiter temp.
- User controls: mic, line
- Processor: analog
- Operating voltage/frequency: 100~120V/220~240V 60Hz/50Hz

### INPUT/OUTPUT CONNECTORS

- Input signal: XLR IN/OUT, jack 6.35 mm
- Power connection: VDE


### CABINET CONSTRUCTION

- Cabinet material: 4mm polypropilene
- Sospension system: eyebolt, 35 mm pole mount
- Angle: 60° monitor applications

### PHYSICAL

- Dimensions (WxHxD): 255x435x245mm
- Weight: 9.5kg

## TECHICAL DRAWINGS

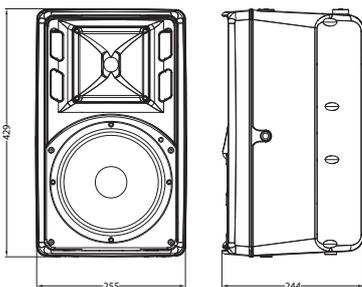

For more product  
info and downloads  
visit our website

