

EclProfile FWIPVW

Waterproofed High quality Variable White LED ellipsoidal, with linear CCT 2,700 K - 5,600 K



EclProfile FWIPVW is the IP Full White version of the new generation of Ecl Profile LED ellipsoids with Variable White source variants. The **EclProfile** FWIPVW has been engineered in the same housing and optical design of the colour mixing versions and for those users who require higher brightness and quality on a specific white point, offering a superior evenness and crisp focus of the new **EclProfile** range, or simply prefer to operate LED fixtures in a classical way. The LED source for both versions has been selected to achieve the finest quality of whites, having high scores of CRI, R9 and TM30 and being ideal for applications like corporate events, advertising, exhibitions, among others.

MAIN FEATURES

- IP rated for exterior applications
- Rotating gobo IP65 (optional)
- Linear white CCT from 2,700 K to 5,600 K.
- High lumen output and superior quality of whites (high CRI, TLCI, TM30).
- Silent operation and compatible with industry standard accessories.

VERSIONS

Code	Housing
ECLFWIPVWBK	Black
ECLFWIPVWWH	White

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 91x3 W high-power white LED
- CCT: from 2.700K to 6.500
- Luminous flux: (26° only TU) 3'696 lm; (26° only DY) 4'406 lm; (26°) 7'951 @full
- Lux: (26° only TU) 1'289 lx; (26° only DY) 1'524 lx; (26°) 2'759 lx @5 m full
- CRI: (only TU) 97,7; (only DY) 95,7; (@full) 96,3
- R9: (only TU) 86,2; (only DY) 90,9; (@full) 90,5
- TLCI: (only TU) 97; (only DY) 97; (@full) 98
- TM30 Rf: (only TU) >92; (only DY) >90; (@full) >92
- TM30 Rg: (only TU) >96; (only DY) >99; (@full) <102
- Source life expectancy: > 50.000 h

OPTICS

- Beam angle: optional 5° / 10° / 14° / 19° / 26° / 36° / 50° / 70° / 90°
zoom 15°-30° / zoom 25°-50° °
- Lens type: HD anti-reflection lenses with achromatic coating
- Focus: manual
- Other: see available accessories

COLOUR SYSTEM

- Colour mixing: warm white + cold white
- White presets: 2.700K - 5.600 K

DYNAMIC EFFECTS

- Rotating gobos: optional, see available accessories
- Gobo size: B, outer: 86 mm - image: 64,5 mm - thickness: 1,1 mm
- Static mode: selection of static dimmer
- Manual mode: manual adjustment of dimmer and strobe
- Auto mode: built-in programs with execution speed adjustment
- Special features: HIGH mode, AUTO mode and SILENT mode fan management

BODY

- Body: sturdy die-cast aluminium body
- Body colour: black

CONTROL

- Protocols: DMX512, RDM
- DMX channels: 2 / 3 / 4 / 6 / 12 channel
- RDM: RDM for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOXPRO/UPBOX2)
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Strobe / shutter: 1 - 25 Hz, electronic
- Operating temperature: -10° ~ +45°
- LED Control: flicker free operation
- Selectable PWM: 600 ~ 25.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 264 W
- Output (at 230V): 12 units on a single power line
- Power factor: 0,97
- Inrush current: <30A @115VAC / <50A @230VAC

PHYSICAL

- IP rating: 65 for temporary outdoor application, not for fixed installations
- Cooling: low noise fan
- Suspension and fixing: bracket for hanging and positioning
- Signal connection: Seetronic XLR 5p IN/OUT connectors
- Power connection: Seetronic powerCON TRUE IP65 IN/OUT
- Dimensions (WxHxD): 324x540x660 mm
- Weight: 10 kg

CERTIFICATIONS / APPROVALS

- Certifications / Approvals: CE, UKCA, RCM, cTUVus, FCC

ACCESSORIES & RELATED PRODUCTS

▪ ECLPRIPROTGOBO1BK/WH	Rotating gobo assembly for ECL Profile fixtures, black and white housing
▪ FCLECLPRIP	Flightcase to contain 6 pcs ECLFWIP / ECLCTPLUS with lenses 19°, 26°, 36°, 50°
▪ FCLECLPRLZ	Flightcase to contain 8 ECLPRLZ zoom lenses
▪ ECLPRPOYO	Pole operated yoke for ECL Profile fixtures
▪ ECLLB05/10BK	5°/10° lens barrel for Ecl Profile fixtures, filterframe included, black housing
▪ ECLPRL05/10/14 19/26/36/50/70/90BK	5°/10°/14°/19°/26°/36°/50°/70°/90° PRL lens barrel for EclProfile fixtures, black housing


▪ ECLPRLZ1530/2550BK	Zoom 15°-30°/25°-50° PRL lens barrel for EclProfile fixtures, black housing
▪ ECLPRTPG	Gel filter frame for ECL Profile PRL lens barrel, comp. with 19°, 26°, 36° and 50°
▪ ECLPRGHA	Gobo holder for ECL Profile fixtures, A size
▪ ECLPRGH	Gobo holder for ECL Profile fixtures
▪ ECLPRIRIS	Iris accessory for ECL Profile fixtures
▪ ECLPRSEF1	Soft edge filter and holder kit for ECL Profile fixtures
▪ ECLLZLLKA	Hexagonal head screw, to adapt and mount ECLLZ lenses on ECLCTPLUS and ECLFS

ACCESSORIES & RELATED PRODUCTS


▪ SPGM12	28mm spigot for fixtures, M12 bolt	▪ C6002B	Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black
▪ SPGM10	28mm spigot for fixtures, M10 bolt	▪ C6040B	Aluminum clamp for 28mm spigot, 200kg load, 48-51mm tubes, black
▪ IPTESTBOX	Portable vacuum and pressure tester for ProLights IP fixtures	▪ 938225L03	3x2.5mm TH07 Cable, 16A SETSAC3MX, 16A SETSAC3FX, L. 3m
▪ 9313FXWL03	Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, SETSAC3FX socket, L.3 m	▪ INF53415L03	Dmx cable HC5340. SETMC5MXXB XLR 5p->SETMC5FXXB XLR (f) 5p L.3m
▪ RSR0630B	Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black		

PRESET FULL ON

Beam angle 50%: 26°

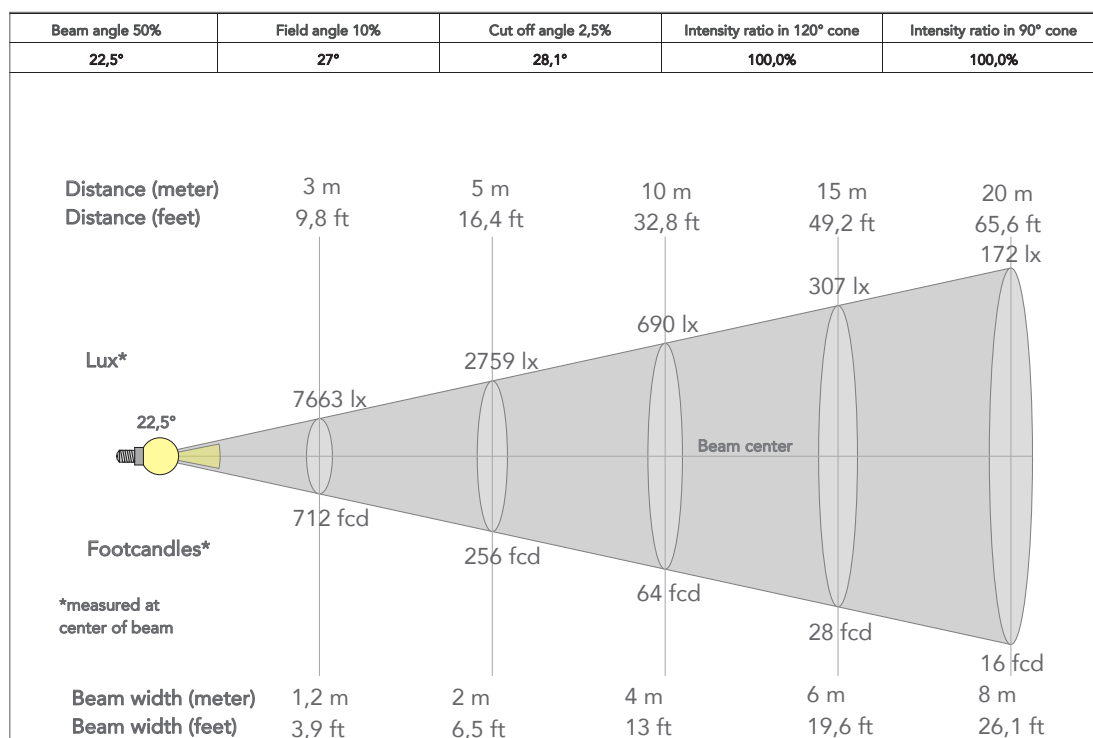

TECHICAL DRAWINGS

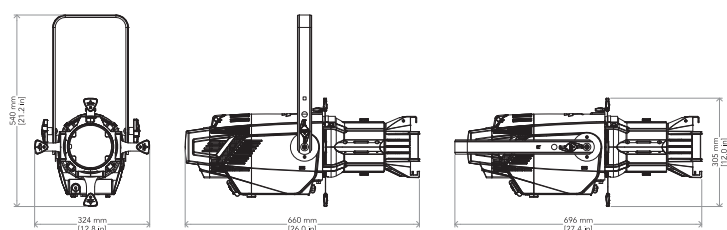

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
Certified to CSA STD: C22.2 NO. 166

Visit our website
for specifications and
tech documentations

