

ArcPod 27Q

27x10W RGBW/FC outdoor IP66 LED wash light for exterior installations

ORDER CODE: **ARCP0D27Q**



ArcPod 27Q is a compact high-power exterior wash light featuring an outstanding brightness of 11'200 lumens. It is equipped with 27x10W RGBW / FC LEDs, delivering a limitless reproduction of colours and whites. **ArcPod 27Q** is designed slim and fanless, and it's completed by a wide selection of available optics, making the **ArcPod 27Q** an incredibly flexible and versatile device for any outdoor install.

MAIN FEATURES

- 27x10W RGBW/FC LEDs delivering 11'200 lumens
- LED emitters controllable in 3 linear sections
- Compact form factor and fanless

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 27x10 W RGBW / FC LEDs
- Luminous flux: (10°) 9'437 lm; (15°) 11'179 lm; (25°) 10'757; (45°) 9'816 @full
- Lux: (10°) 17'953 lx; (15°) 14'017 lx; (25°) 6'340 lx; (45°) 1'454 lx @3 m full
- Lux: (10°) 6'463 lx; (15°) 5'046 lx; (25°) 2'282 lx; (45°) 523 lx @5 m full
- Source life expectancy: > 50.000 hrs (L70B10 @Ta 25° C / 77° F)

OPTICS

- Beam angle: 15 °
- Field angle: 28 °
- Additional optics: 10° - 25° - 45° (optional) - see available accessories
- Other: barn doors not included

COLOUR SYSTEM

- Colour mixing: RGBW / FC
- CCT: CCT control through dedicated DMX channel
- Colour wheel: virtual colour wheel with presets
- Macros: several pre-built macros with adjustable speed

DYNAMIC EFFECTS

- FX generator: up to 3 linear controllable sections
- Static mode: selection of static colour

BODY

- Tilt angle: 0 ~ 130 ° with manual regulation
- Body: sturdy die-cast aluminium body
- Body colour: RAL 7012

CONTROL

- Protocols: DMX512, RDM
- DMX channels: 5 / 7 / 10 / 13 / 17 channel
- Pixel control: up to 3 linear controllable sections
- RDM: RDM for remote monitoring and settings
- Display: user interface through DATAMASTER external coder (not included)
- Firmware upgrade: yes, via USB - DMX interface (UPBOXPRO/UPBOX1) not included
- Master/Slave: for synchronised operation of more units linked in a chain

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Operating temperature: -20° C / +45° C (-4° F / +113° F)
- LED Control: flicker free operation
- Selectable PWM: 600 ~ 25.000 Hz

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 270 W
- Output (at 230V): 9 units on a single power line
- Power factor: 0,97
- Inrush current: 110VAC/6.75A, 230VAC/10.25A

PHYSICAL

- IP rating: 66 for outdoor installations
- IK rating: 08
- Cooling: passive cooling and fan-free
- Adaptors: XLR and BARE END 16A adaptors included
- Signal connection: 1,8 m moulded IP signal IN connector
- Power connection: 1,8 m moulded IP signal IN/OUT connectors
- Dimensions (WxHxD): 455x258x83 mm
- Weight: 9 kg

CERTIFICATIONS / APPROVALS


- Certifications / Approvals: CE, UKCA, RCM, cTUVus, FCC

ACCESSORIES & RELATED PRODUCTS

- | | | | |
|---|---|-----------------------|--|
| ▪ C6002B | Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black | ▪ S27QBD | Black barn door 4 directional flaps to adjust the light beam, SOLAR27Q, ARCP0D27Q |
| ▪ FCLA27Q | Flight case for 5 pcs of ARCP0D27Q | ▪ DATAMASTER | RDM/DMX tool, cable tester, 5p XLR connectors, pouch, charging cable, XLR adapters |
| ▪ RSR0630B | Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black | ▪ AWEXAC1L03/05/10/20 | IP67 power extension cable for outdoor architectural projectors, L.03/05/10/20 m |
| ▪ A27QFILTER20 30/40/60/80 | 20°/30°/40°/60°/80° symmetric light diffusion filter for ARCP0D27Q, 11,4x33,7 cm | ▪ AWEXDC1L03/05/10/20 | IP67 DMX extension cable for outdoor architectural projectors, L.03/05/10/20 m |
| ▪ A27QFILTER1090/1060 3060/9010/6010/6030 | 10°x90°/10°x60°/30°x60°/90°x10°/60°x10°/60°x30° asymmetric light diffusion filter for ARCP0D27Q, 11,4x33,7 cm | ▪ UPBOX1U | Firmware uploader kit, USB IN, 3pin XLR DMX OUT, USB OUT |
| ▪ S27QLENS10/15/25/45 | 10°/15°/25°/45° lens for SOLAR27Q, ARCP0D27Q, SOLAR48Q, ARCP0D48Q, ARCP0D15Q and ARCP0D96Q | | |


PRESET FULL ON

Beam angle 50%: 15°

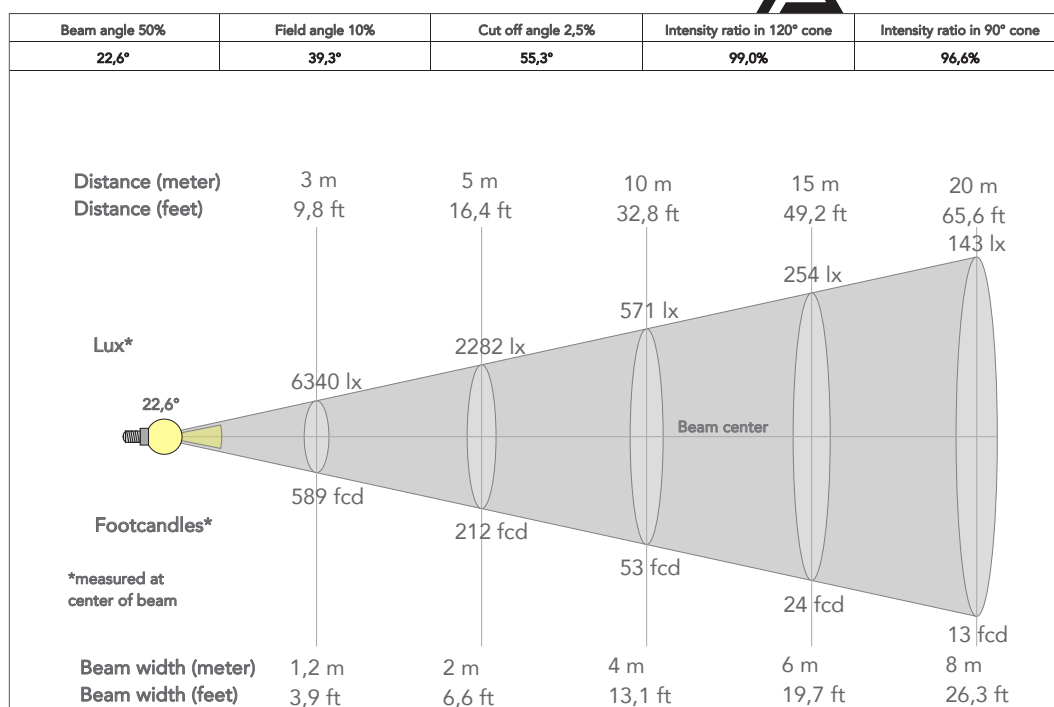


PRESET FULL ON

Beam angle 50%: 45°

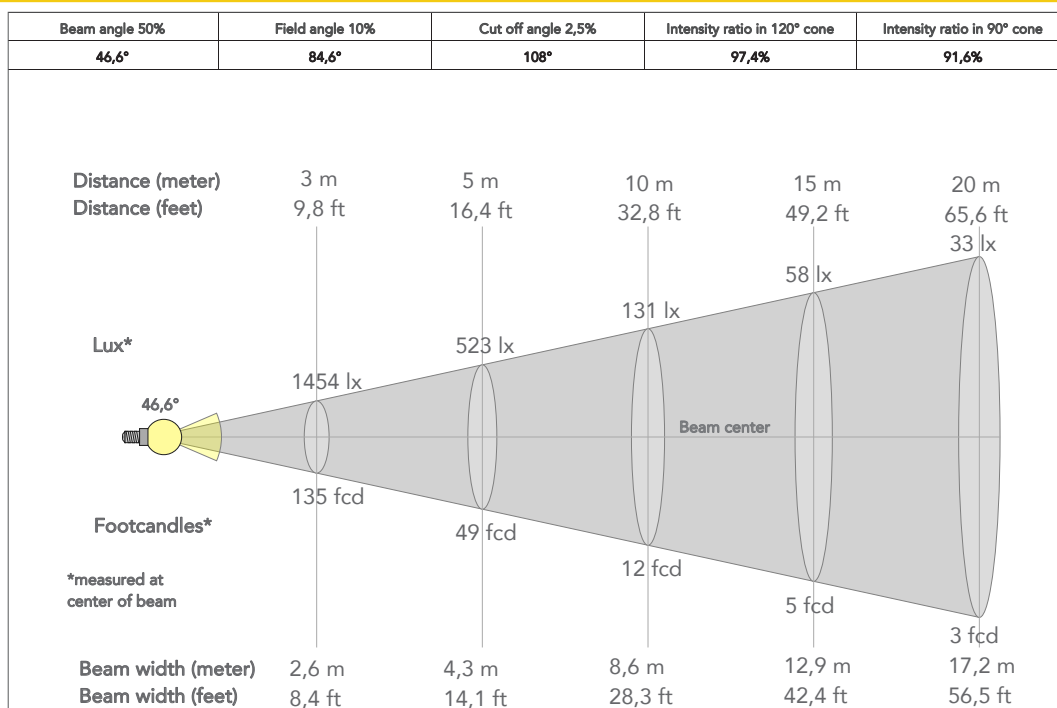

TECHNICAL DRAWINGS

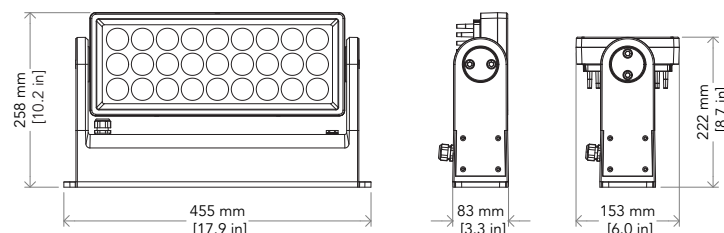

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
Certified to CSA STD: C22.2 NO. 166

Visit our website
for specifications and
tech documentations

