

# Touring 15MP

Stage monitor, cx 2-way (15"Nd LF+1.4"Nd HF ) 400/800W AES/P 8Ohm, 130dB SPL



Passive stage-monitor, coaxial design, 2-way 400 W AES, 130dB SPL

## MAIN FEATURES

- Low frequency: 15" neodymium woofer/3" v.c.
- High frequency: 1.4" neodymium driver/3" v.c.
- Frequency response: 65-18000 Hz ( $\pm 3$ dB)
- Excellent clarity in the monitoring of voice and music for live and recorded performances
- Installed into theatres and congress halls owing to excellent acoustic performance
- Birch plywood enclosure

## TECHNICAL SPECIFICATION

### LOUDSPEAKER

- System type: passive stage monitor, coaxial design

### COMPONENTS

- Low frequency: 15" neodymium woofer / 3" v.c.
- High frequency: 1.4" neodymium driver / 3" v.c.

### FEATURES

- AES/program power: 400/800 W
- SPL max: 130 dB @1m (free field)

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 99 dB
- Impedance: 8 Ohm
- SPL cont/peak: 124/130 dB @1m (free field)
- Frequency response: 65-18000 Hz ( $\pm 3$ dB)
- Coverage angle HxV: 60x40 °
- Cross over frequency: 1200 Hz
- Protection: H.F. signal compression
- Recommended amplifier up to: 800 W /8Ohm

### INPUT/OUTPUT CONNECTORS

- Input signal: Neutrik NL4 IN/OUT

### CABINET CONSTRUCTION

- Cabinet material: 18 mm birchplywood
- Suspension system: eyebolt, fly track, 35 mm pole mount
- Angle: 50 ° monitor applications
- Handles: 2 on side


### PHYSICAL

- Dimensions (WxDxH): 582x410x558 mm
- Weight: 20 kg

## ACCESSORIES & RELATED PRODUCTS

- BAGTOURING15M Fabric protection for DAD TOURING15MA/TOURING15MP

## TECHICAL DRAWINGS

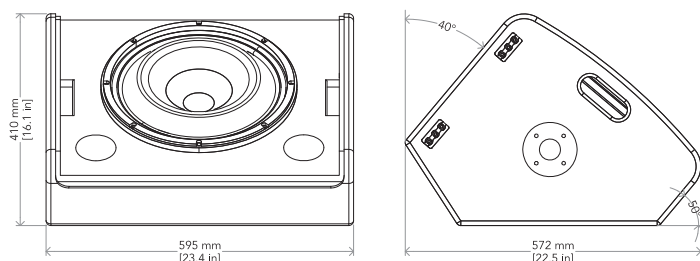

Visit our website  
for specifications and  
tech documentations

