

# Touring 15MA

Active cx monitor, D-cl. 700 +DSP, 2-way (15"LFNd+1.4" HF Nd),130dB SPL



Active stage-monitor, coaxial design, D-class amplifier, 2-way 700 W,127db SPL

## MAIN FEATURES

- Low frequency: 15" neodymium woofer/3"v.c.
- High frequency: 1.4" neodymium driver/3"v.c.
- Frequency response: 60-18000 Hz ( $\pm 3$ dB)
- Excellent clarity in the monitoring of voice and music for live and recorded performances
- Installed into theatres and congress halls owing to excellent acoustic performance
- Birch plywood enclosure
- DSP with 4 presets (flat eq-cut 80 Hz-cut 60 Hz-punch eq) for selection of optimal frequency response

## TECHNICAL SPECIFICATION

### LOUDSPEAKER

- System type: active 2 way coaxial

### COMPONENTS

- Low frequency:15 " neodymium woofer / 3" v.c.
- High frequency:1.4 " neodymium driver / 3" v.c.

### FEATURES

- Built-in amp:700 W

### ACOUSTICAL SPECIFICATIONS

- SPL cont/peak:124/130 dB @1m (free field)
- Frequency response:60-18000 Hz ( $\pm 3$ dB)
- Coverage angle HxV:60x40 °
- Cross over frequency:1200 Hz

### ELECTRONICS SPECIFICATIONS

- Amplifier: digital
- Input sensitivity: 4 dBu (1,228Vrms) adjustable
- Protection: RMS limiter, fast limiter, temp.
- User controls: flat eq-cut 80Hz-cut 60Hz-punch eq
- Processor: DSP
- Operating voltage/frequency: 220 V  $\pm 10\%$ , 50 Hz

### INPUT/OUTPUT CONNECTORS

- Input signal: XLR IN/OUT
- Power connection: VDE IN

### CABINET CONSTRUCTION

- Cabinet material:18 mm birchplywood
- Suspension system: eyebolt, fly track, 35 mm pole mount
- Angle:50 ° monitor applications
- Handles: 2 on side


### PHYSICAL

- Dimensions (WxHxD):528x410x558 mm
- Weight:22 kg

## ACCESSORIES & RELATED PRODUCTS

- BAGTOURING15M Fabric protection for DAD TOURING15MA/TOURING15MP

## TECHICAL DRAWINGS

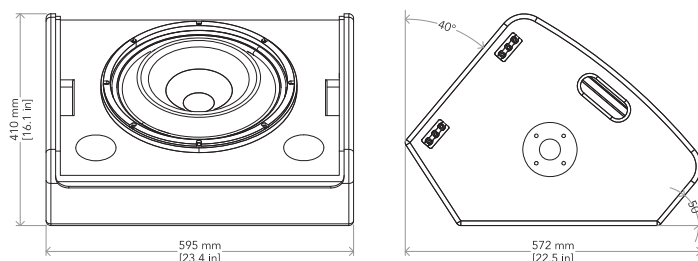

Visit our website  
for specifications and  
tech documentations

