

Touring 15P

Loudspeaker 2-way (15"Nd LF+2" HF) 500/1000W AES/P 8Ohm, 131dB SPL



2-way passive loudspeakers, 500 W AES, 131dB SPL

MAIN FEATURES

- Low frequency: 15" neodymium woofer/3" v.c.
- High frequency: 2" driver/3" v.c.
- Frequency response: 50-18000 Hz (± 3 dB)
- Excellent clarity in the reproduction of voice and music for live and recorded performances
- Installed into theatres and congress halls owing to excellent acoustic performance
- Birch plywood enclosure, designed for stage-monitor application

TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: passive 2 way

COMPONENTS

- Low frequency: 15" neodymium woofer / 3" v.c.
- High frequency: 2" driver/3" v.c.

FEATURES

- AES/program power: 500/1000 W
- SPL max: 131 dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 99 dB
- Impedance: 8 Ohm
- SPL cont/peak: 125/131 dB @1m (free field)
- Frequency response: 50-18000 Hz (± 3 dB)
- Coverage angle HxV: 90x60 °
- Cross over frequency: 1100 Hz
- Protection: H.F. signal compression
- Suggest HPF range: 80/120 Hz
- Recommended amplifier up to: 1000 W /8Ohm

INPUT/OUTPUT CONNECTORS

- Input signal: Neutrik NL4 IN/OUT

CABINET CONSTRUCTION

- Cabinet material: 18 mm birchplywood
- Suspension system: eyebolt, fly track, 35 mm pole mount
- Angle: 50-30 ° monitor applications
- Handles: 2 on side


PHYSICAL

- Dimensions (WxHxD): 430x755x405 mm
- Weight: 32.5 kg

ACCESSORIES & RELATED PRODUCTS

- BAGTOURING15 Fabric protection for DAD TOURING15AG2/TOURING15P

TECHICAL DRAWINGS

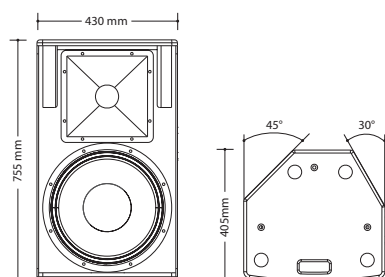

Visit our website
for specifications and
tech documentations

