


# Touring 208A

Active louds. D-cl. 700W +DSP, 3-way (8" Nd LF+8" MF+1" HF Cx), 126dB SPL

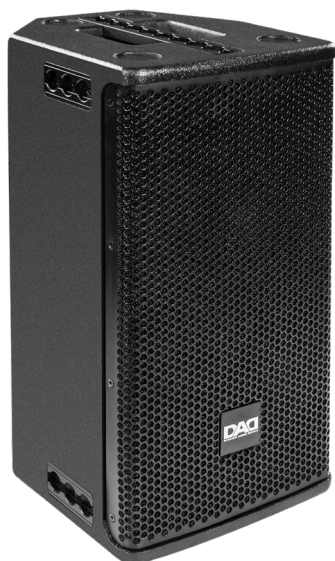

Active loudspeaker, D-class amplifier, 3-way 700 W, 126dB SPL

## MAIN FEATURES

- Low frequency: 8" neodymium woofer/2" v.c.
- Mid frequency: 8" midrange / 2" v.c.
- High frequency: 1" coaxial driver/1.7" v.c.
- Frequency response: 55-18000 Hz ( $\pm 3$ dB)
- Excellent clarity in the reproduction of voice and music for live and recorded performances
- Installed into theatres and congress halls owing to excellent acoustic performance
- Birch plywood enclosure, designed for stage-monitor application
- DSP with 4 presets (full range-HPF-coupling-monitor) for selection of optimal frequency response

## TECHNICAL SPECIFICATION

### LOUDSPEAKER

- System type: active 3 way

### COMPONENTS

- Low frequency: 8" neodymium woofer / 2" v.c.
- Mid frequency: 8" midrange / 2" v.c.
- High frequency: 1" coaxial driver/1.7" v.c.

### FEATURES

- Built-in amp: 700 W
- SPL max: 126 dB @1m (free field)

### ACOUSTICAL SPECIFICATIONS

- SPL cont/peak: 120/126 dB @1m (free field)
- Frequency response: 55-18000 Hz ( $\pm 3$ dB)
- Coverage angle HxV: 100x100 °
- Cross over frequency: 200-2000 Hz

### ELECTRONICS SPECIFICATIONS

- Amplifier: digital
- Input sensitivity: 4 dBu (1,228Vrms) adjustable
- Protection: RMS limiter, fast limiter, temp.
- User controls: full range-HPF-coupling-monitor
- Processor: DSP
- Operating voltage/frequency: 220 V  $\pm 10\%$ , 50 Hz

## ACCESSORIES & RELATED PRODUCTS

- BAGTOURING208 Fabric protection for DAD TOURING208A/TOURING208P

### INPUT/OUTPUT CONNECTORS

- Input signal: XLR IN/OUT
- Power connection: VDE IN


### CABINET CONSTRUCTION

- Cabinet material: 18 mm birchplywood
- Suspension system: eyebolt, fly track, 35 mm pole mount
- Angle: 45-25 ° monitor applications
- Handles: 1 top

### PHYSICAL

- Dimensions (WxHxD): 244x490x270 mm
- Weight: 18 kg

## TECHICAL DRAWINGS

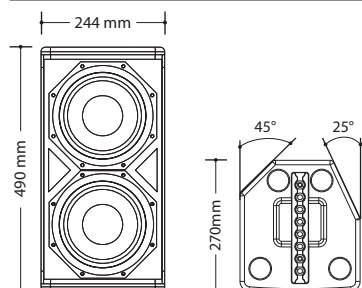

Visit our website  
for specifications and  
tech documentations

