

Touring 218SP

Subwoofer 3000/6000W AES/P, (2x18"Nd LF) 4Ohm, 140dB SPL



Passive subwoofer, 3000 W AES, 140db SPL

MAIN FEATURES

- Low frequency: 2X18" woofer/4"v.c.
- Frequency response: 35-150 Hz (± 3 dB)
- Subwoofer for reinforcement of low frequencies in live and recorded performance
- Installed into theatres and congress halls owing to excellent acoustic performance
- Birch plywood enclosure

TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: passive subwoofer

COMPONENTS

- Low frequency: 2X18" woofer/4"v.c.

FEATURES

- AES/program power: 3000/6000 W
- SPL max: 140 dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- Sensitivity: 106 dB @1W/1m (free field)
- Impedance: 8 Ohm
- SPL cont/peak: 134/140 dB @1m (free field)
- Frequency response: 35-150 Hz (± 3 dB)
- Coverage angle HxV: ° omnidirectional
- Suggest LPF range: 80-150 Hz
- Recommended amplifier up to: 6000 W /4Ohm

INPUT/OUTPUT CONNECTORS

- Input signal: Neutrik NL4 IN/OUT

CABINET CONSTRUCTION

- Cabinet material: 22 mm birchplywood
- Suspension system: eyebolt, fly track, 35 mm pole mount
- Handles: 10 on side


PHYSICAL

- Dimensions (WxHxD): 1100x561x780 mm
- Weight: 92 kg

ACCESSORIES & RELATED PRODUCTS

- BAGTOURING218S Fabric protection for DAD TOURING218A/TOURING218P

TECHICAL DRAWINGS

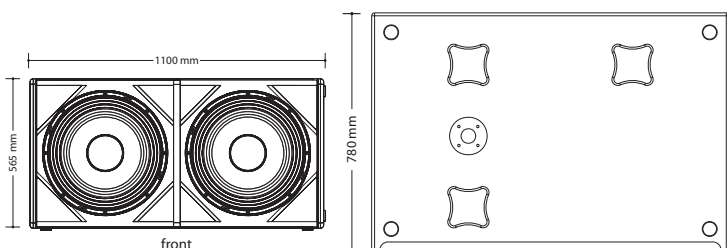

Visit our website
for specifications and
tech documentations

