

Touring 218SA

Active subwoofer, D-class 3000W amp+DSP,(2x18"Nd LF),140dB SPL



Active subwoofer, D-class amplifier, 3000 W,140db SPL

MAIN FEATURES

- Low frequency: 2x18" woofer/4"v.c.
- Frequency response: 30-150 Hz (± 3 dB)
- Subwoofer for reinforcement of low frequencies in live and recorded performance
- Installed into theatres and congress halls owing to excellent acoustic performance
- DSP with 4 presets (punch-extended low-coupling-infra) for selection of optimal frequency response



TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: active subwoofer

COMPONENTS

- Low frequency: 2x18" woofer/4"v.c.

FEATURES

- Built-in amp: 3000 W
- SPL max: 140 dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- SPL cont/peak: 136/140 dB @1m (free field)
- Frequency response: 30-150 Hz (± 3 dB)
- Coverage angle HxV: ° omnidirectional

ELECTRONICS SPECIFICATIONS

- Amplifier: digital
- Input sensitivity: 4 dBu (1,228Vrms) adjustable
- Protection: RMS limiter, fast limiter, temp.
- User controls: punch-extended low-coupling-infra
- Processor: DSP
- Operating voltage/frequency: 220 V $\pm 10\%$, 50 Hz

INPUT/OUTPUT CONNECTORS

- Input signal: XLR IN/OUT
- Power connection: powerCON IN/OUT

CABINET CONSTRUCTION

- Cabinet material: 24 mm birchplywood
- Suspension system: 35 mm mounting pole
- Handles: 10 on side


PHYSICAL

- Dimensions (WxHxD): 1100x561x780 mm
- Weight: 93.5 kg

ACCESSORIES & RELATED PRODUCTS

- BAGTOURING218S Fabric protection for DAD TOURING218A/TOURING218P

TECHICAL DRAWINGS

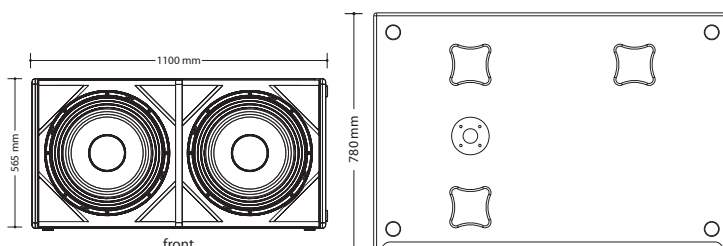

Visit our website
for specifications and
tech documentations

