

# Touring 10P

Loudspeaker 2-way (10" LF+1.4"Nd HF) 350/700W AES/P 8Ohm, 128dB SPL



2-way passive loudspeakers, 250 W AES, 128db SPL

## MAIN FEATURES

- Low frequency: 10" woofer/2.5"v.c.
- High frequency: 1.4" neodymium driver/3"v.c.
- Frequency response: 65-18000 Hz ( $\pm 3$ dB)
- Excellent clarity in the reproduction of voice and music for live and recorded performances
- Installed into theatres and congress halls owing to excellent acoustic performance
- Birch plywood enclosure, designed for stage-monitor application

## TECHNICAL SPECIFICATION

### LOUDSPEAKER

- System type: passive 2 way

### COMPONENTS

- Low frequency: 10" woofer/2.5"v.c.
- High frequency: 1.4" neodymium driver / 3" v.c.

### FEATURES

- AES/program power: 250/500 W
- SPL max: 128 dB @1m (free field)

### ACOUSTICAL SPECIFICATIONS

- Sensitivity: 98 dB @1W/1m (free field)
- Impedance: 8 Ohm
- SPL cont/peak: 122/128 dB @1m (free field)
- Frequency response: 65-18000 Hz ( $\pm 3$ dB)
- Coverage angle HxV: 80x50 °
- Cross over frequency: 1400 Hz
- Protection: H.F. signal compression
- Suggest HPF range: 80/120 Hz
- Recommended amplifier up to: 500 W /8Ohm

### INPUT/OUTPUT CONNECTORS

- Input signal: Neutrik NL4 IN/OUT

### CABINET CONSTRUCTION

- Cabinet material: 18 mm birchplywood
- Suspension system: eyebolt, fly track, 35 mm pole mount
- Angle: 25-45 ° monitor applications
- Handles: 2 on side, 1 top


### PHYSICAL

- Dimensions (WxHxD): 340x570x335 mm
- Weight: 21.4 kg

## ACCESSORIES & RELATED PRODUCTS

- BAGTOURING10 Fabric protection for DAD TOURING10A/TOURING10P

## TECHICAL DRAWINGS

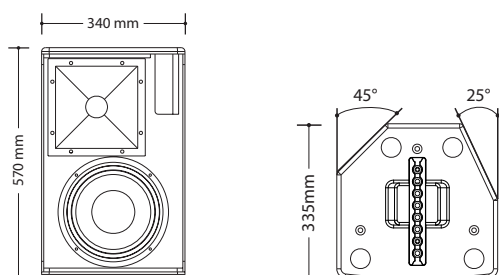

Visit our website  
for specifications and  
tech documentations

