

# EclFresnel CT+MIP

350 W IP65 Led Fresnel with 6 color source, 200mm-8" lens

ORDER CODE: **ECLFRCTPMIPBK**



**EclFresnel CT+MIP** is an IP65 350W LED Fresnel, engineered with a new 6 colours light source and a 200mm / 8" glass Fresnel lens. Being IP65 rated, the unit is both water and dust resistant ensuring safe application in any set or extreme locations, keeping lightweight and not scaling up in sizes.

The newly designed optical system allows a greater zoom range from 9° to 80°, keeping and high efficiency also at a narrow beam angle.

The Spektra calibrated light source delivers consistency in operations, higher luminous flux in both colours and whites CCT keeping a broader color space and richer light spectrum to achieve unprecedented values of CRI, TLCI and TM30.

Fixtures of the **EclFresnel CT+** range brings more power in their processing unit, offering an ultimate user experience in terms of control of the light and colours and as well more intuitive stand alone operations through a larger display, backlight encoders, and advanced connectivity both wired and wireless.

Completed by a wide range of accessories including 8 leaf barndoors and P.O. bracket, the **EclFresnel CT+** also performs silent, allowing to be the indispensable workhorse for Broadcast, Film and Theatre applications.

## MAIN FEATURES

- 350W IP65 6 colour LED Fresnel with 200mm/8" glass lens
- 9-80° Manual zoom system
- High quality CCT reproduction and advanced color control
- New UI with 2.8" display and 4 backlit pushable encoder

## TECHNICAL SPECIFICATION

### LIGHT SOURCE

- Light source: Proprietary source manufactured in Europe by PROLIGHTS
- Source: 350W 6 colour LEDs source
- Luminous flux: (9,4°) 3'867 lm - (80,8°) 9'827 @4.000 K
- Lux: (9,4°) 5'706 lx - (80,8°) 451lx @5m @4.000 K
- CRI: 97 @3.200K; 96,8 @5.600 K
- R9: 91,7 @3.200K; 96,9 @5.600 K
- TLCI: 88 @3200K; 94 @5.600 K
- TM30 Rf: > 94 @3.200K; > 94 @5.600 K
- TM30 Rg: < 102 @3.200K; < 103 @5.600 K
- Source life expectancy: > 50.000 h

### OPTICS

- Zoom: 9,4° - 80,8° manual
- Lens diameter: 8" / 200mm / 0.31"
- Lens type: Fresnel glass lens with AR coating
- Lens effect: Glass Fresnel lens providing a classic light fall-off
- Additional optics: PC lens available as accessory
- Other: spigot, barndoor and gel frame included

### COLOUR SYSTEM

- Colour control: XY, CCT, Gel with Source Emulation, Tungsten emulation, HSI, User preset
- Colour mixing: 6 colour LEDs source
- CCT: Linear CCT adjustment from 1.850 K-20.000K

### BODY

- Bracket system: Sliding bracket for adjustable weight balance
- Hardware on-board: filter frame, 8 doors barndoor, spigot
- Body: weatherproof IP65 construction with die-cast magnesium alloy
- Body colour: RAL 9004
- Other: Strengthened zoom movement system for enhanced durability and stability

### CONTROL

- Protocols: DMX512, RDM, CRMX
- Stand Alone: 4 pushable RGB backlit encoder
- Wireless Control: included, LumenRadio TimoTwo DMX/RDM compatible with both CRMX, CRMX2 (Lumen Radio) and W-DMX

(Wireless DMX), Bluetooth capable

- RDM: RDM for remote monitoring and settings
- Display: 2.8" Color display
- Firmware upgrade: yes, via USB - DMX interface (UPBOXPRO) not included
- Master/Slave: for synchronised operation of more units linked in a chain

### ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 6 selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Operating temperature: -20° ~ +45°
- LED Control: flicker free frequency with adjustable PWM
- Selectable PWM: 1282 ~ 40.000 Hz

### ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Low Voltage DC mains: 48V
- Max power consumption: 350W
- Output (at 230V): 9 units on a single power line
- Power factor: > 0,94
- Inrush current: 110VAC/25.5A, 230VAC/55A

### PHYSICAL

- IP rating: 65 for temporary outdoor use (\*)
- Cooling: combination of heat pipe cooling system and low noise fan
- Signal connection: IP65 Seetronic XLR 5p IN/OUT connectors
- Data connection: IP65 WEIPU SF12 4P-F
- Power connection: Seetronic powerCON TRUE IP65 IN/OUT
- Low Voltage DC connector: XLR 3p for 48V
- Dimensions (WxHxD): 338x573x428mm / 13.31"x22.56"x16.85"
- Weight: 10,9kg / 24.03lbs
- (\*) NOTE: Suitable for permanent outdoor use, provided installation and maintenance cycles by qualified technicians are carried.

### CERTIFICATIONS / APPROVALS

- Certifications / Approvals: CE, RCM, cTUVus


## ACCESSORIES & RELATED PRODUCTS

- ECLFRCTPMPCLK PC lens kit for ECLFRCTPM series
- ECLFRCTPM10PADPBK 250mm-10" frontal adapter for ECLFRCTPM series, black
- FCLECLFRCTPM Flight case for 4 pcs of ECLFRCTPM / MIP series
- FCLECLFRCTPMR2 Flight case for 4 pcs of ECLFRCTPM / MIP series
- ECLFRCTPMBAG1U Empty ABS case for 1 pc of ECLFRCTPM series
- ECLFRCTPMKPOYO Pole operated aluminium yoke bracket and zoom kit for ECLFRCTPM series
- ECLFRSPG Spigot for PROLIGHTS fixtures
- ECLFRCTPMFFBK Filter frame for ECLFRCTPM
- ECLFRCTPMBDBK Barn door 8 directional flaps to adjust the light beam for ECLFRCTPM
- ECLFRCTPMBDR2BK Barn door 8 directional flaps to adjust the light beam for ECLFRCTPM series
- LRTM2SPIBK CRMX Timo Two SPI kit
- EFSBUFDS SNAPBAG - Universal SMALL DEEPER for BARNDOORS
- SPGM10 28mm spigot for fixtures, M10 bolt
- SPGM12 28mm spigot for fixtures, M12 bolt

- UPBOXPRO Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector
- UPBOX2P5 Firmware uploader kit, USB IN, 5-pin XLR DMX OUT
- C6040B Aluminum clamp for 28mm spigot, 200kg load, 48-51mm tubes, black
- TOUR53415L03 Dmx cable HC5340. CANS5MXX XLR 5p->CANS5FXX XLR (f) 5p, L.3m
- 958225L03 3x2.5mm TH07 Cable, 16A 3p PwCon MXW, 16A 3p PwCon FXW, L.3m
- 9513FXWL03 Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FXW socket, L.3 m
- RSR0630B Steel security cable for hanging bodies, inox steel shackle, L=60 cm, black
- C6002B Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black
- 9533FXWL03 Ass. 3x2.5mm TH07 cable, SHUKO plug, MENAC3FXW socket, L.3m


## PRESET HB 4000K

Beam angle 50%: 9,3°

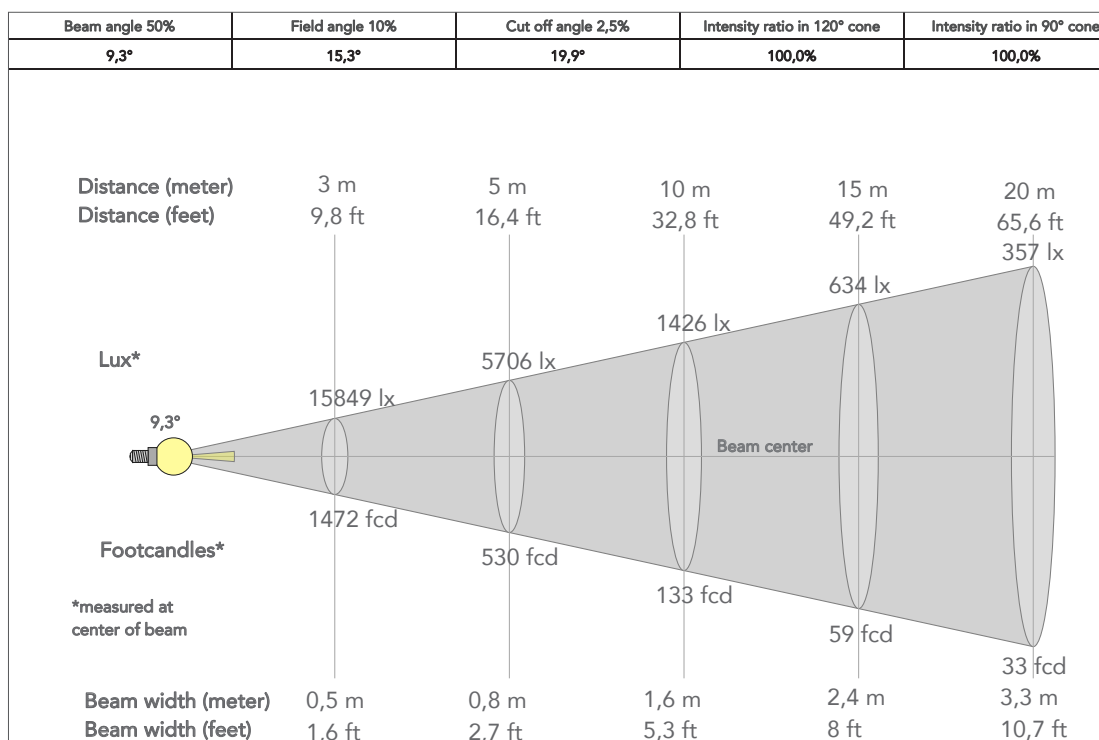

## TECHICAL DRAWINGS

## CERTIFICATIONS / APPROVALS

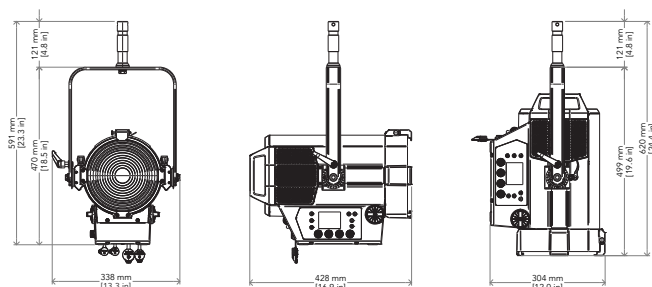

Conforms to UL STD. 1573  
Certified to CSA STD: C22.2 NO. 166

Visit our website  
for specifications and  
tech documentations

