

# EclPar IPMVW

100W IP65 Variable White single source LED PAR



**EclPar IPMVW** is a flexible IP rated single source LED spotlight, featuring an 100W Variable White light source with high efficiency and advanced colour control.

Its Spektra calibrated LED source delivers a high-quality white reproduction with high CRI and TM30 with an advanced control over colours, ensuring consistency across fixtures.

The unit is compact and completely fan free, making the **EclPar IPMVW** a workhorse for any outdoor and dusty environment, but as well as for corporate and studio whereas silent operations are required.

The flexible optical system allow a wide selection of lenses from narrow 15° (on board), flood 30°, and ultra wide 60°, which can be quickly mounted in front of the luminaire or inside the front tempered glass for lasting exterior installation.

## MAIN FEATURES

- 100W Spektra calibrated Variable White LED delivering high CRI, TLCI, TM30 values
- Flex lens system: 15° on-board - 30° and 60° optional
- IP65 for exterior application, fan free

## VERSIONS

Code	Housing
ECLPARIPMVWBK	Black

## TECHNICAL SPECIFICATION

### LIGHT SOURCE

- Source: 100 W Variable White LED
- Luminous flux: (15°) 4'571; (30°) 4'329; (60°) 4'414 lm @full
- Lux: (15°) 3'072; (30°) 451; (60°) 163 lx @5 m full
- CRI: 97,6 @full; 97,1 @2'700K; 96,4 @6'500K
- R9: 95 @full; 83,7 @2'700K; 94,1 @6'500K
- TLCI: 99 @full; 97 @2'700K; 98 @6'500K
- TM30 Rf: 93,3 @full; 93,7 @2'700K; 91,5 @6'500K
- TM30 Rg: 100,5 @full; 97,1 @2'700K; 98,1 @6'500K
- Source life expectancy: > 50.000 h

### OPTICS

- Beam angle: (on-board) 15° - (opt) 30°, 60°
- Field angle: (on-board) 24°
- Lens diameter: 172 mm
- Lens type: parabolic reflector in combination with HD fresnel lens
- Additional optics: (opt) 30°, 60°
- Other: possible to mount lens both on the internal side and on the external side

### COLOUR SYSTEM

- Colour mixing: tunable white
- CCT: CCT control through dedicated DMX channel
- White presets: 2.700 K ~ 6.500 K
- Macros: built-in white presets

### DYNAMIC EFFECTS

- Static mode: selection of static dimmer and color temperature
- Manual mode: manual adjustment of colour
- Auto mode: built-in programs with execution speed adjustment

### BODY

- Body: sturdy die-cast aluminium body
- Body colour: black
- Other: Front mount holder for accessories as barn door, filter frame

### CONTROL

- Protocols: DMX512, RDM, CRMX
- DMX channels: 1 / 2 / 4 / 5 / 9 / 11 channel

- Wireless Control: optional, LumenRadio Timo Fx DMX/RDM compatible with both CRMX (Lumen Radio) and W-DMX (Wireless DMX)
- RDM: RDM for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOXPRO/UPBOX1) not included
- Master/Slave: for synchronised operation of more units linked in a chain

### ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer
- Dimmer curves: 4 selectable dimming modes available
- Strobe / shutter: 1 - 30 Hz, electronic
- Operating temperature: -20° C / +45° C (-4° F / +113° F)
- LED Control: flicker free operation
- Selectable PWM: 600 ~ 40.000 Hz

### ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 117 W
- Output (at 230V): 24 units on a single power line
- Power factor: > 0,93

### PHYSICAL

- IP rating: 65 for temporary outdoor application, not for fixed installations
- Cooling: passive cooling and fan-free
- Suspension and fixing: double hanging bracket suitable for safe hanging and for floor positioning
- Signal connection: Seetronic XLR 5p IN/OUT connectors
- Power connection: Seetronic powerCON TRUE IP65 IN/OUT
- Dimensions (WxHxD): 262x327x213 mm
- Weight: 4,1 kg
- (\*) NOTE: Suitable for permanent outdoor use, provided installation and maintenance cycles by qualified technicians are carried.

### CERTIFICATIONS / APPROVALS


- Certifications / Approvals: CE, UKCA, RCM, cTUVus, FCC

## ACCESSORIES & RELATED PRODUCTS


▪ FCLECLPARIPM	Flight case for 6 pcs of ECLPARIPM series	▪ SPGM12	28mm spigot for fixtures, M12 bolt
▪ EPIPMBAG1U	Empty ABS case for 1 pc of ECLPARIPM series	▪ UPBOX1UP5	Firmware uploader kit, USB IN, 5p XLR DMX OUT, DMX OUT
▪ ECLPARIPMBDBK	Barn door with 8 directional flaps to adjust the light beam for ECLPARIPM	▪ UPBOXPRO	Firmware uploader kit, USB IN, 5-pin XLR DMX OUT connector
▪ ECLPARTPG	Gel filter frame for ECLPAR projectors	▪ TOUR53415L03BK	Dmx cable HC5340. CANCEMXX XLR 5p->CANCE5FXX XLR (f) 5p
▪ EPIPMRFFBK	Round filter frame for ECLPARIPM series black	▪ 958215L03	3x1.5mm TH07 Cable, 16A 3p PwCon MXW, 16A 3p PwCon FXW
▪ ECLPARIPMWBK	CRMX Timo Fx kit for ECLPARIPM series black	▪ 9513FXWL03	Ass. 3x2.5mm TH07 cable, 16A 3p 230V CEE plug, MENAC3FXW socket
▪ EPIPMLENS15/30/60	ECLPARIPM series lens 15°/30°/60°	▪ RSR0630B	Steel security cable for hanging bodies, inox steel shackle
▪ EPIPMFILT1020/1040 1060/3060	Light diffusion filter for ECLPARIPM, asymmetric 10°x20°, 10°x40°, 10°x60°, 30°x60°	▪ C6002B	Slim aluminium clamp, 200 kg loading, 48-51 mm tubes, M10 bolt
▪ EPIPMFHBK	Filter holder for ECLPARIPM series	▪ 9533FXWL03	Ass. 3x2.5mm TH07 cable, SCHUKO plug, MENAC3FXW socket
▪ EPIPMFSNOOTBK	Full snoot for ECLPARIPM series		
▪ EPIPMHLOUVREBK	Honeycomb louvre for ECLPARIPM series		
▪ SPGM10	28mm spigot for fixtures, M10 bolt		

## PRESET FULL ON

Beam angle 50%: 15°

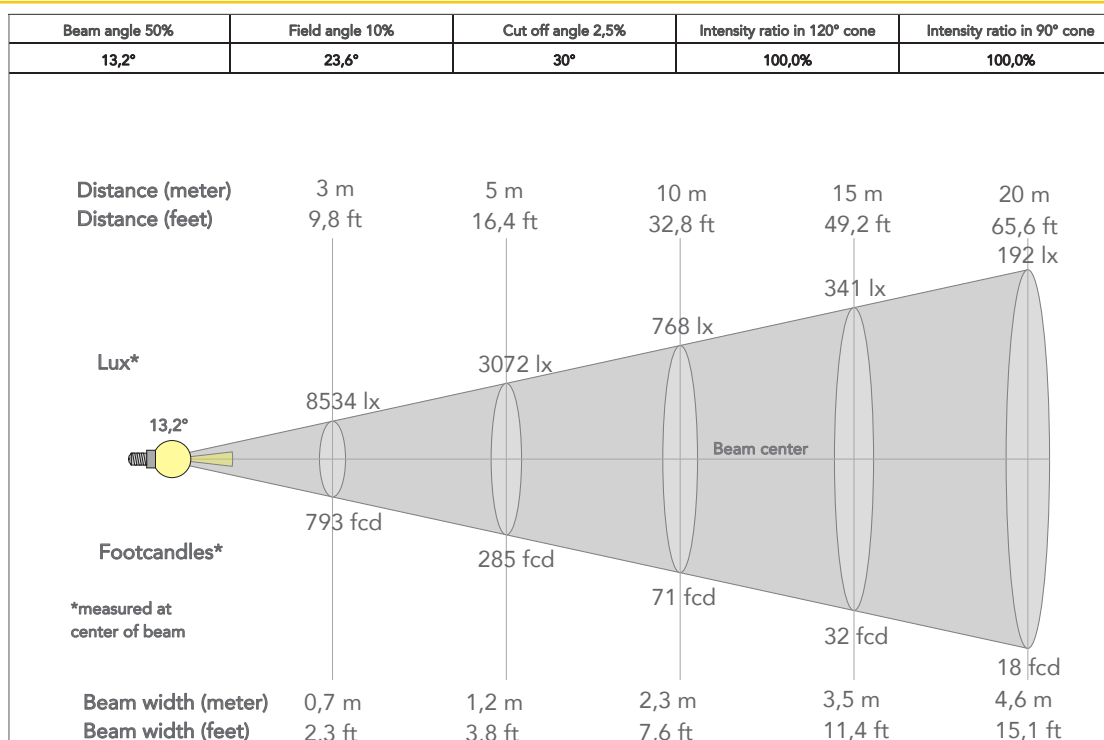

## TECHICAL DRAWINGS

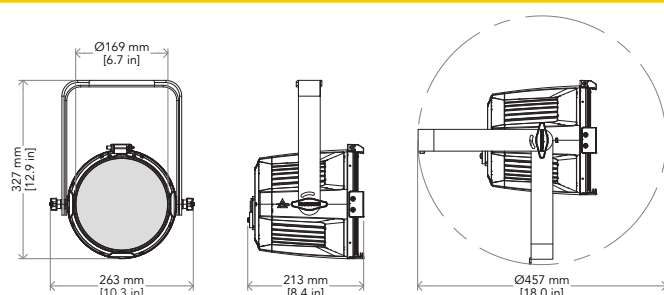

## CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573  
Certified to CSA STD: C22.2 NO. 166

Visit our website  
for specifications and  
tech documentations

