

Photometric Test Report



ECLPANELTWC

740W Tunable White and colourful LED soft light
with pixels and lighting effects
(driven @ 430W)

CONTENTS

Table of contents	2
Testing process	4
Color preset Full on	
Filter HD	5
Filter MD	8
Filter LD	11
Filter INT	14
Color preset Red	
Filter HD	17
Filter MD	20
Filter LD	23
Filter INT	26
Color preset Green	
Filter HD	29
Filter MD	32
Filter LD	35
Filter INT	38
Color preset Blue	
Filter HD	41
Filter MD	44
Filter LD	47
Filter INT	50
Color preset White	
Filter HD	53
Filter MD	56
Filter LD	59
Filter INT	62
Color temperature 2800K	
Filter HD	65
Filter MD	70
Filter LD	75
Filter INT	80

Color temperature 3200K

Filter HD	85
Filter MD	90
Filter LD	95
Filter INT	100

Color temperature 4000K

Filter HD	105
Filter MD	110
Filter LD	115
Filter INT	120

Color temperature 5600K

Filter HD	125
Filter MD	130
Filter LD	135
Filter INT	140

Color temperature 6000K

Filter HD	145
Filter MD	150
Filter LD	155
Filter INT	160

TESTING PROCESS

Prolights has its own optical testing laboratory in order to provide accurate photometric reports for its lighting products. The testing laboratory contains certain variety of precise lighting measurement systems that ensure an optimal reading of all the characteristic parameters of the lighting devices. All measurements are made at a controlled room temperature of 20°C without any external light sources. This photometric report is obtained through the data measured by a high precision measurement system and analyzed by a dedicate software.

Prolights measurement instrument

Prolights measurement instrument is a complete measurement system for any light source. It's equipped with two-axis goniometer, that enables to measure the full 3D distribution field of the light source. This instrument measures the light intensity, the beam angle and the most significative colors parameters, like color temperature, spectral distribution, CRI, CQS, TM-30 with a very high accuracy rate.

Please Note: All measurements are made with light source at operating temperature. Before starting the measurement, the instrument analyzes the process of the light source during the heating phase. The measuring process of all the parameters begins only when the light emission is stable, that is with a variation of less than 0.5% in a 15 minutes time frame.

Prolights measurement software

The software provides user friendly interface for the operator who does the measurements, and it also analyzes and processes all the collected data by the instrument. With this software it is possible to see the measured data in real-time and it is possible to examine all the measured data and graphics afterwards as well. All information is collected in a specific Prolights template, and the software creates also IES and LDT files, which are widely used to transfer the photometric data, and to develop lighting system.

Additionally, the fixtures are rechecked using various hand-held instruments like Sekonic C-700 and Gossen Mavospec Base, this is done to ensure, that the data in the photometric report are as accurate as possible.



Total lumen output:

22039 lm

Peak candela output:

7611 cd

PRODUCT NAME:

ECLPANEL TWC

MEASUREMENT CONDITIONS:

Beam angle:

Filter HD

Target:


Full On

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:51:33

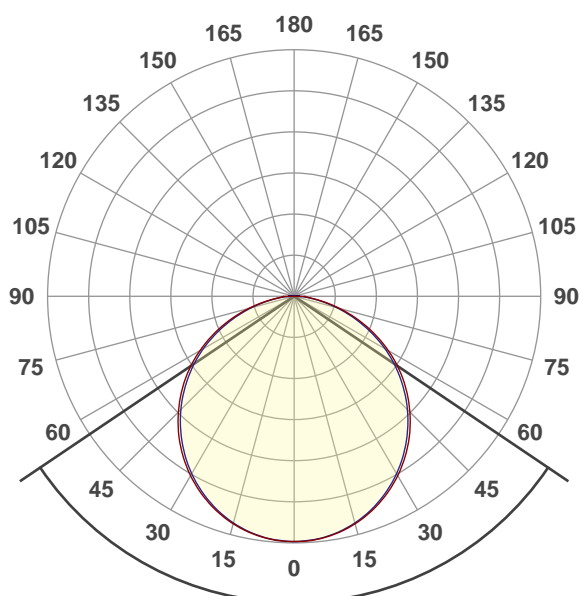


Beam angle 50%: 112°

Field angle 10%: 161,8°


Cut off angle 2.5%: 177,1°

Spectra

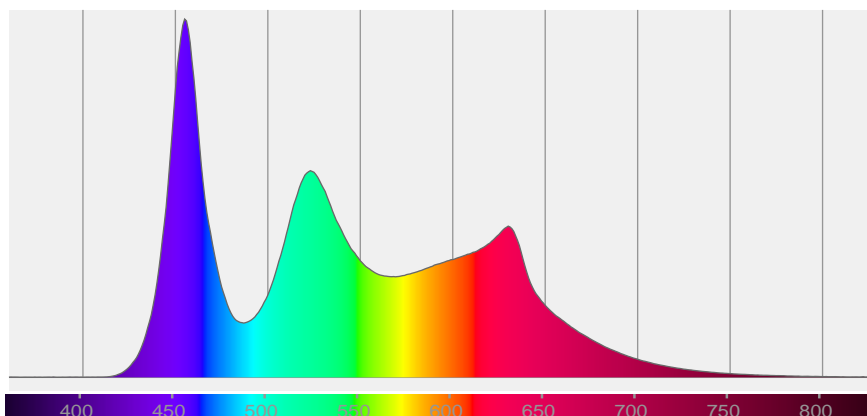

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
112°	161,8°	177,1°	77,2%	52,6%

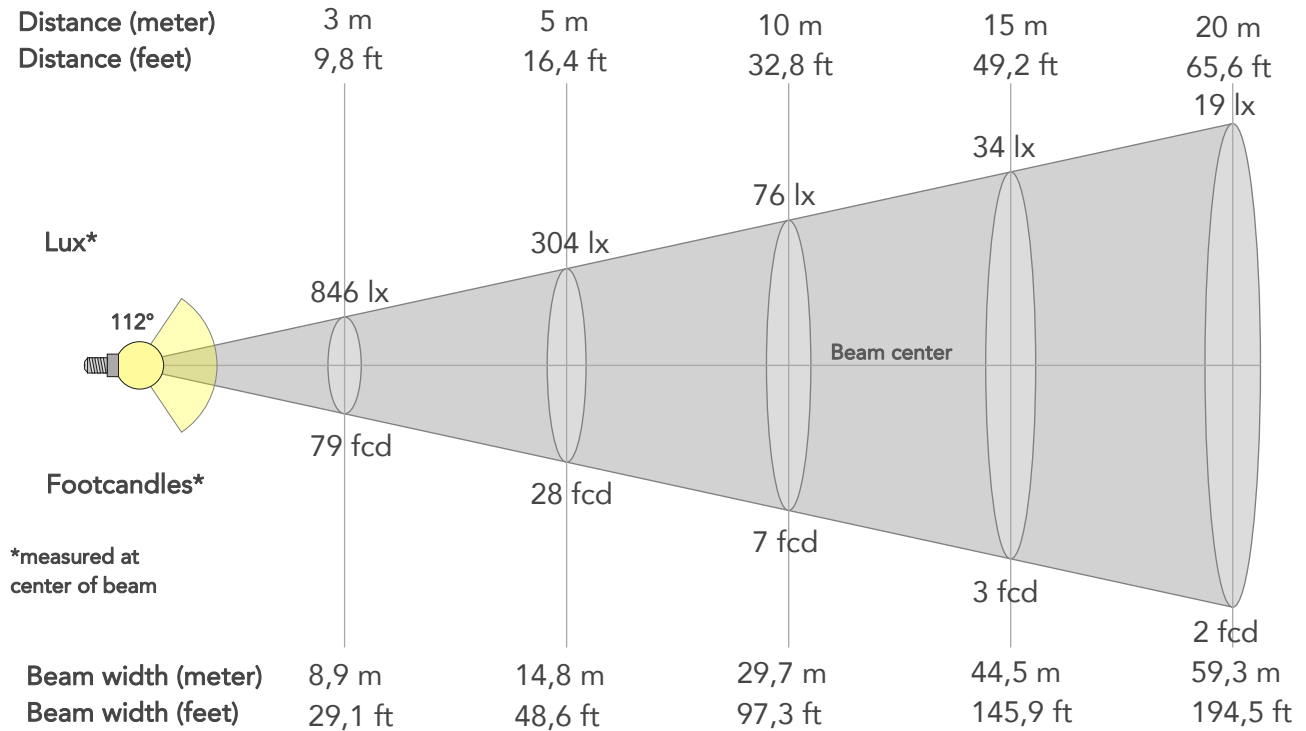

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	7611lx	1903lx	846lx	476lx	304lx	135lx	76lx	34lx	19lx	12lx	8lx	5lx	3lx
Footcand.	707fcd	177fcd	79fcd	44fcd	28fcd	13fcd	7fcd	3fcd	2fcd	1fcd	1fcd	0fcd	0fcd
Beam wid.	3m	5,9m	8,9m	11,9m	14,8m	22,2m	29,7m	44,5m	59,3m	74,1m	89m	118,6m	148,3m
Beam wid.	9,8ft	19,6ft	29,1ft	38,8ft	48,6ft	72,9ft	97,3ft	145,9ft	194,5ft	243,1ft	291,8ft	389ft	486,3ft


LINEAR DISTRIBUTION DIAGRAM

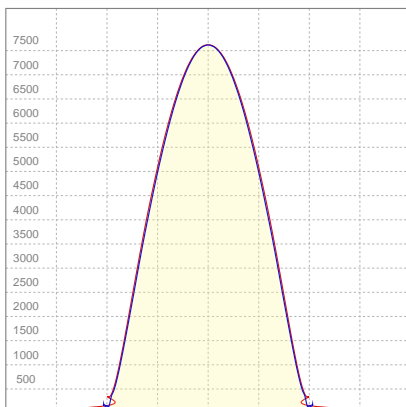

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
224V	1,66A	352,5W	63lm/W
Power Fc			
0,97			

ISO CANDELA DIAGRAM

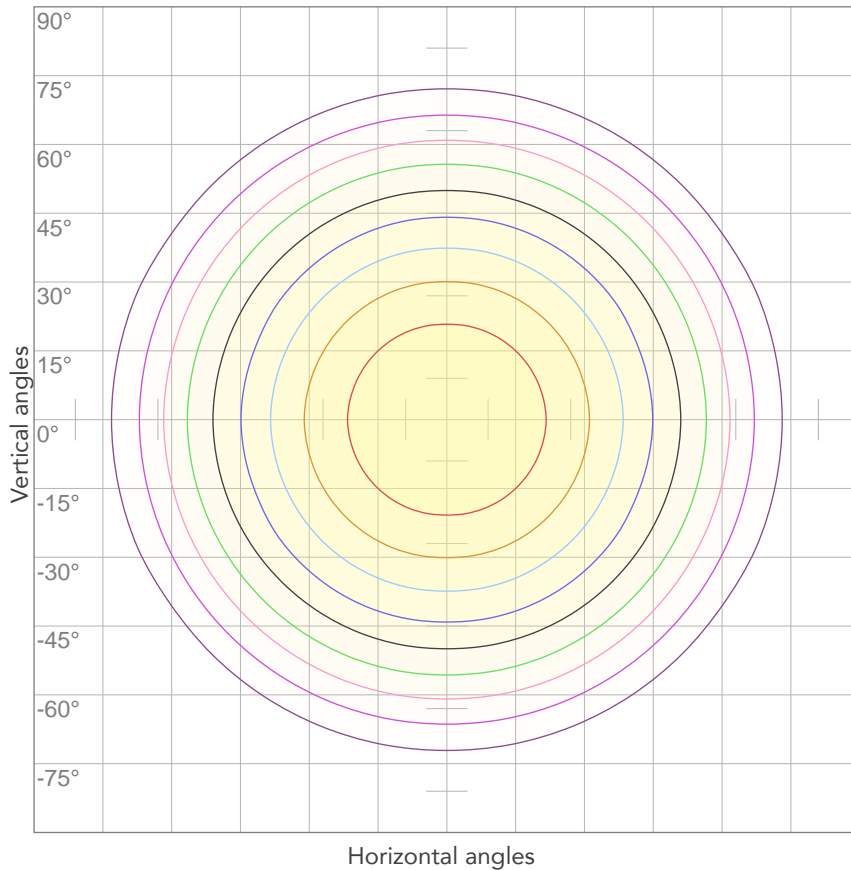


10%	761 cd
20%	1522 cd
30%	2283 cd
40%	3044 cd
50%	3806 cd
60%	4567 cd
70%	5328 cd
80%	6089 cd

Conditions:

Number of c-planes: 4

Candela at center: 7611 cd

ISO LUX DIAGRAM

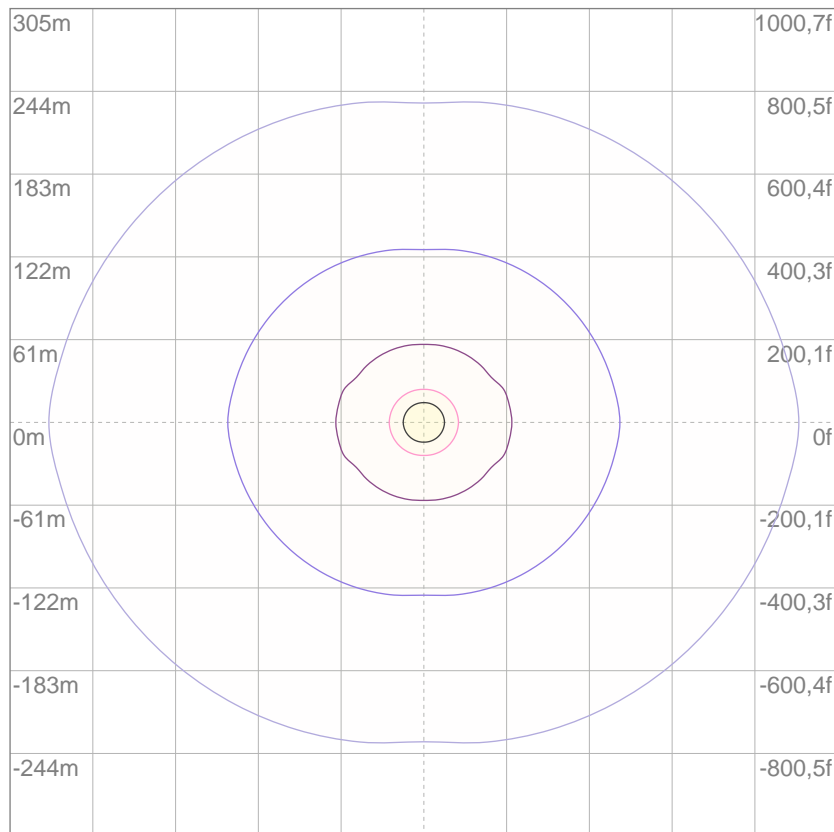

3%	2,28 lx
5%	3,81 lx
10%	7,61 lx
30%	22,8 lx
50%	38,1 lx

Conditions:

Number of c-planes: 4

Lux at center: 76,1 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

26443 lm

Peak candela output:

10113 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter MD

Target:


Full On

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:05:31

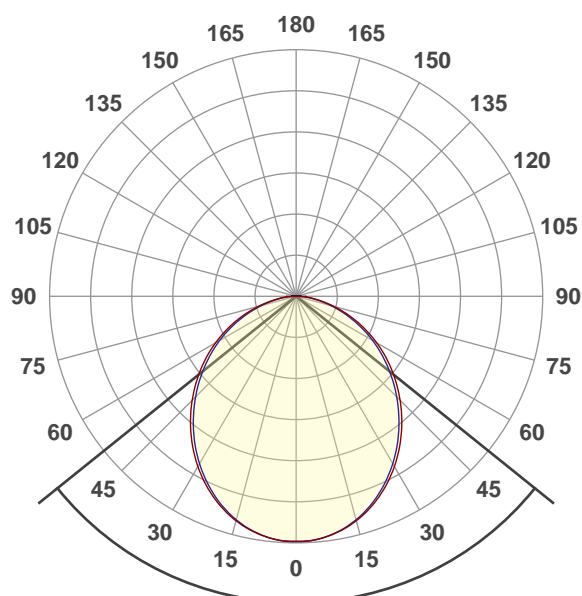


Beam angle 50%: 102,4°

Field angle 10%: 158,7°


Cut off angle 2.5%: 175,5°

Spectra

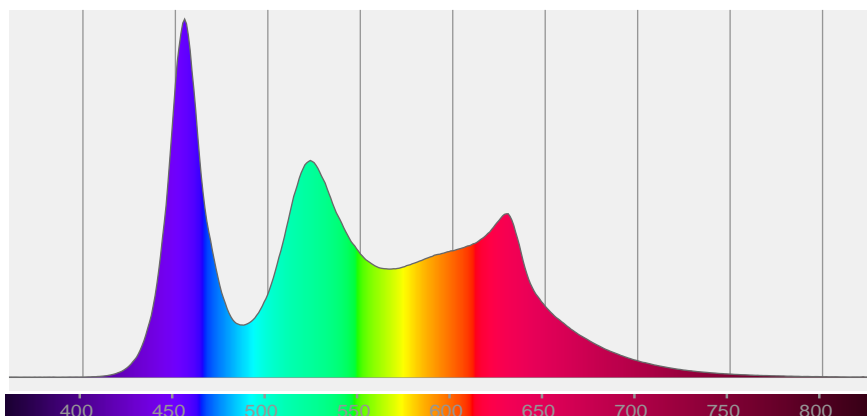

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,4°	158,7°	175,5°	78,9%	55,2%

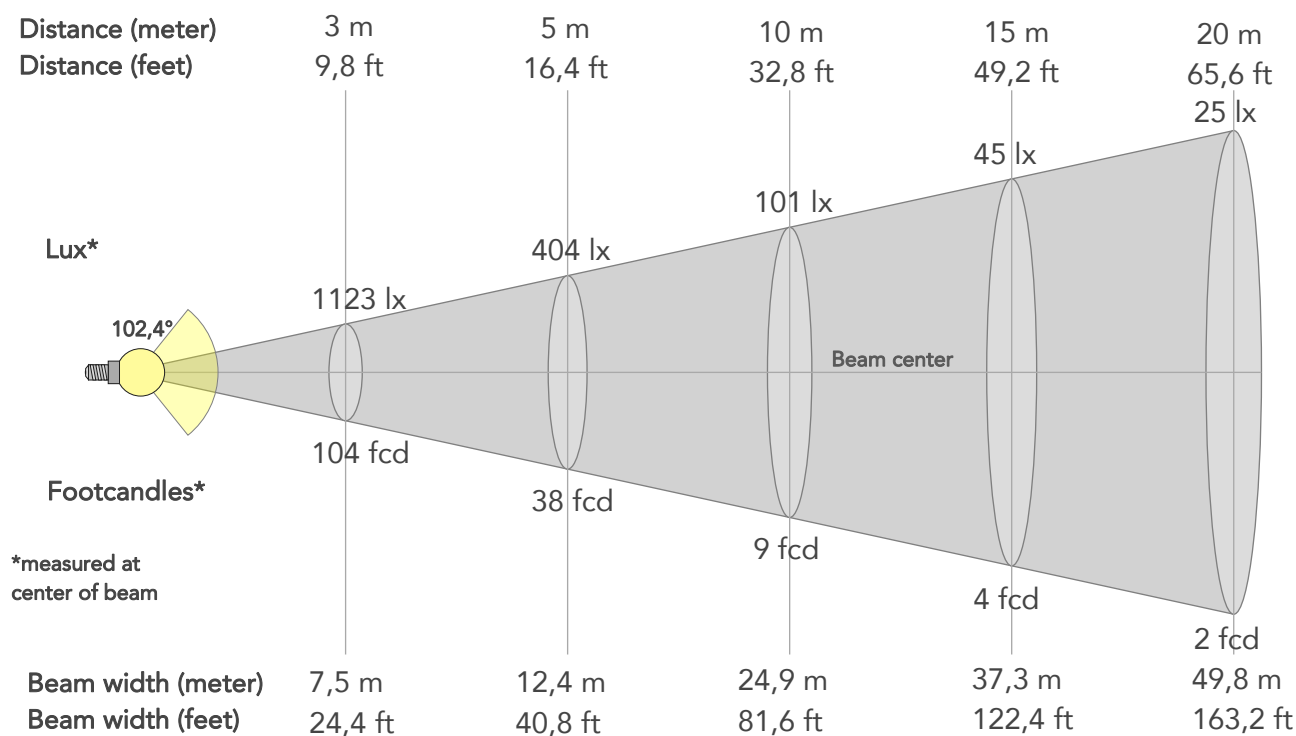

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	10108lx	2527lx	1123lx	632lx	404lx	180lx	101lx	45lx	25lx	16lx	11lx	6lx	4lx
Footcand.	939fcd	235fcd	104fcd	59fcd	38fcd	17fcd	9fcd	4fcd	2fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,5m	10m	12,4m	18,7m	24,9m	37,3m	49,8m	62,2m	74,6m	99,5m	124,4m
Beam wid.	8,2ft	16,4ft	24,4ft	32,6ft	40,8ft	61,2ft	81,6ft	122,4ft	163,2ft	204ft	244,8ft	326,4ft	408ft


LINEAR DISTRIBUTION DIAGRAM

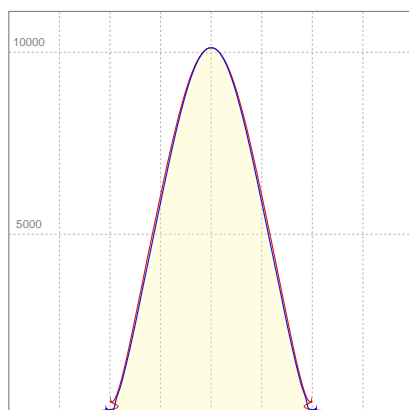

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
223V	1,67A	353,3W	75lm/W
Power Fc			
0,97			

ISO CANDELA DIAGRAM

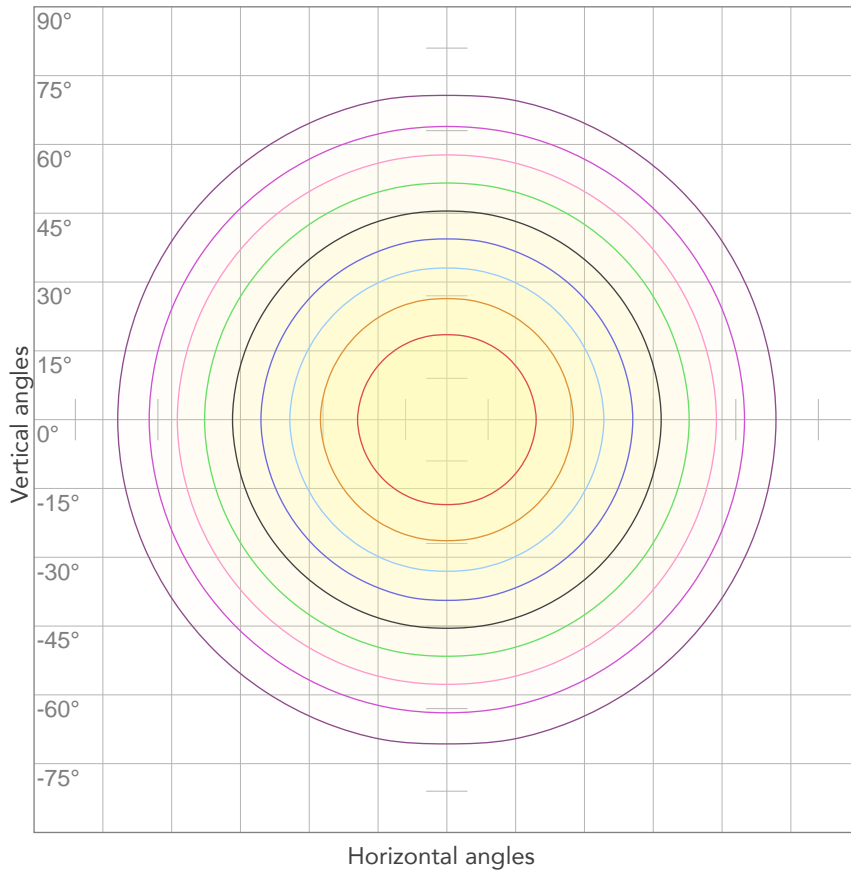


10%	1011 cd
20%	2022 cd
30%	3032 cd
40%	4043 cd
50%	5054 cd
60%	6065 cd
70%	7076 cd
80%	8087 cd

Conditions:

Number of c-planes: 4

Candela at center: 10108 cd

ISO LUX DIAGRAM

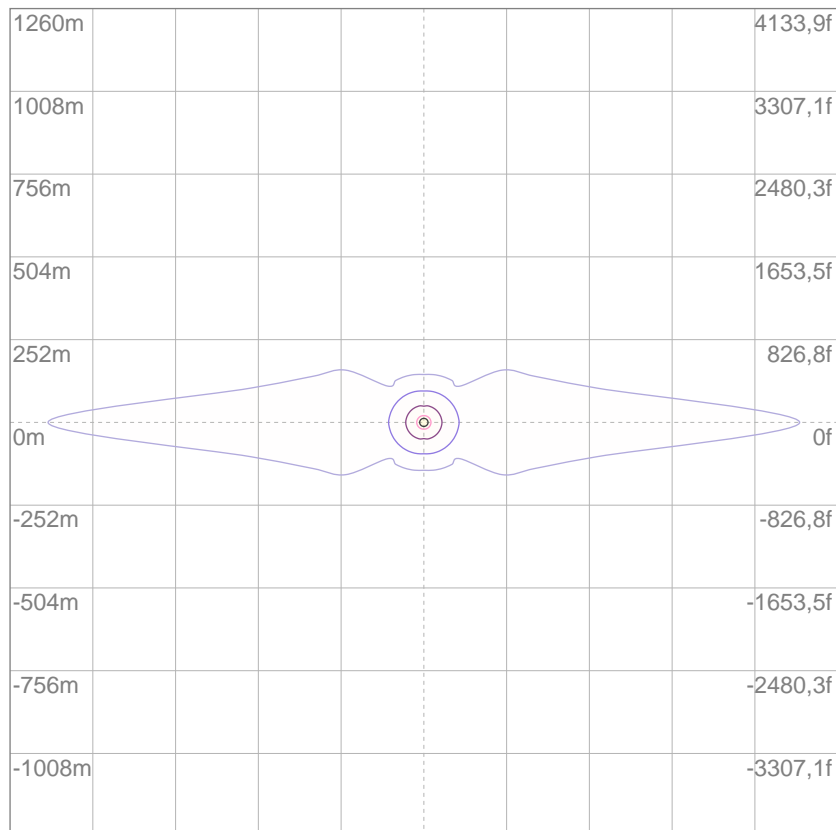

3%	3,03 lx
5%	5,05 lx
10%	10,1 lx
30%	30,3 lx
50%	50,5 lx

Conditions:

Number of c-planes: 4

Lux at center: 101 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

25860 lm

Peak candela output:

9831 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter LD

Target:


Full On

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:09:30

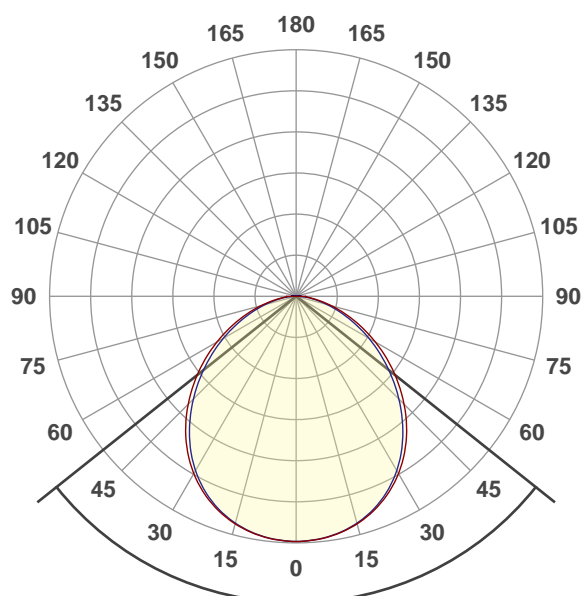


Beam angle 50%: 103°

Field angle 10%: 157°


Cut off angle 2.5%: 175,4°

Spectra

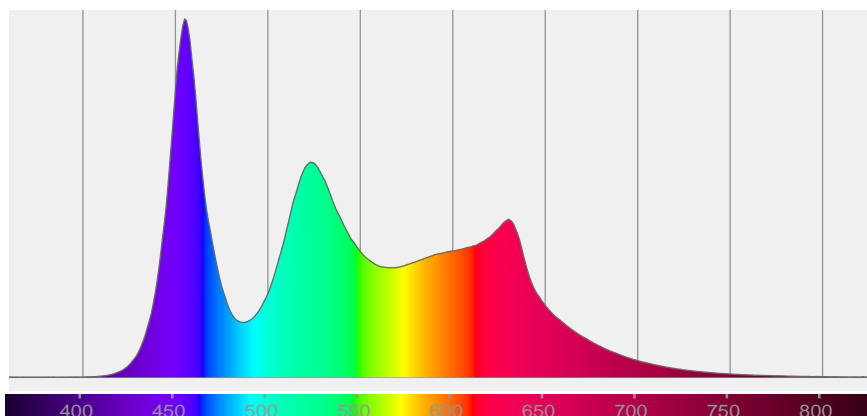

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
103°	157°	175,4°	80,2%	56,6%

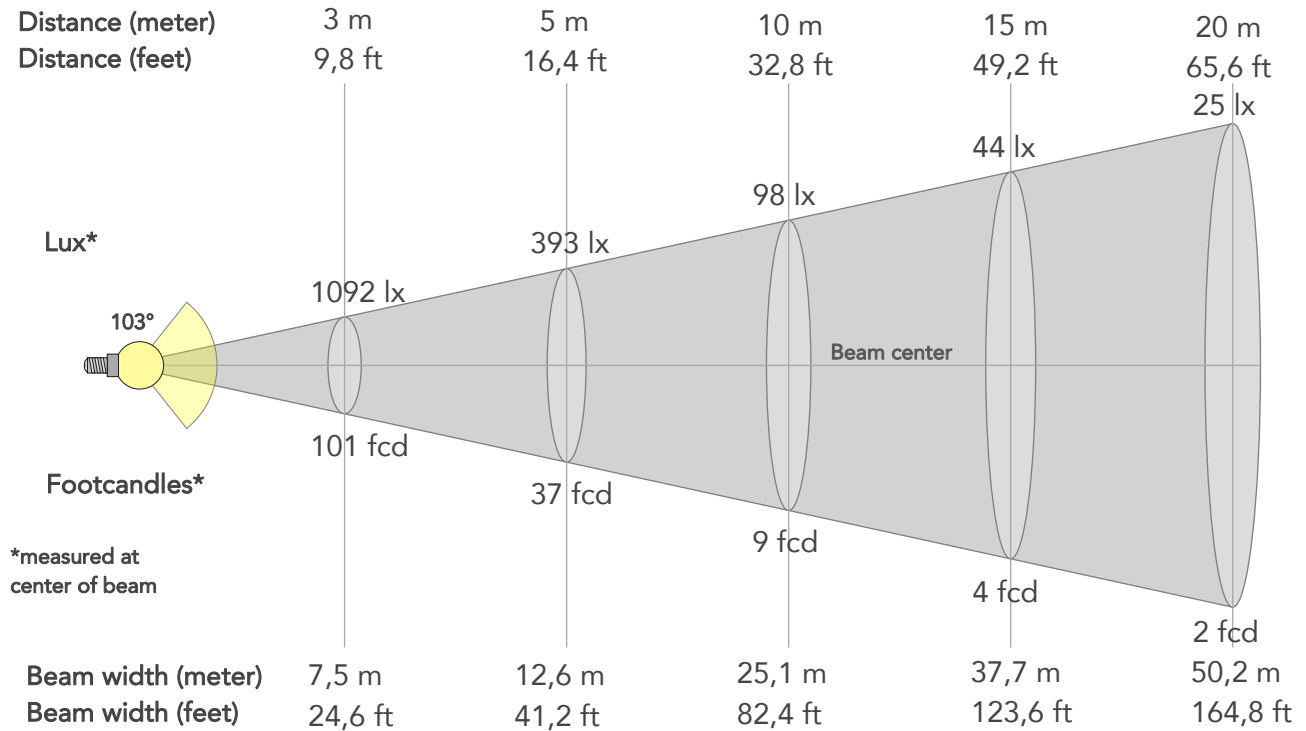

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	9828lx	2457lx	1092lx	614lx	393lx	175lx	98lx	44lx	25lx	16lx	11lx	6lx	4lx
Footcand.	913fcd	228fcd	101fcd	57fcd	37fcd	16fcd	9fcd	4fcd	2fcd	1fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,5m	10m	12,6m	18,8m	25,1m	37,7m	50,2m	62,8m	75,4m	100,5m	125,6m
Beam wid.	8,3ft	16,6ft	24,6ft	32,9ft	41,2ft	61,8ft	82,4ft	123,6ft	164,8ft	206ft	247,2ft	329,6ft	412ft


LINEAR DISTRIBUTION DIAGRAM

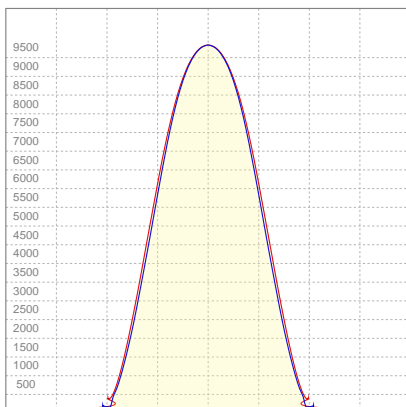

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
224V	1,66A	352,2W	73lm/W
Power Fc			
0,97			

ISO CANDELA DIAGRAM

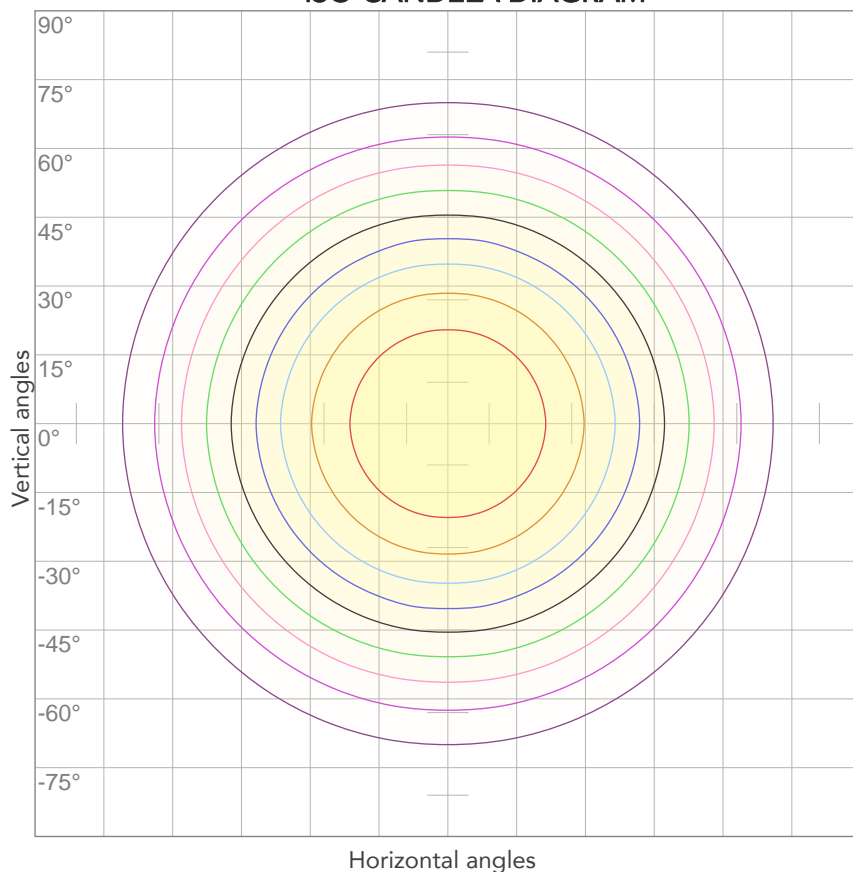


10%	983 cd
20%	1966 cd
30%	2948 cd
40%	3931 cd
50%	4914 cd
60%	5897 cd
70%	6880 cd
80%	7862 cd

Conditions:

Number of c-planes: 4

Candela at center: 9828 cd

ISO LUX DIAGRAM

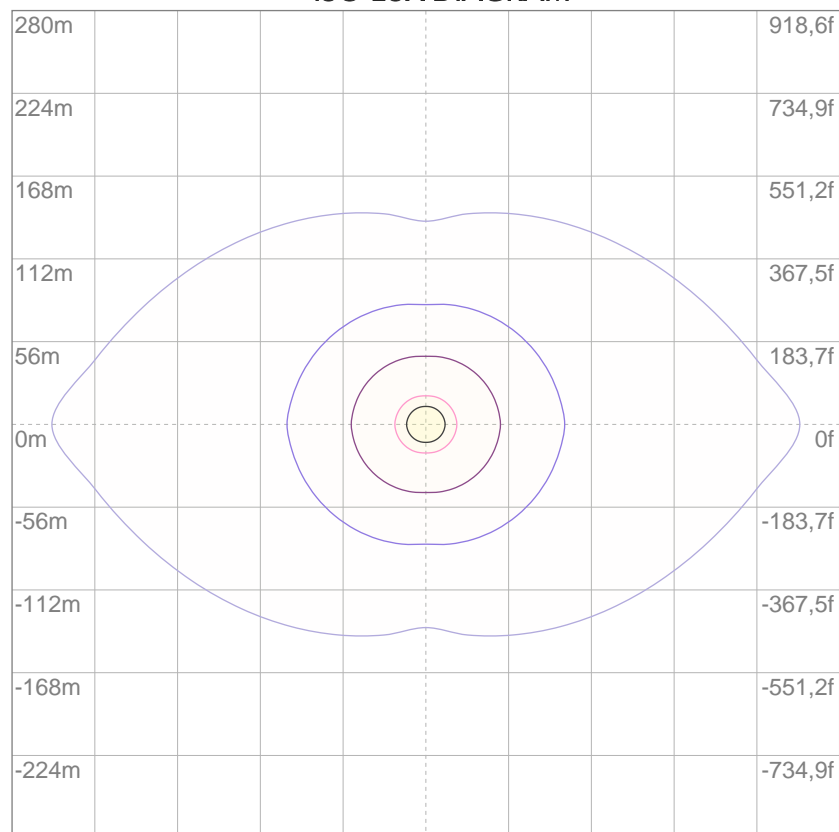

3%	2,95 lx
5%	4,91 lx
10%	9,83 lx
30%	29,5 lx
50%	49,1 lx

Conditions:

Number of c-planes: 4

Lux at center: 98,3 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

28551 lm

Peak candela output:

17139 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter Int.

Target:


Full On

Operator:

Paolo Carvone

Date and time:

14/08/2020 10:45:56

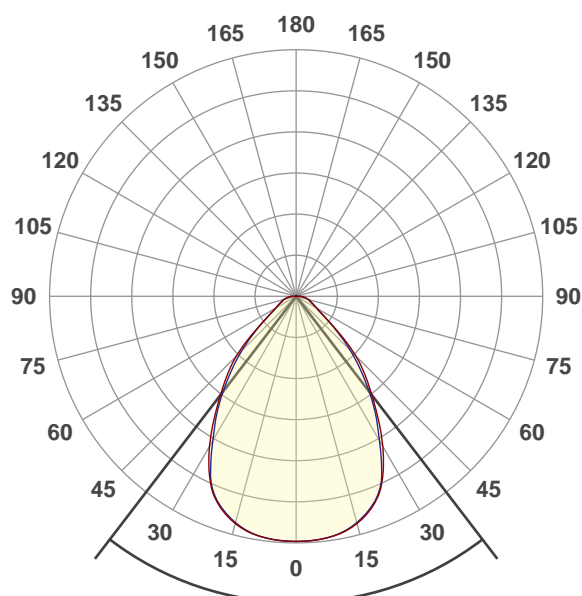


Beam angle 50%: 74,9°

Field angle 10%: 118,7°


Cut off angle 2.5%: 171,1°

Spectra

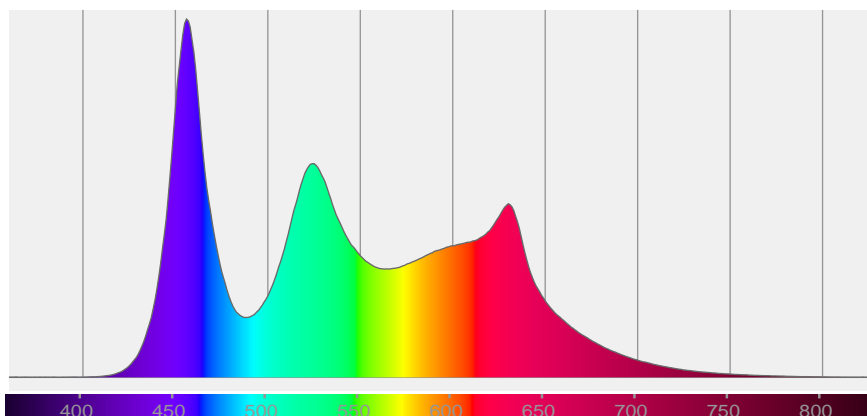

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
74,9°	118,7°	171,1°	88,0%	73,9%

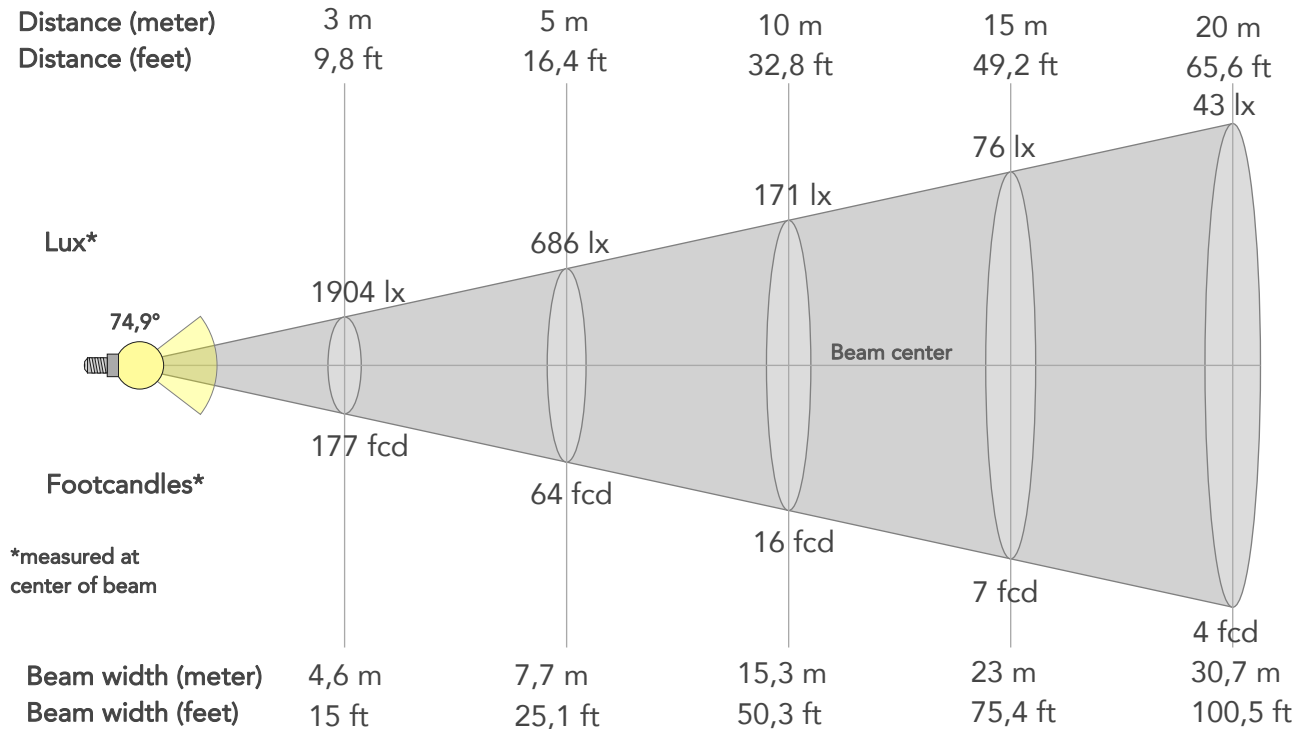

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	17138lx	4284lx	1904lx	1071lx	686lx	305lx	171lx	76lx	43lx	27lx	19lx	11lx	7lx
Footcand.	1592fcd	398fcd	177fcd	100fcd	64fcd	28fcd	16fcd	7fcd	4fcd	3fcd	2fcd	1fcd	1fcd
Beam wid.	1,5m	3,1m	4,6m	6,1m	7,7m	11,5m	15,3m	23m	30,7m	38,3m	46m	61,3m	76,6m
Beam wid.	5,1ft	10,1ft	15ft	20,1ft	25,1ft	37,7ft	50,3ft	75,4ft	100,5ft	125,7ft	150,8ft	201,1ft	251,4ft


LINEAR DISTRIBUTION DIAGRAM

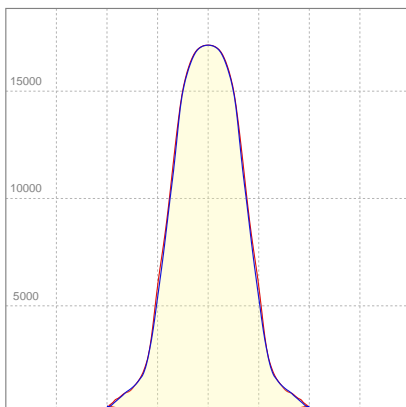

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
226V	2,02A	443,7W	64lm/W
Power FC			
0,97			

ISO CANDELA DIAGRAM

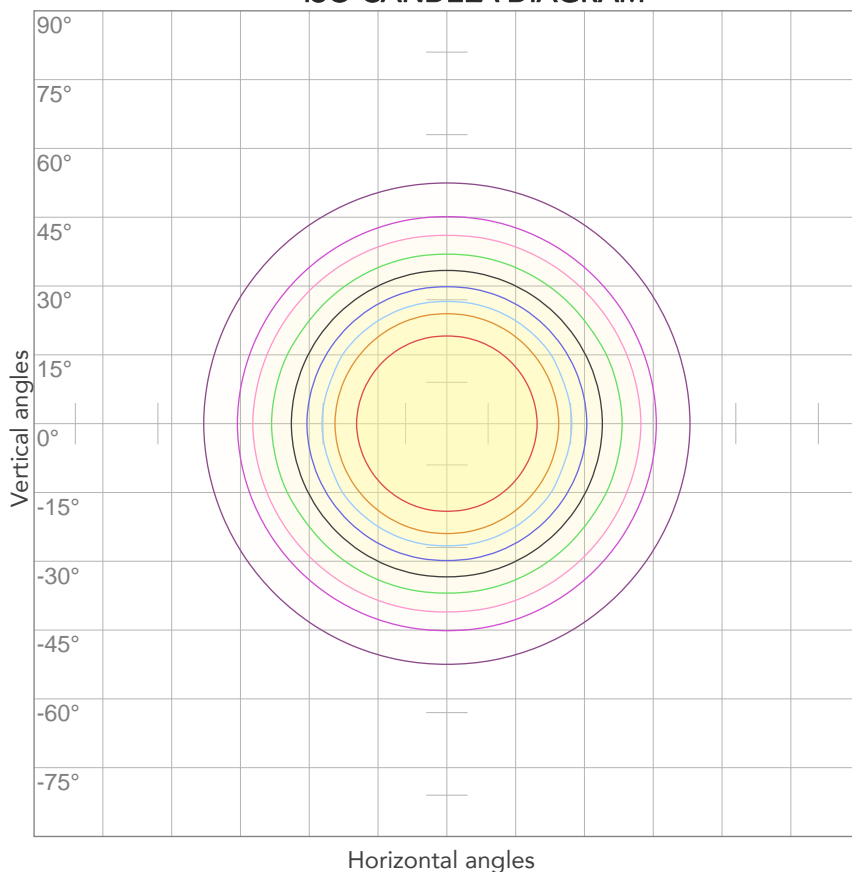


10%	1714 cd
20%	3428 cd
30%	5141 cd
40%	6855 cd
50%	8569 cd
60%	10283 cd
70%	11996 cd
80%	13710 cd

Conditions:

Number of c-planes: 4

Candela at center: 17138 cd

ISO LUX DIAGRAM

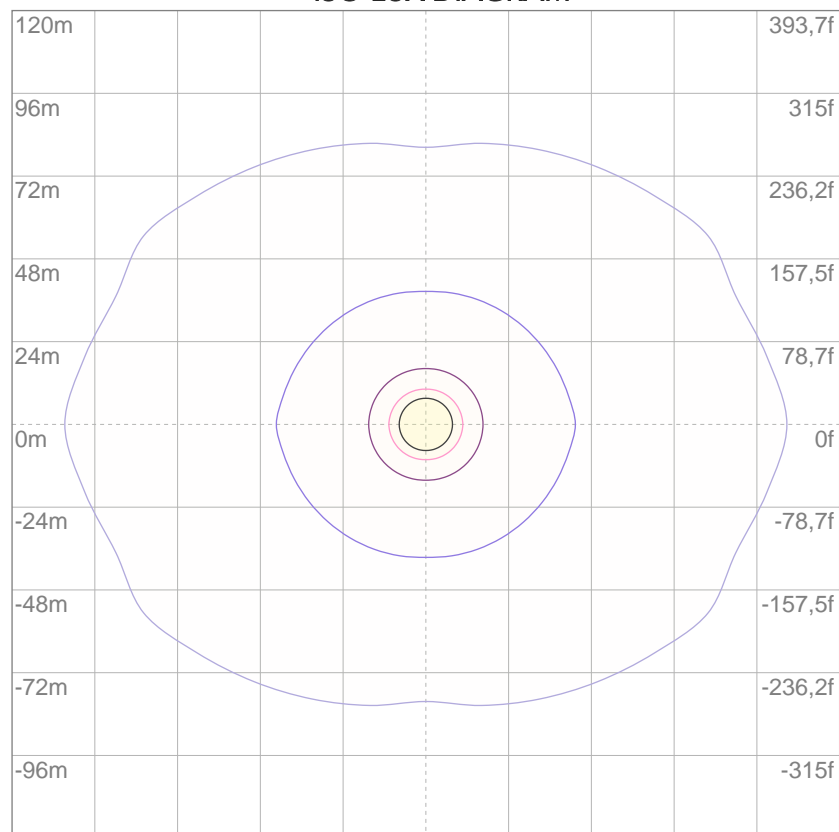

3%	5,14 lx
5%	8,57 lx
10%	17,1 lx
30%	51,4 lx
50%	85,7 lx

Conditions:

Number of c-planes: 4

Lux at center: 171 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

5631 lm

Peak candela output:

1919 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter HD

Target:


Red

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:53:22

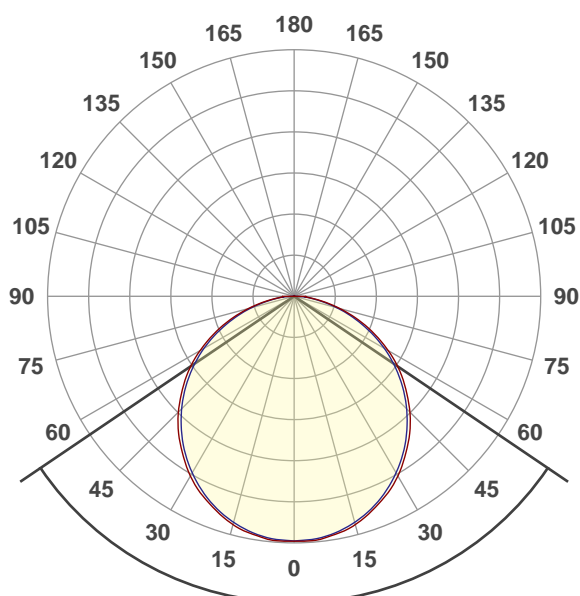


Beam angle 50%: 111,8°

Field angle 10%: 162°


Cut off angle 2.5%: 176,5°

Spectra

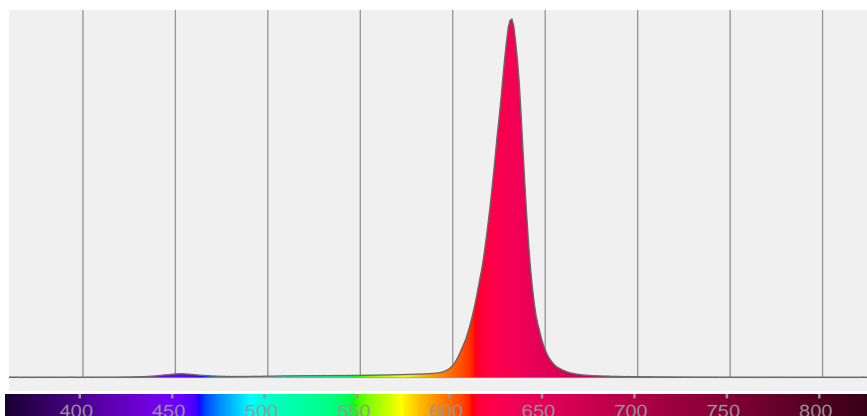

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
111,8°	162°	176,5°	76,0%	51,8%

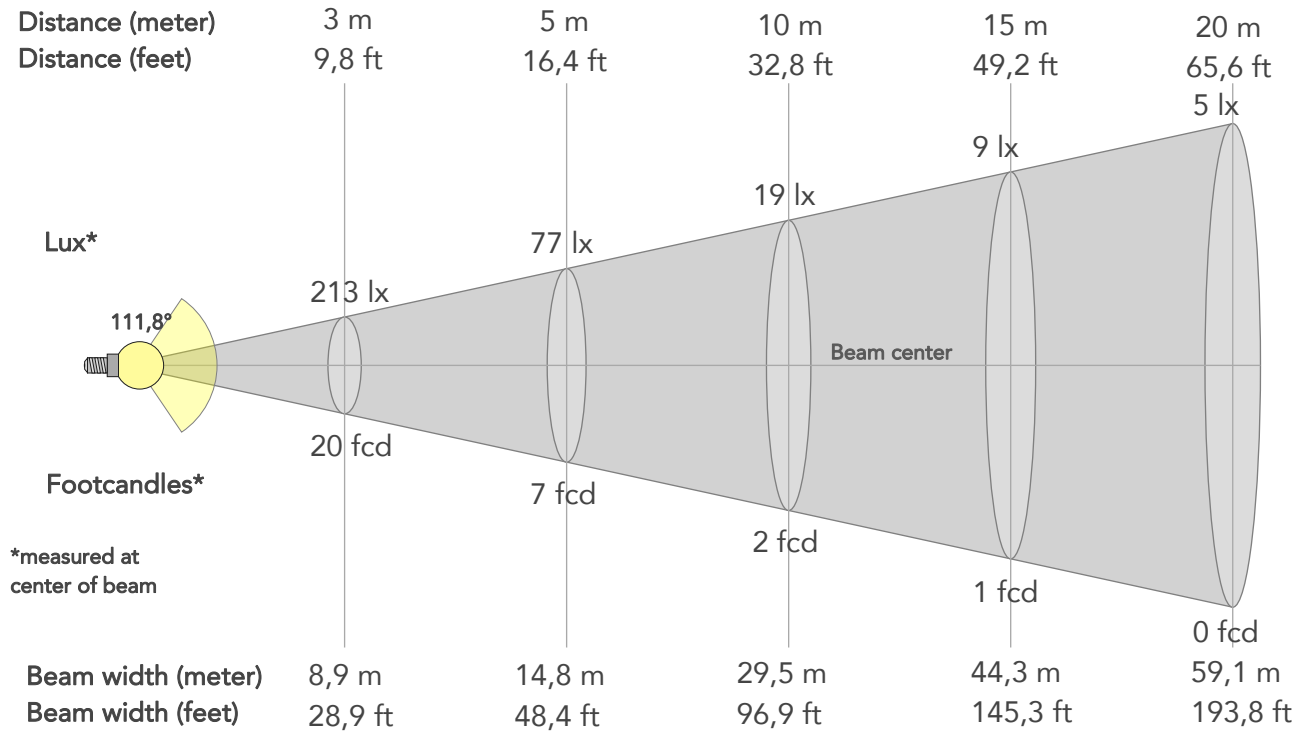

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	1916lx	479lx	213lx	120lx	77lx	34lx	19lx	9lx	5lx	3lx	2lx	1lx	1lx
Footcand.	178fcd	45fcd	20fcd	11fcd	7fcd	3fcd	2fcd	1fcd	0fcd	0fcd	0fcd	0fcd	0fcd
Beam wid.	3m	5,9m	8,9m	11,8m	14,8m	22,2m	29,5m	44,3m	59,1m	73,9m	88,6m	118,2m	147,7m
Beam wid.	9,7ft	19,5ft	28,9ft	38,7ft	48,4ft	72,7ft	96,9ft	145,3ft	193,8ft	242,2ft	290,7ft	387,6ft	484,5ft


LINEAR DISTRIBUTION DIAGRAM

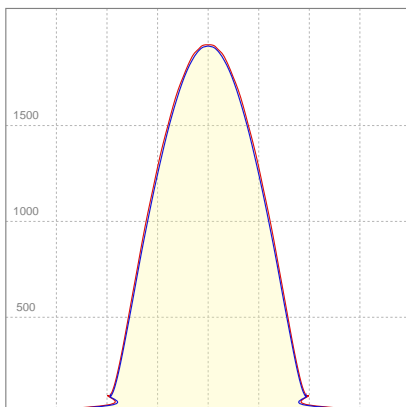

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	0,836A	159W	35lm/W

ISO CANDELA DIAGRAM

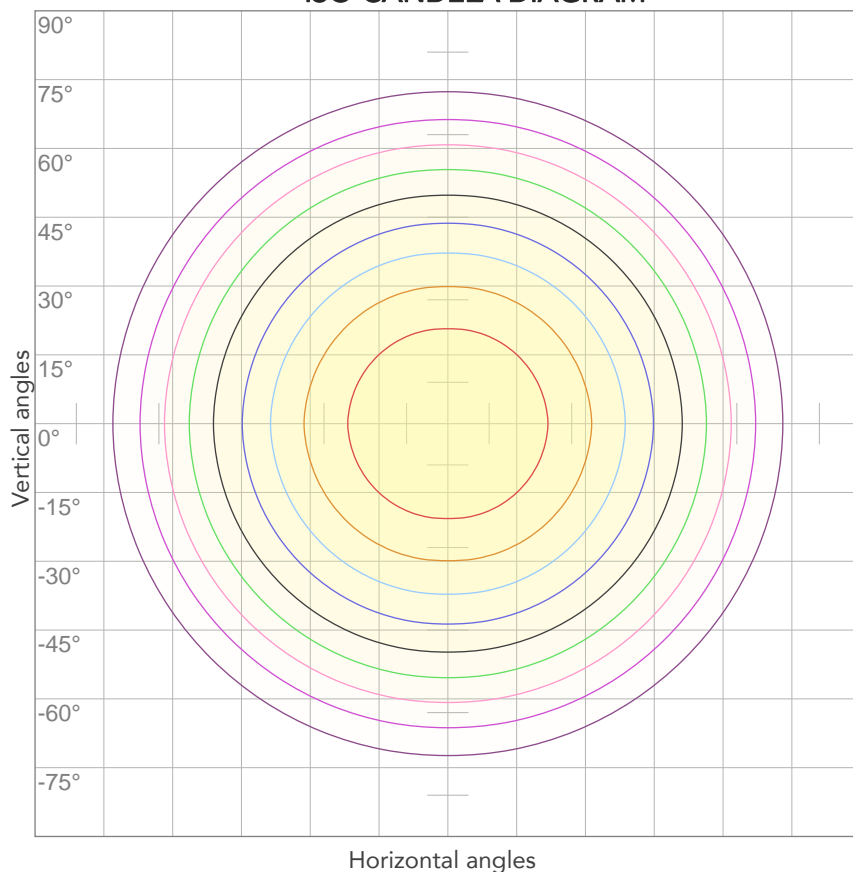


10%	192 cd
20%	383 cd
30%	575 cd
40%	766 cd
50%	958 cd
60%	1150 cd
70%	1341 cd
80%	1533 cd

Conditions:

Number of c-planes: 4

Candela at center: 1916 cd

ISO LUX DIAGRAM

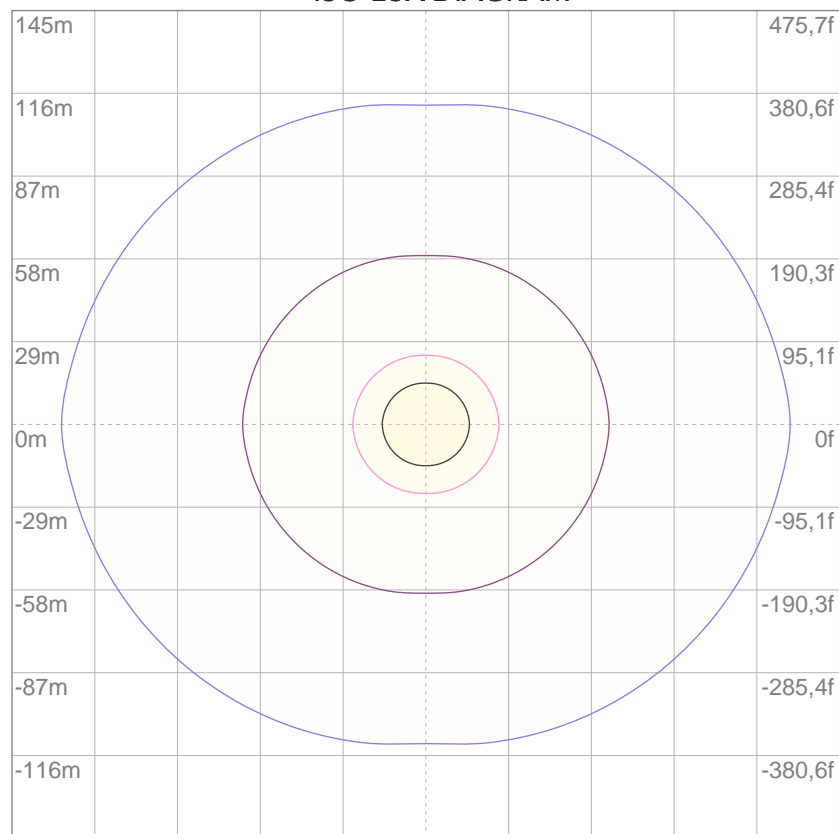

3%	0,575 lx
5%	0,958 lx
10%	1,92 lx
30%	5,75 lx
50%	9,58 lx

Conditions:

Number of c-planes: 4

Lux at center: 19,2 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

6738 lm

Peak candela output:

2539 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter MD

Target:


Red

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:17:16

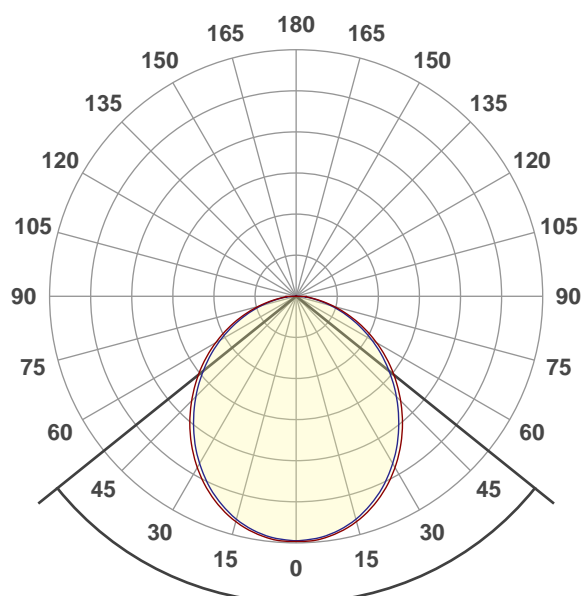


Beam angle 50%: 102,4°

Field angle 10%: 158,7°


Cut off angle 2.5%: 175,8°

Spectra

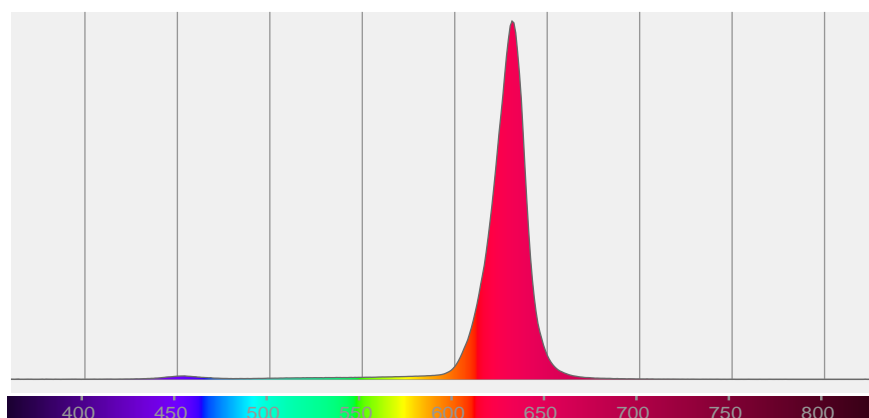

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,4°	158,7°	175,8°	77,8%	54,4%

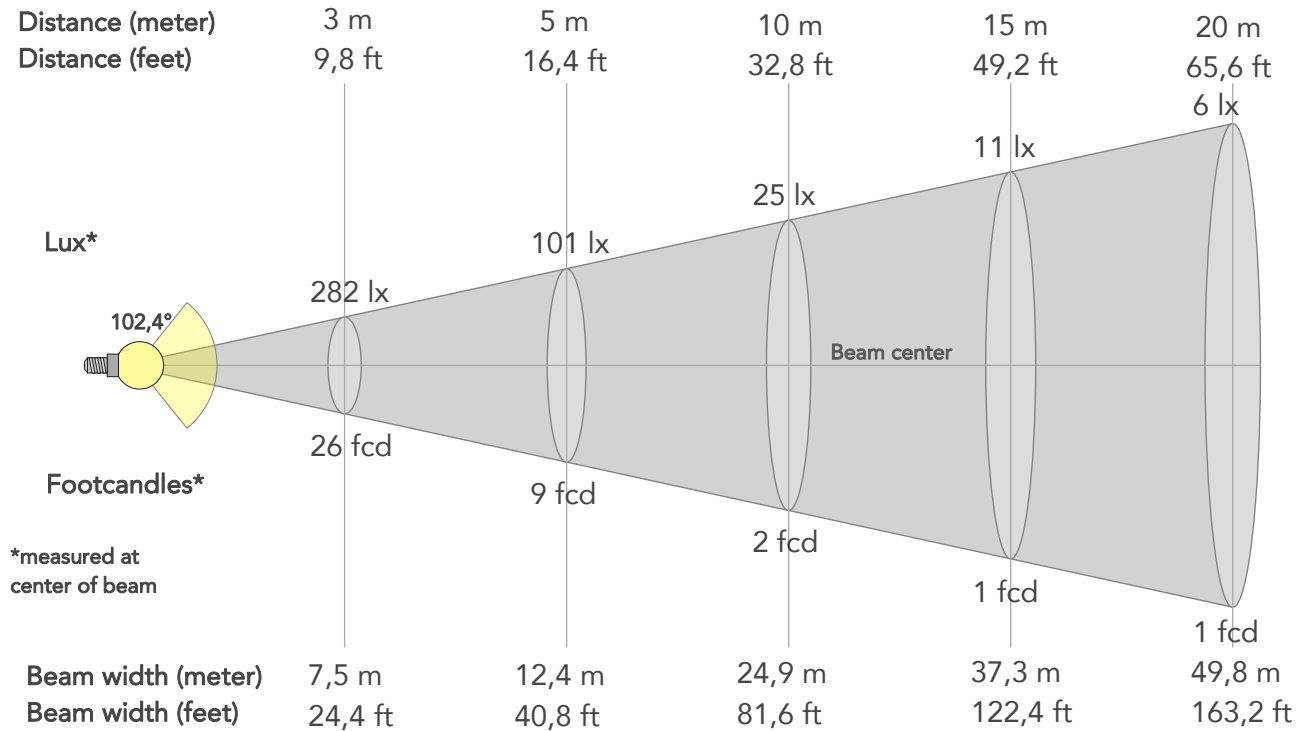

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	2534lx	634lx	282lx	158lx	101lx	45lx	25lx	11lx	6lx	4lx	3lx	2lx	1lx
Footcand.	235fcd	59fcd	26fcd	15fcd	9fcd	4fcd	2fcd	1fcd	1fcd	0fcd	0fcd	0fcd	0fcd
Beam wid.	2,5m	5m	7,5m	10m	12,4m	18,7m	24,9m	37,3m	49,8m	62,2m	74,6m	99,5m	124,4m
Beam wid.	8,2ft	16,4ft	24,4ft	32,6ft	40,8ft	61,2ft	81,6ft	122,4ft	163,2ft	204ft	244,8ft	326,5ft	408,1ft


LINEAR DISTRIBUTION DIAGRAM

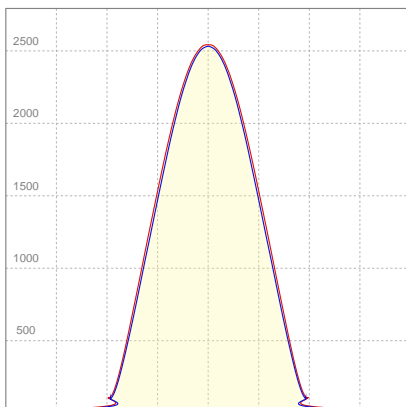

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	0,834A	158,8W	42lm/W

ISO CANDELA DIAGRAM

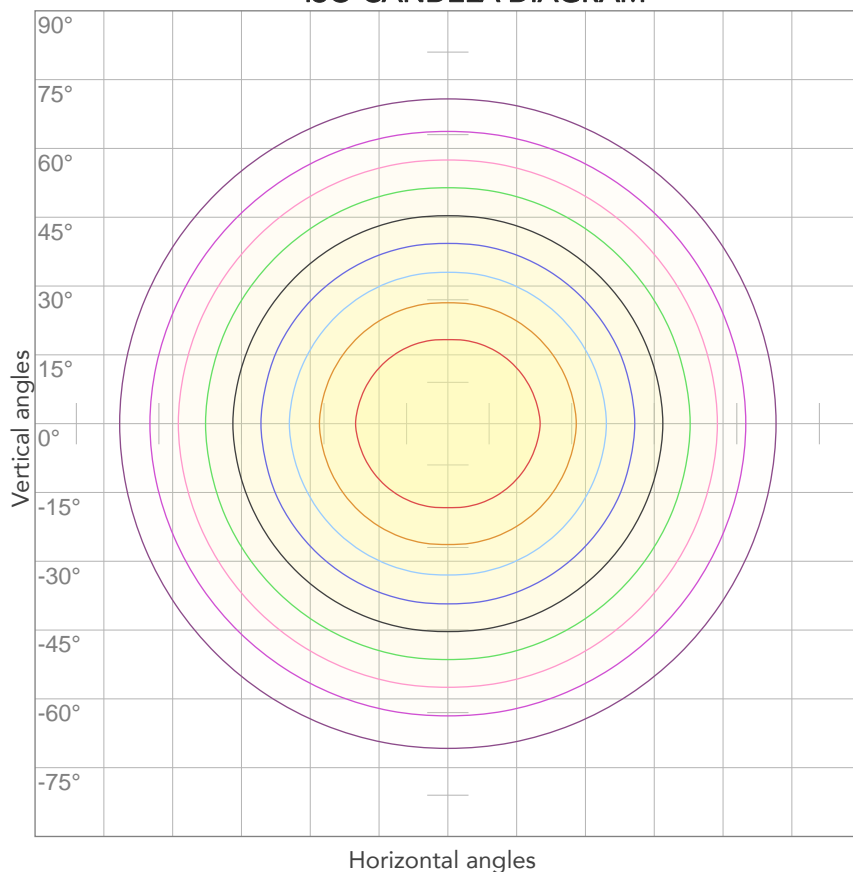


10%	253 cd
20%	507 cd
30%	760 cd
40%	1014 cd
50%	1267 cd
60%	1521 cd
70%	1774 cd
80%	2027 cd

Conditions:

Number of c-planes: 4

Candela at center: 2534 cd

ISO LUX DIAGRAM

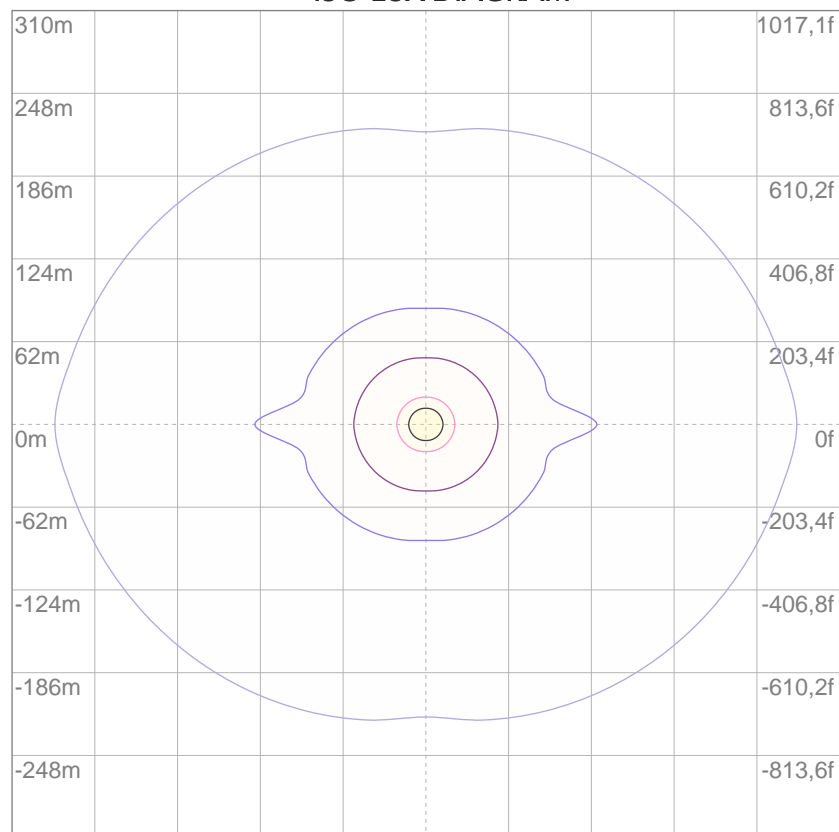

3%	0,760 lx
5%	1,27 lx
10%	2,53 lx
30%	7,60 lx
50%	12,7 lx

Conditions:

Number of c-planes: 4

Lux at center: 25,3 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

6443 lm

Peak candela output:

2392 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter LD

Target:


Red

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:11:18

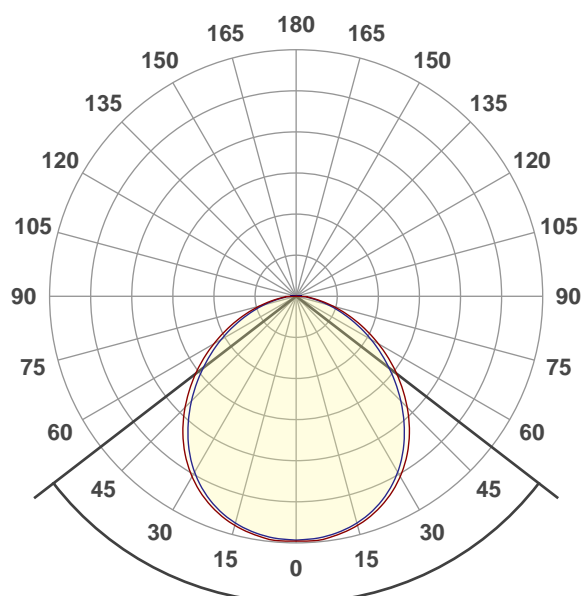


Beam angle 50%: 104,8°

Field angle 10%: 157,9°

Cut off angle 2.5%: 176,4°


Spectra

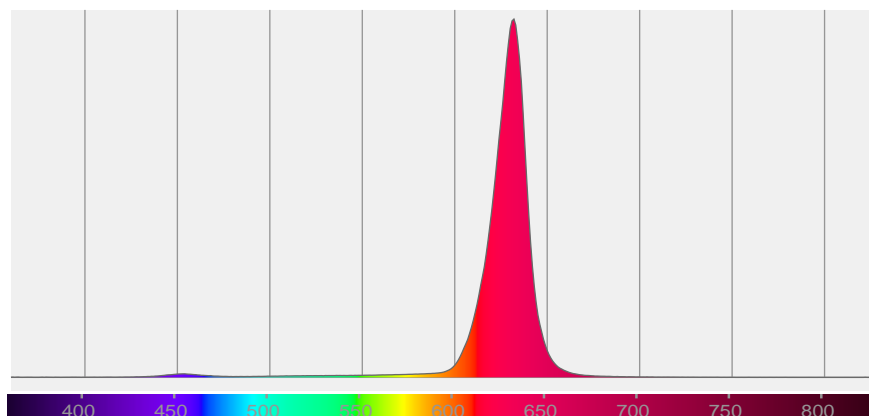

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
104,8°	157,9°	176,4°	79,7%	55,9%

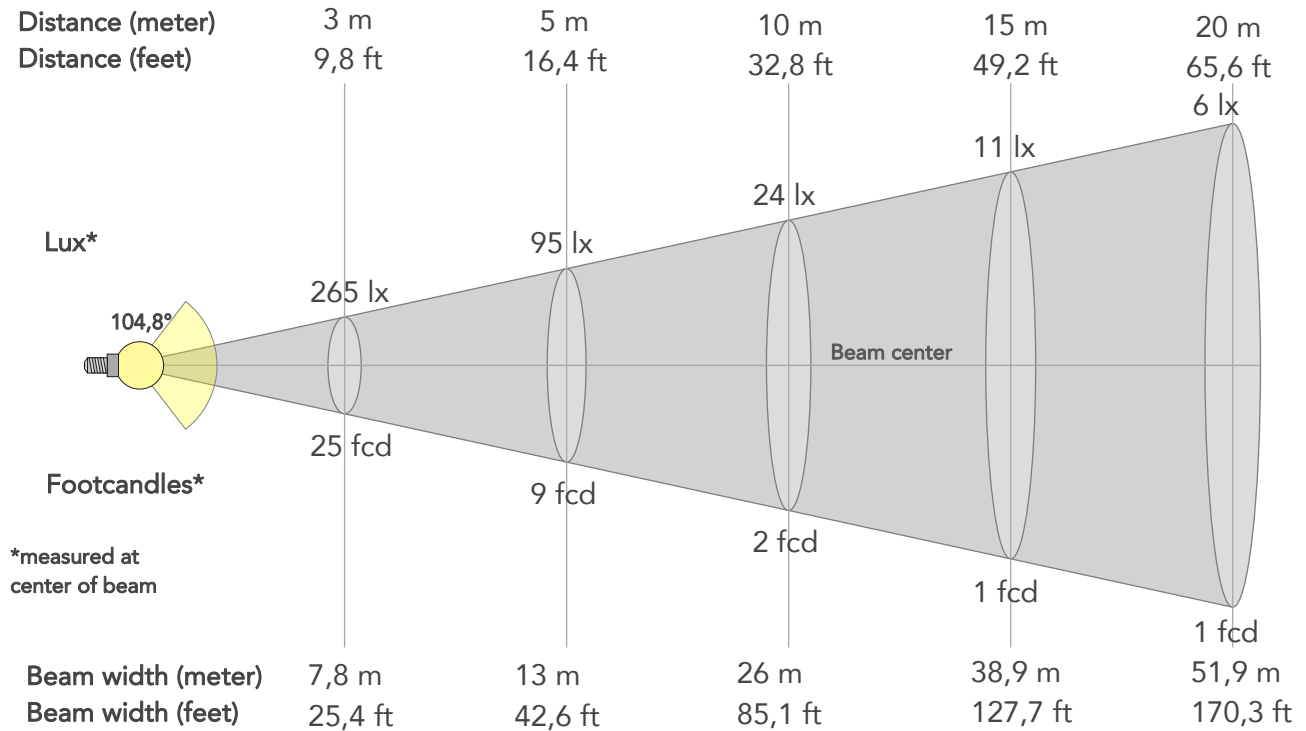

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	2385lx	596lx	265lx	149lx	95lx	42lx	24lx	11lx	6lx	4lx	3lx	1lx	1lx
Footcand.	222fcd	55fcd	25fcd	14fcd	9fcd	4fcd	2fcd	1fcd	1fcd	0fcd	0fcd	0fcd	0fcd
Beam wid.	2,6m	5,2m	7,8m	10,4m	13m	19,5m	26m	38,9m	51,9m	64,9m	77,9m	103,8m	129,8m
Beam wid.	8,6ft	17,1ft	25,4ft	34ft	42,6ft	63,9ft	85,1ft	127,7ft	170,3ft	212,9ft	255,4ft	340,6ft	425,7ft


LINEAR DISTRIBUTION DIAGRAM

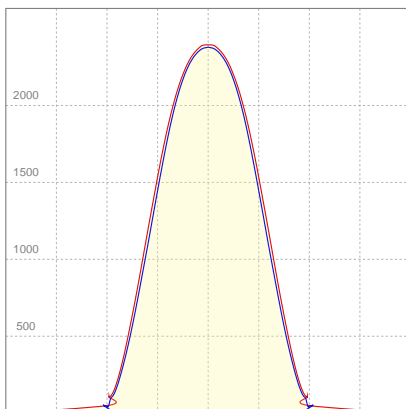

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	0,835A	159W	41lm/W

ISO CANDELA DIAGRAM

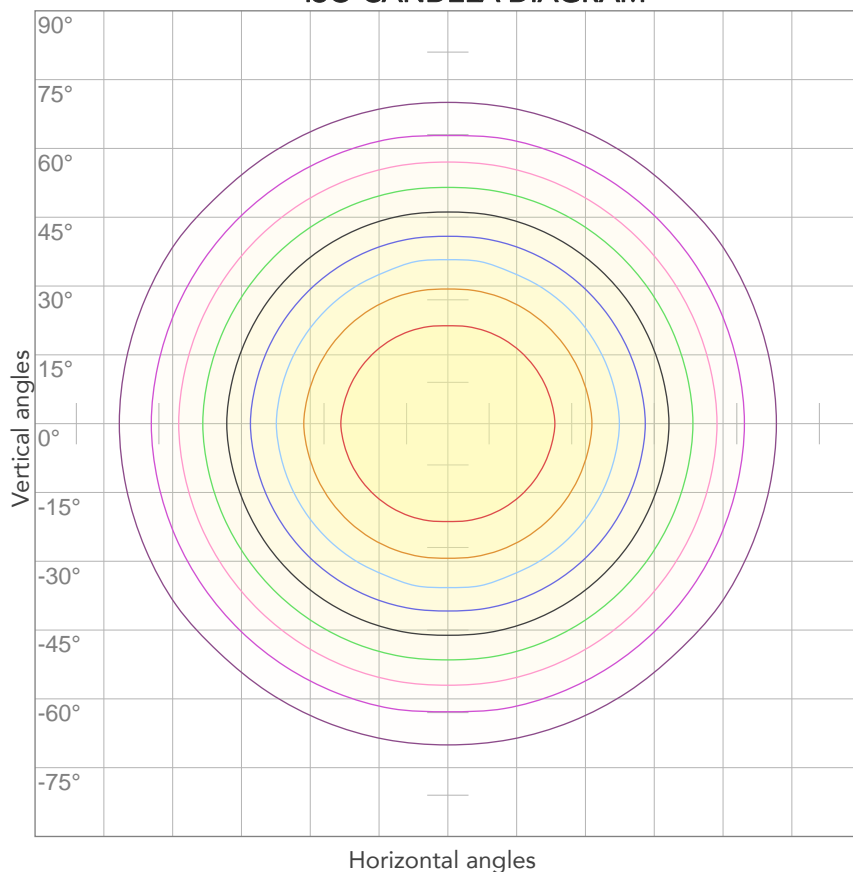


10%	238 cd
20%	477 cd
30%	715 cd
40%	954 cd
50%	1192 cd
60%	1431 cd
70%	1669 cd
80%	1908 cd

Conditions:

Number of c-planes: 4

Candela at center: 2385 cd

ISO LUX DIAGRAM

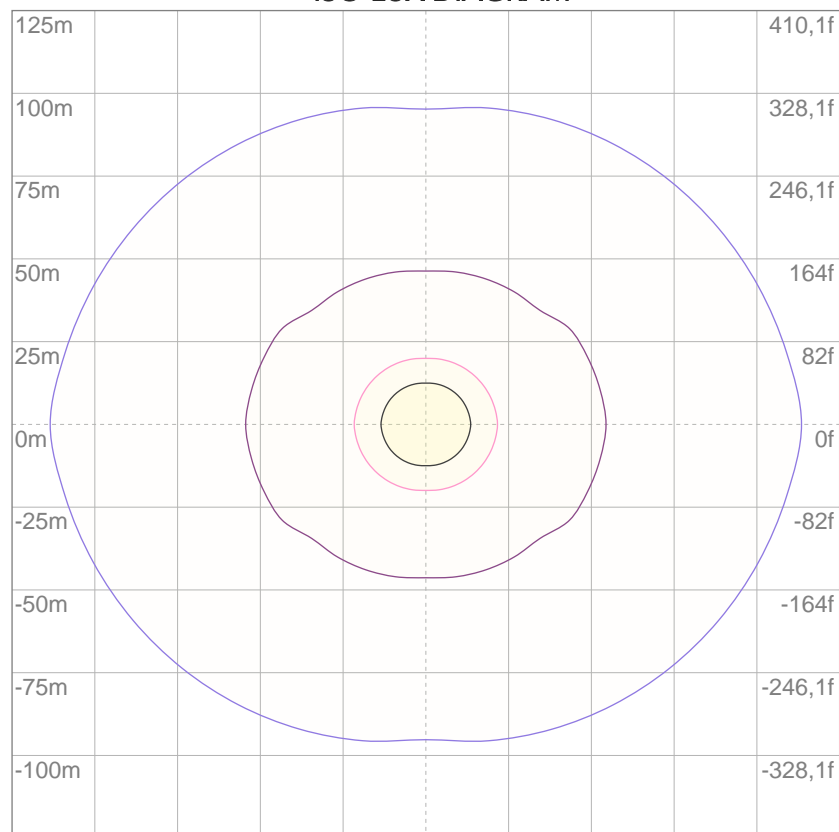

3%	0,715 lx
5%	1,19 lx
10%	2,38 lx
30%	7,15 lx
50%	11,9 lx

Conditions:

Number of c-planes: 4

Lux at center: 23,8 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

5865 lm

Peak candela output:

3768 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter Int.

Target:


Red

Operator:

Paolo Carvone

Date and time:

18/11/2020 10:39:02

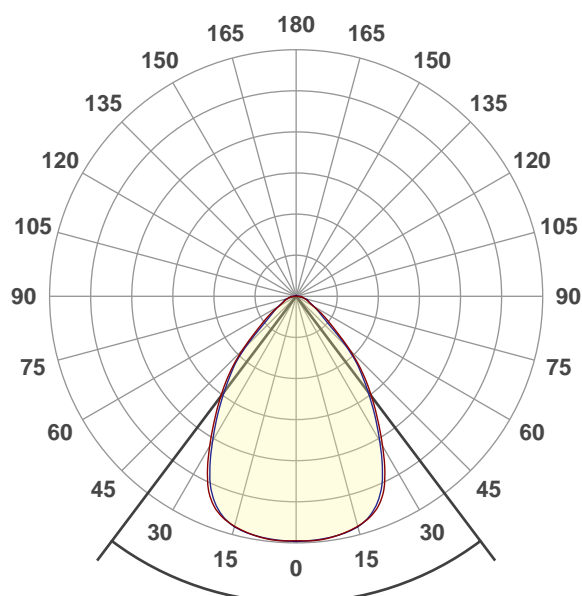


Beam angle 50%: 74°

Field angle 10%: 115,5°


Cut off angle 2.5%: 160,3°

Spectra

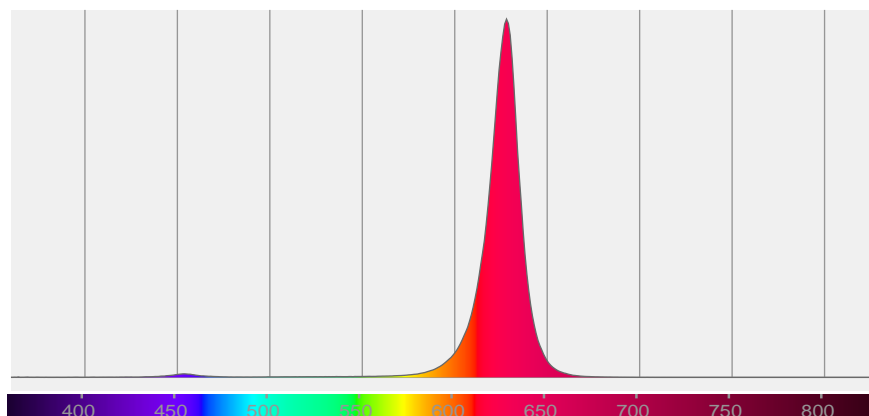

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
74°	115,5°	160,3°	92,3%	78,9%

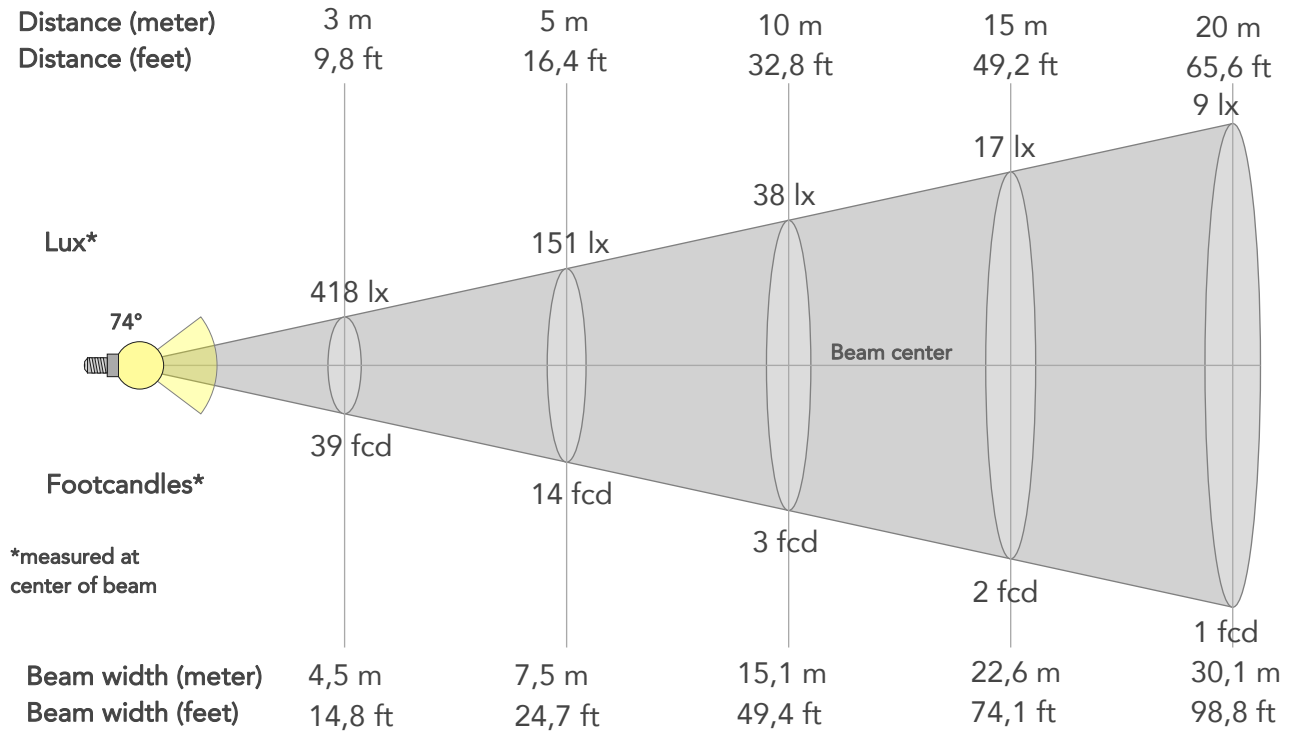

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	3764lx	941lx	418lx	235lx	151lx	67lx	38lx	17lx	9lx	6lx	4lx	2lx	2lx
Footcand.	350fcd	87fcd	39fcd	22fcd	14fcd	6fcd	3fcd	2fcd	1fcd	1fcd	0fcd	0fcd	0fcd
Beam wid.	1,5m	3m	4,5m	6m	7,5m	11,3m	15,1m	22,6m	30,1m	37,7m	45,2m	60,2m	75,3m
Beam wid.	5ft	9,9ft	14,8ft	19,7ft	24,7ft	37,1ft	49,4ft	74,1ft	98,8ft	123,5ft	148,2ft	197,6ft	247ft


LINEAR DISTRIBUTION DIAGRAM

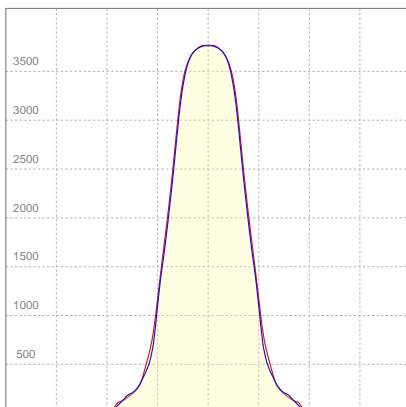

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	0,864A	168W	35lm/W
Power FC			
0,86			

ISO CANDELA DIAGRAM

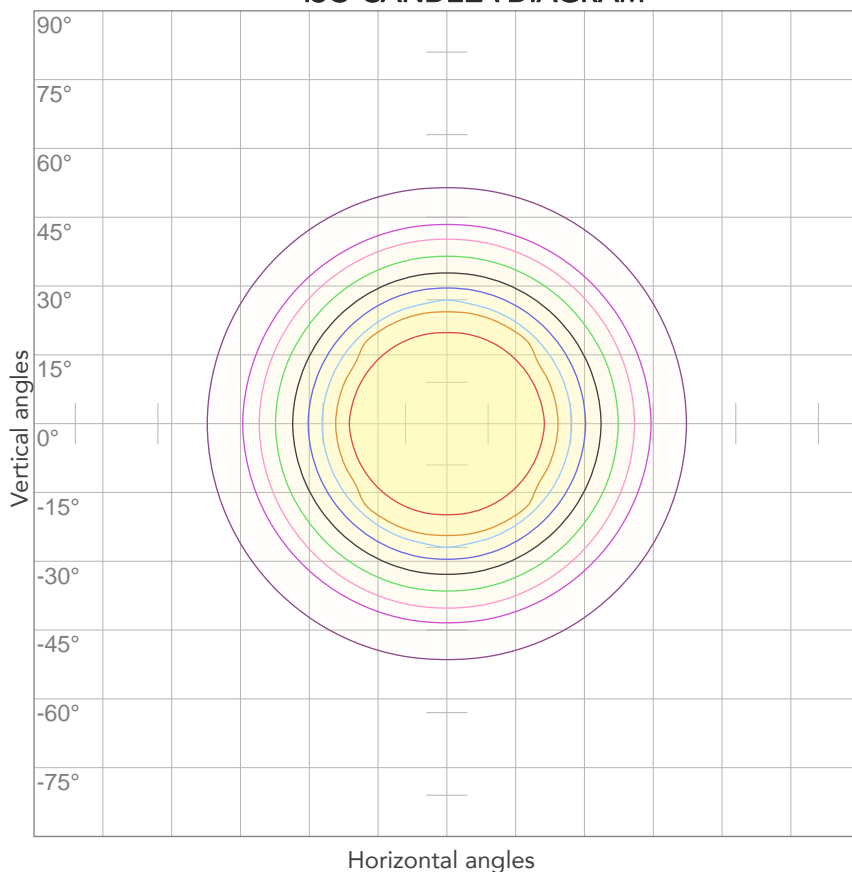


10%	376 cd
20%	753 cd
30%	1129 cd
40%	1505 cd
50%	1882 cd
60%	2258 cd
70%	2635 cd
80%	3011 cd

Conditions:

Number of c-planes: 4

Candela at center: 3764 cd

ISO LUX DIAGRAM

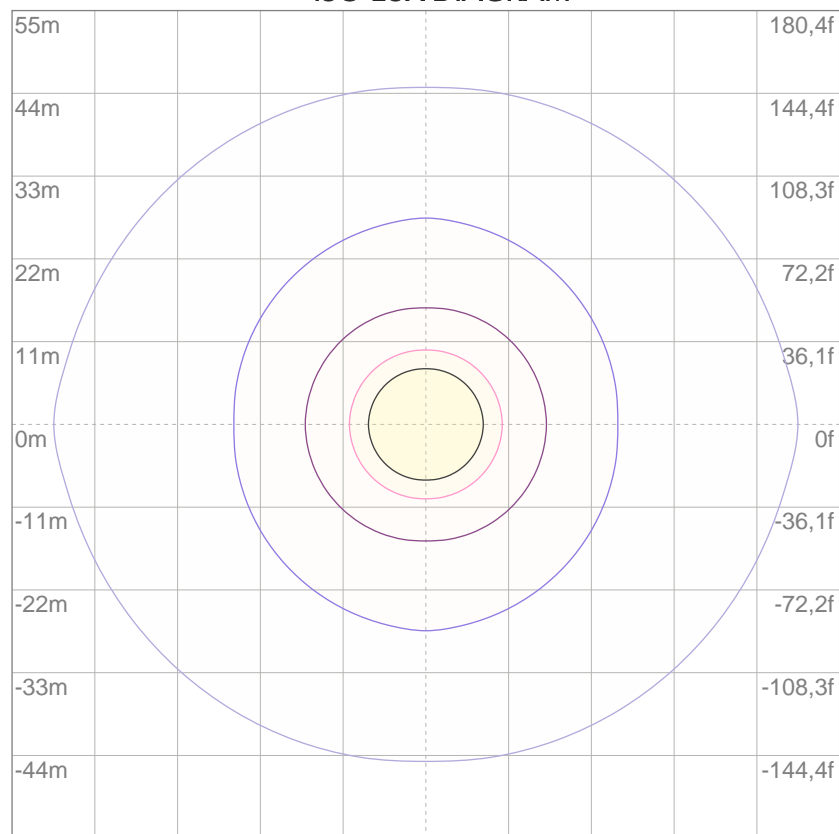

3%	1,13 lx
5%	1,88 lx
10%	3,76 lx
30%	11,3 lx
50%	18,8 lx

Conditions:

Number of c-planes: 4

Lux at center: 37,6 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

12725 lm

Peak candela output:

4336 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter HD

Target:


Green

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:55:01

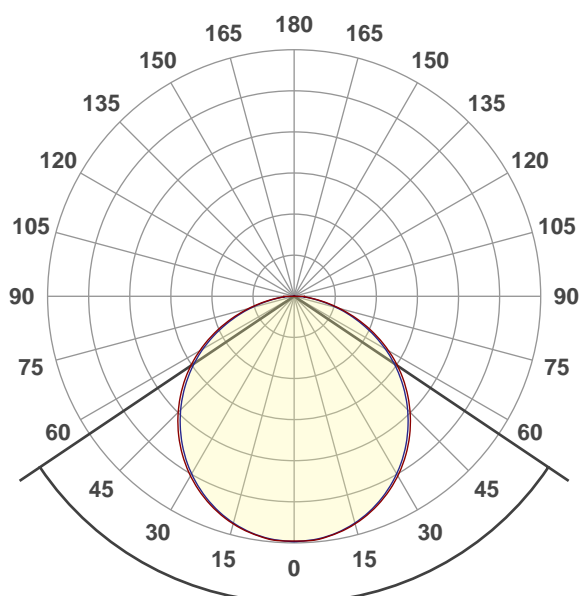


Beam angle 50%: 112,2°

Field angle 10%: 161,7°


Cut off angle 2.5%: 176,4°

Spectra

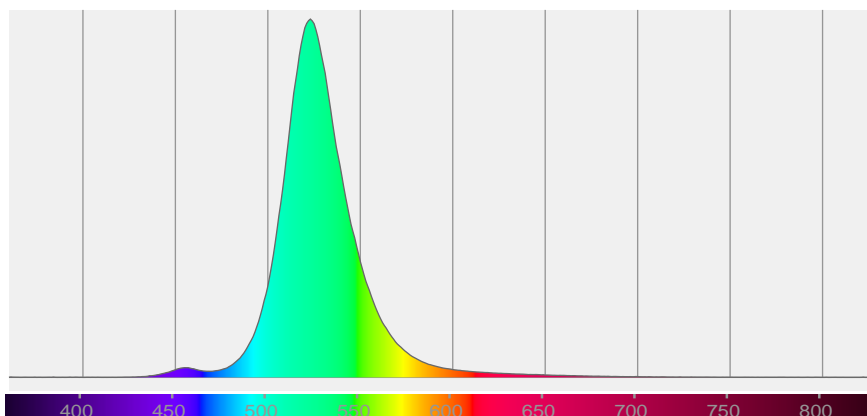

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
112,2°	161,7°	176,4°	76,3%	51,9%

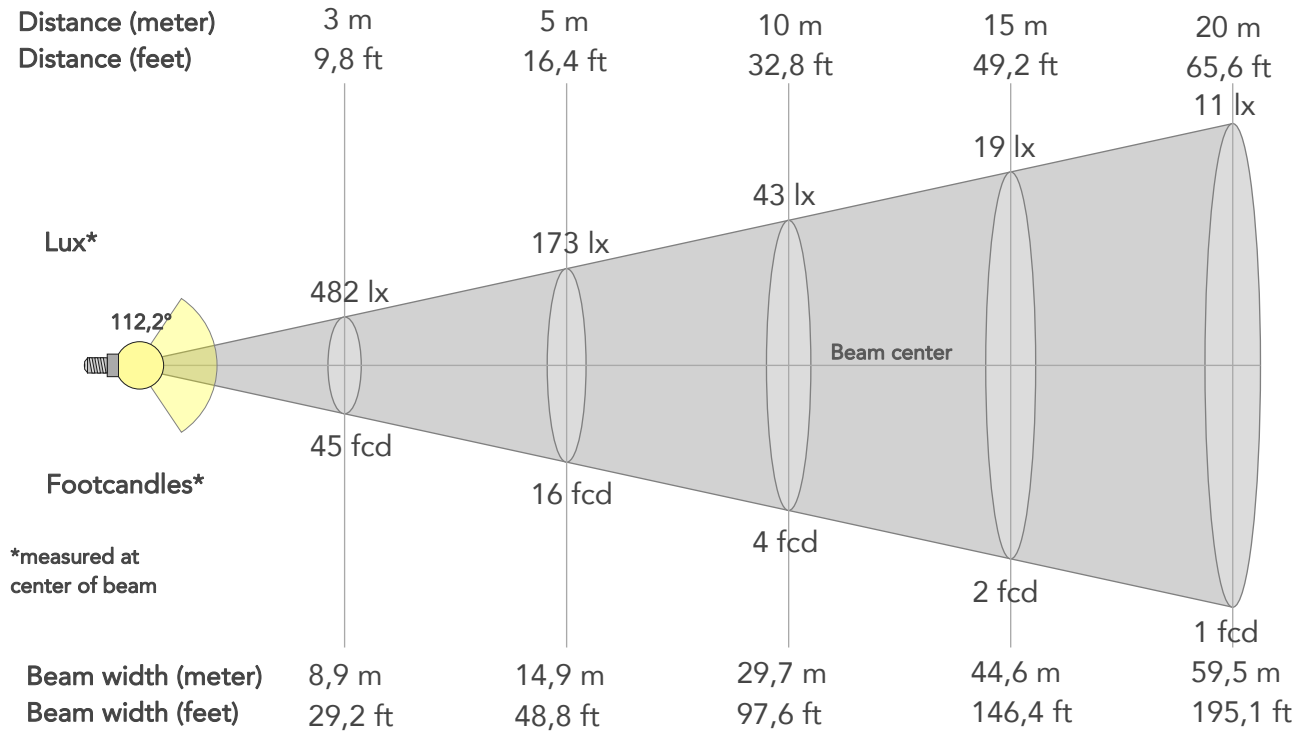

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	4334lx	1084lx	482lx	271lx	173lx	77lx	43lx	19lx	11lx	7lx	5lx	3lx	2lx
Footcand.	403fcd	101fcd	45fcd	25fcd	16fcd	7fcd	4fcd	2fcd	1fcd	1fcd	0fcd	0fcd	0fcd
Beam wid.	3m	5,9m	8,9m	11,9m	14,9m	22,3m	29,7m	44,6m	59,5m	74,4m	89,2m	119m	148,7m
Beam wid.	9,8ft	19,6ft	29,2ft	39ft	48,8ft	73,2ft	97,6ft	146,4ft	195,1ft	243,9ft	292,7ft	390,3ft	487,9ft


LINEAR DISTRIBUTION DIAGRAM

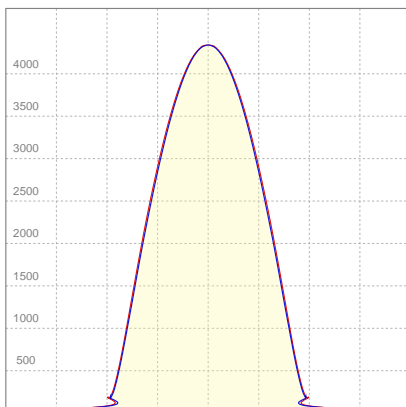

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	1,02A	202W	63lm/W

ISO CANDELA DIAGRAM

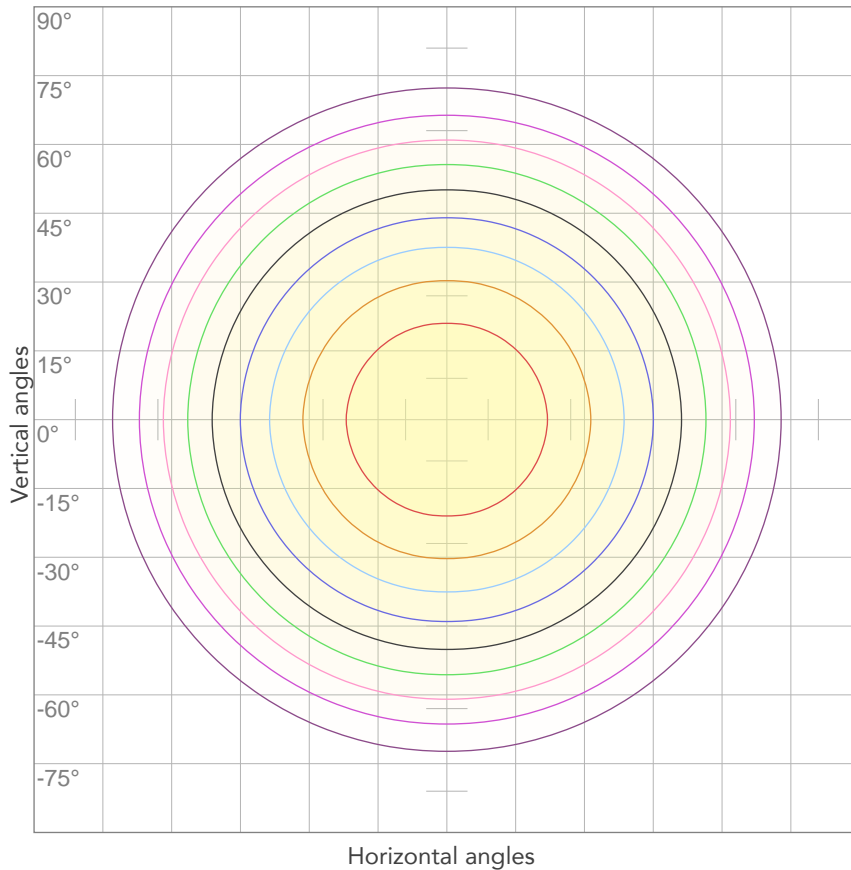


10%	433 cd
20%	867 cd
30%	1300 cd
40%	1734 cd
50%	2167 cd
60%	2601 cd
70%	3034 cd
80%	3467 cd

Conditions:

Number of c-planes: 4

Candela at center: 4334 cd

ISO LUX DIAGRAM

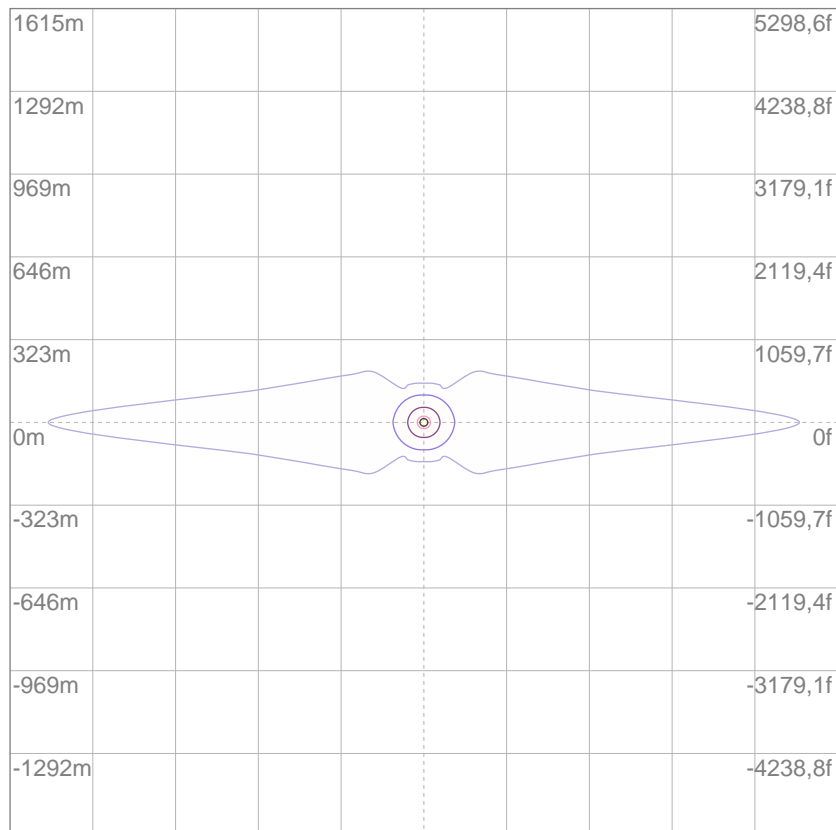

3%	1,30 lx
5%	2,17 lx
10%	4,33 lx
30%	13,0 lx
50%	21,7 lx

Conditions:

Number of c-planes: 4

Lux at center: 43,3 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

14728 lm

Peak candela output:

5593 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter MD

Target:


Green

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:18:58

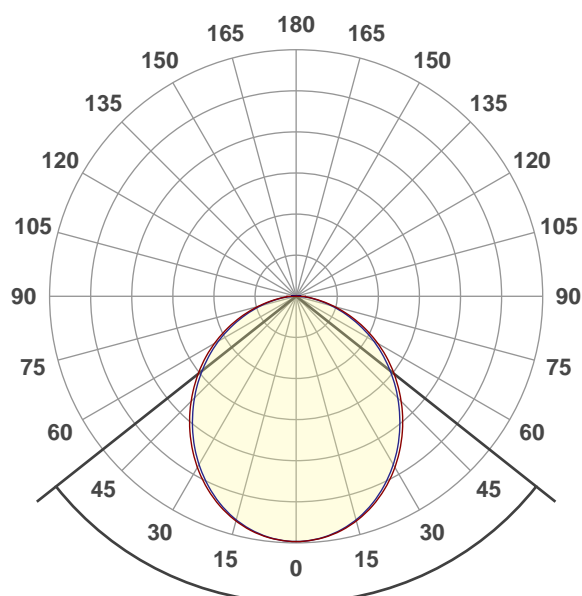


Beam angle 50%: 103,2°

Field angle 10%: 158,8°


Cut off angle 2.5%: 175,5°

Spectra

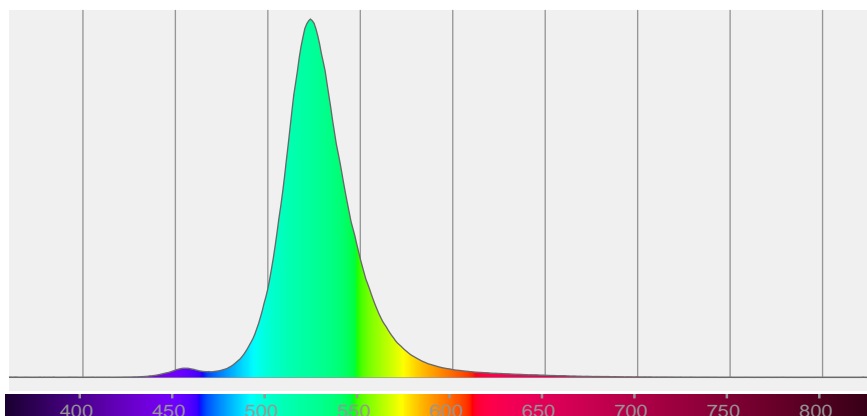

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
103,2°	158,8°	175,5°	78,9%	55,1%

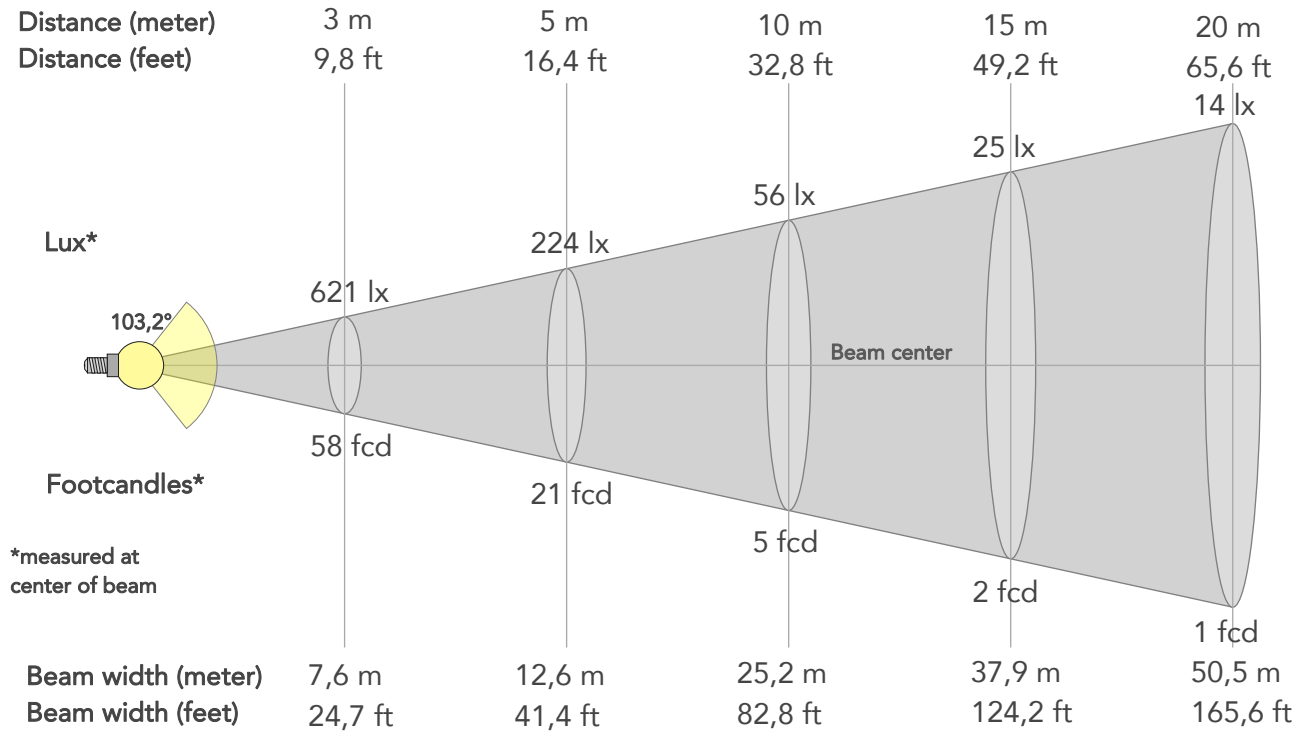

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	5591lx	1398lx	621lx	349lx	224lx	99lx	56lx	25lx	14lx	9lx	6lx	3lx	2lx
Footcand.	519fcd	130fcd	58fcd	32fcd	21fcd	9fcd	5fcd	2fcd	1fcd	1fcd	1fcd	0fcd	0fcd
Beam wid.	2,5m	5m	7,6m	10,1m	12,6m	18,9m	25,2m	37,9m	50,5m	63,1m	75,7m	101m	126,2m
Beam wid.	8,3ft	16,7ft	24,7ft	33,1ft	41,4ft	62,1ft	82,8ft	124,2ft	165,6ft	207ft	248,4ft	331,2ft	414,1ft


LINEAR DISTRIBUTION DIAGRAM

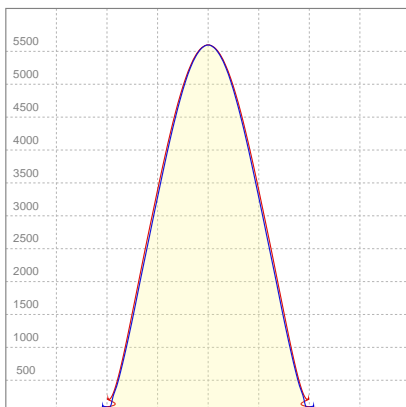

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
224V	1,03A	202,9W	73lm/W

ISO CANDELA DIAGRAM

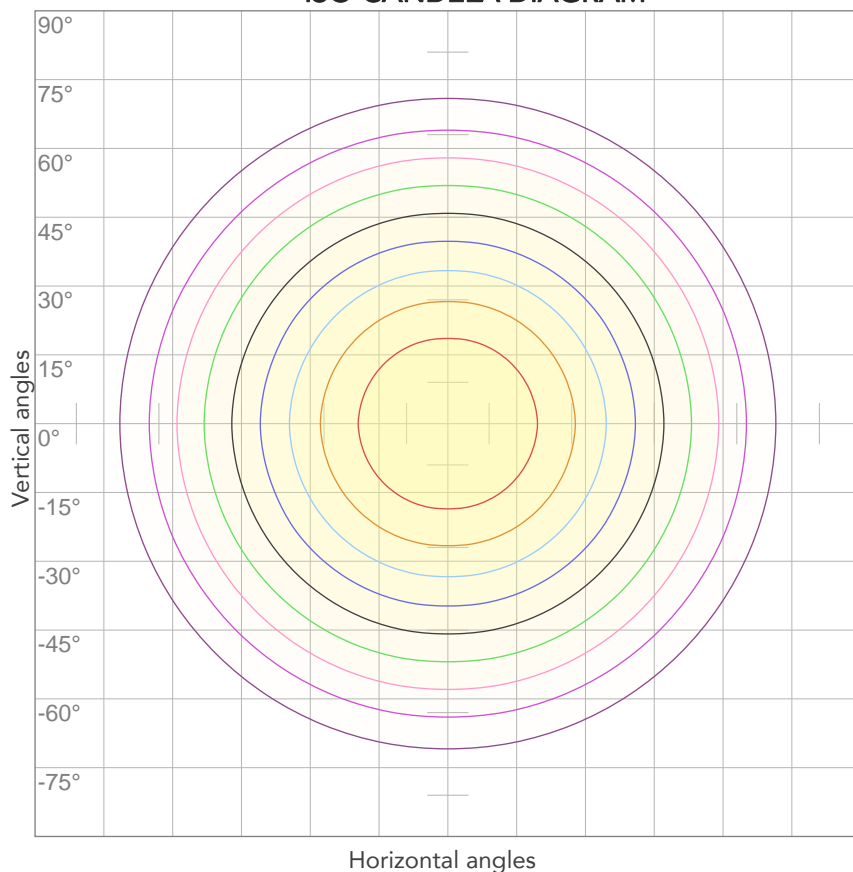


10%	559 cd
20%	1118 cd
30%	1677 cd
40%	2236 cd
50%	2795 cd
60%	3355 cd
70%	3914 cd
80%	4473 cd

Conditions:

Number of c-planes: 4

Candela at center: 5591 cd

ISO LUX DIAGRAM

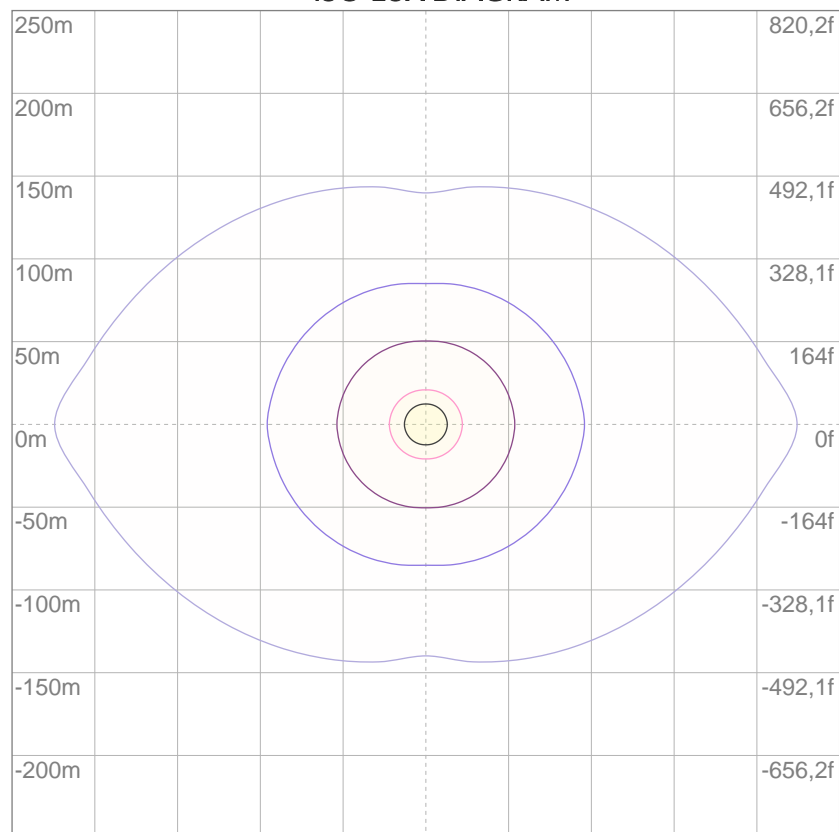

3%	1,68 lx
5%	2,80 lx
10%	5,59 lx
30%	16,8 lx
50%	28,0 lx

Conditions:

Number of c-planes: 4

Lux at center: 55,9 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

14696 lm

Peak candela output:

5440 cd

PRODUCT NAME:

ECLPANEL TWC

MEASUREMENT CONDITIONS:

Beam angle:

Filter LD

Target:


Green

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:13:00

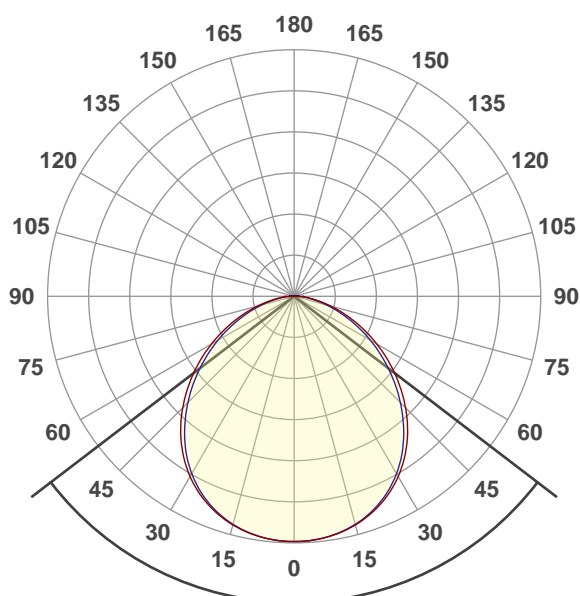


Beam angle 50%: 105,2°

Field angle 10%: 157,7°


Cut off angle 2.5%: 175,9°

Spectra

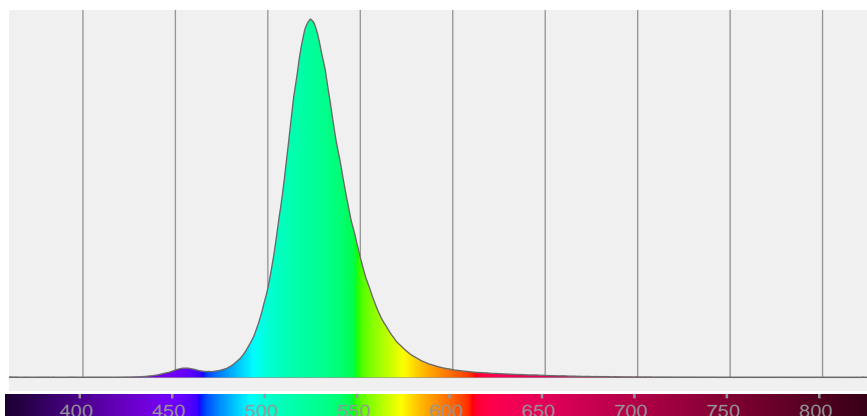

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
105,2°	157,7°	175,9°	80,0%	56,0%

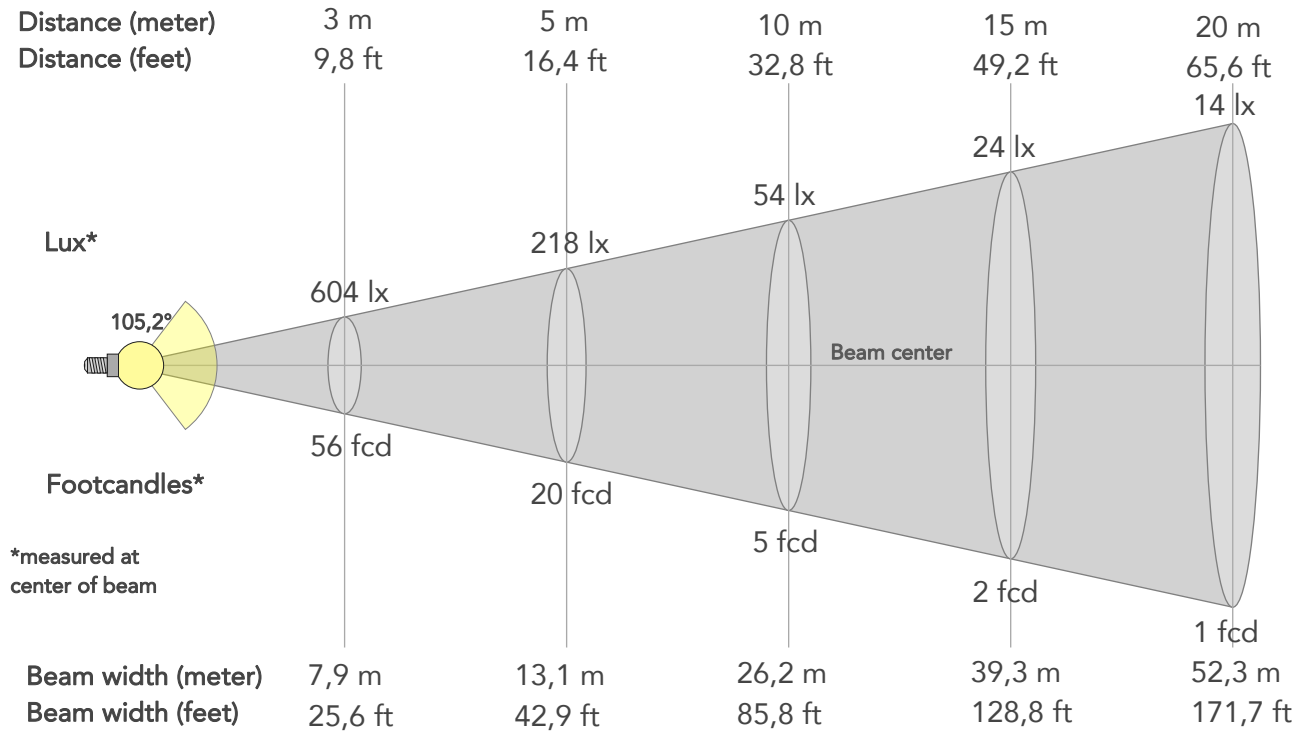

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	5440lx	1360lx	604lx	340lx	218lx	97lx	54lx	24lx	14lx	9lx	6lx	3lx	2lx
Footcand.	505fcd	126fcd	56fcd	32fcd	20fcd	9fcd	5fcd	2fcd	1fcd	1fcd	1fcd	0fcd	0fcd
Beam wid.	2,6m	5,2m	7,9m	10,5m	13,1m	19,6m	26,2m	39,3m	52,3m	65,4m	78,5m	104,7m	130,8m
Beam wid.	8,6ft	17,3ft	25,6ft	34,3ft	42,9ft	64,4ft	85,8ft	128,8ft	171,7ft	214,6ft	257,5ft	343,3ft	429,2ft


LINEAR DISTRIBUTION DIAGRAM

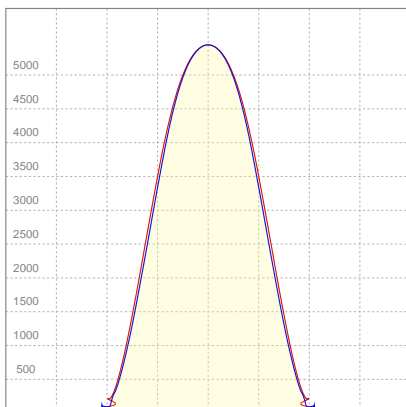

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	1,02A	202,1W	73lm/W

ISO CANDELA DIAGRAM

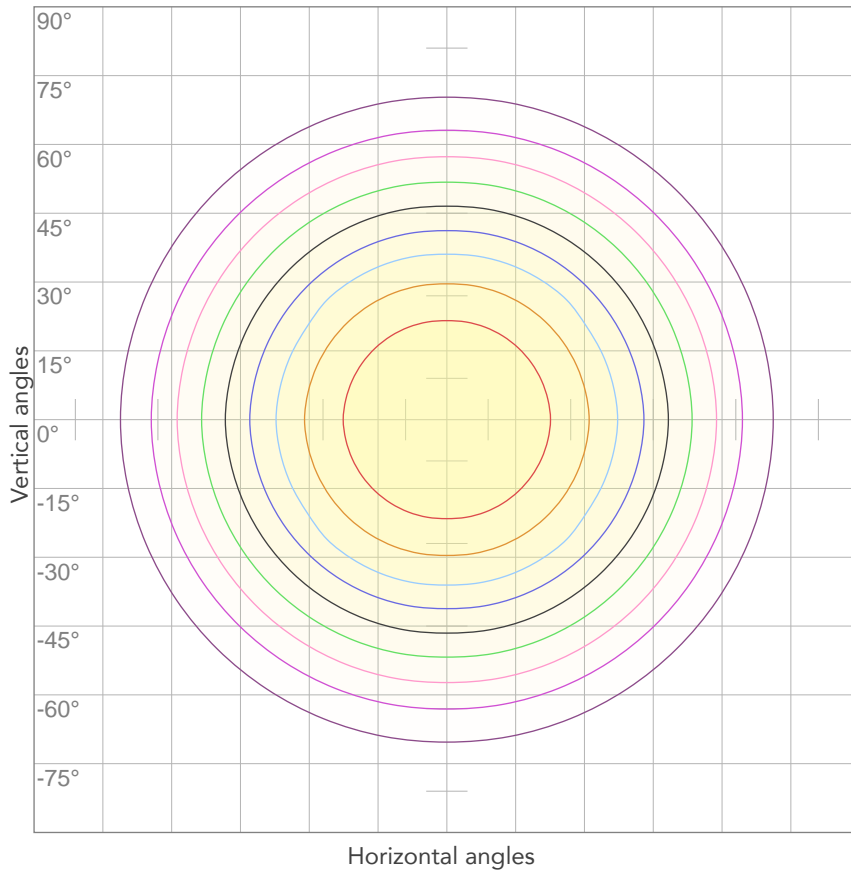


10%	544 cd
20%	1088 cd
30%	1632 cd
40%	2176 cd
50%	2720 cd
60%	3264 cd
70%	3808 cd
80%	4352 cd

Conditions:

Number of c-planes: 4

Candela at center: 5440 cd

ISO LUX DIAGRAM

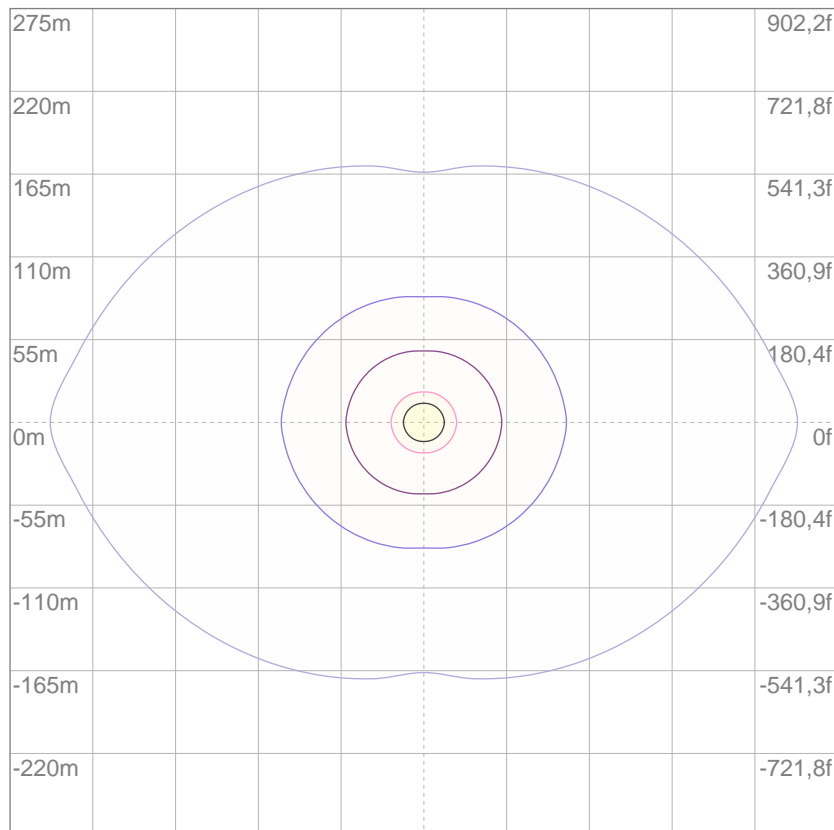

3%	1,63 lx
5%	2,72 lx
10%	5,44 lx
30%	16,3 lx
50%	27,2 lx

Conditions:

Number of c-planes: 4

Lux at center: 54,4 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

12728 lm

Peak candela output:

8080 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter Int.

Target:


Green

Operator:

Paolo Carvone

Date and time:

18/11/2020 10:41:57

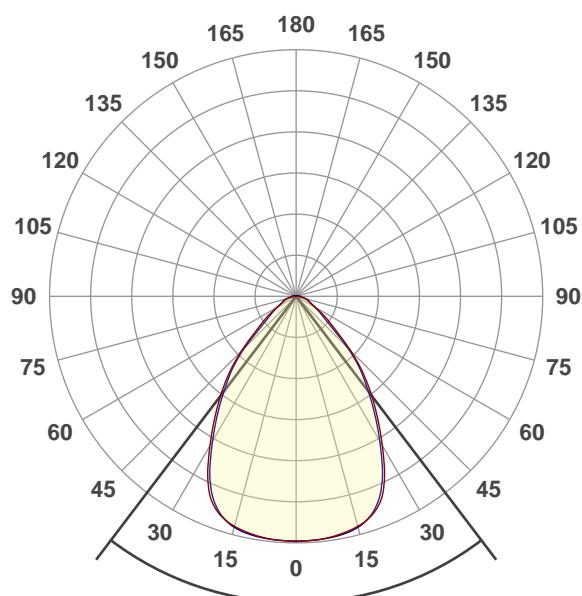


Beam angle 50%: 74,4°

Field angle 10%: 117,1°

Cut off angle 2.5%: 161,3°


Spectra

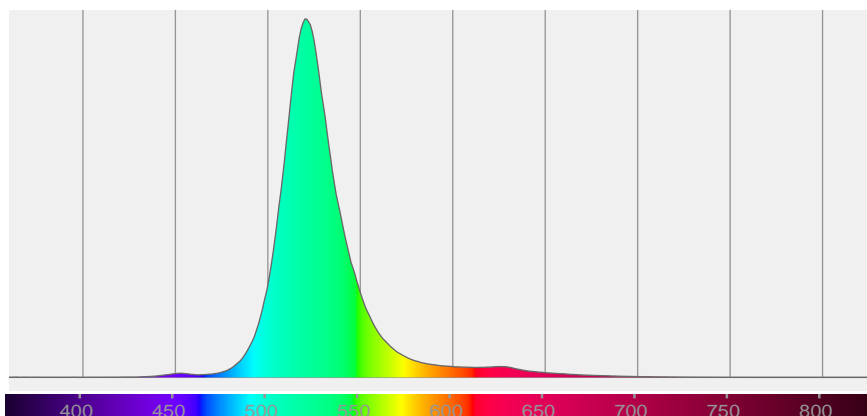

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
74,4°	117,1°	161,3°	92,0%	78,2%

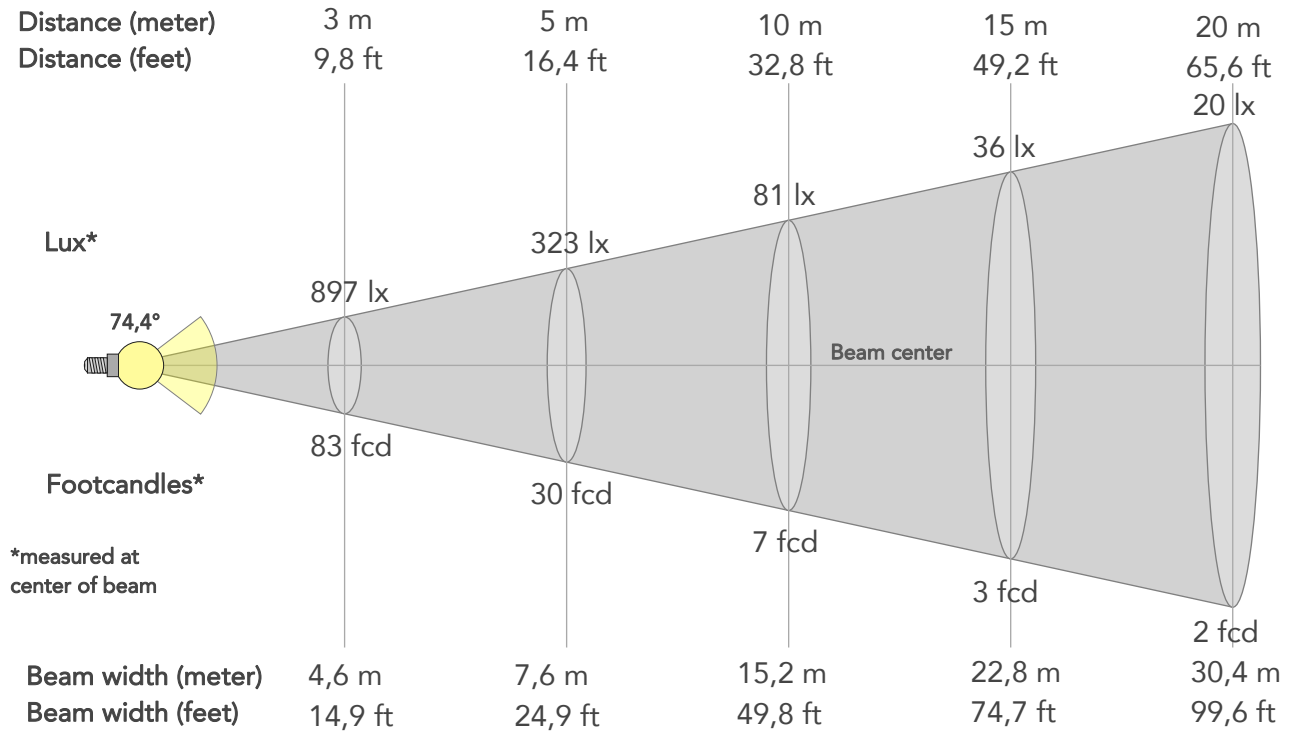

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	8073lx	2018lx	897lx	505lx	323lx	144lx	81lx	36lx	20lx	13lx	9lx	5lx	3lx
Footcand.	750fcd	187fcd	83fcd	47fcd	30fcd	13fcd	7fcd	3fcd	2fcd	1fcd	1fcd	0fcd	0fcd
Beam wid.	1,5m	3m	4,6m	6,1m	7,6m	11,4m	15,2m	22,8m	30,4m	38m	45,6m	60,7m	75,9m
Beam wid.	5ft	10ft	14,9ft	19,9ft	24,9ft	37,4ft	49,8ft	74,7ft	99,6ft	124,5ft	149,4ft	199,2ft	249ft

LINEAR DISTRIBUTION DIAGRAM

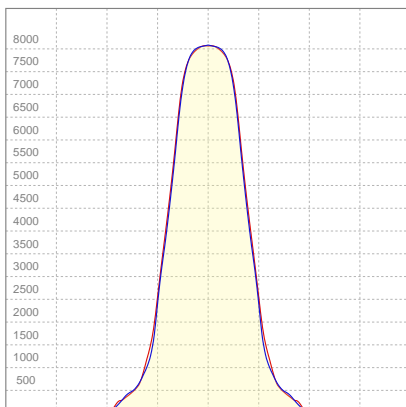


ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	1,04A	210,1W	61lm/W

Power FC
0,9

ISO CANDELA DIAGRAM

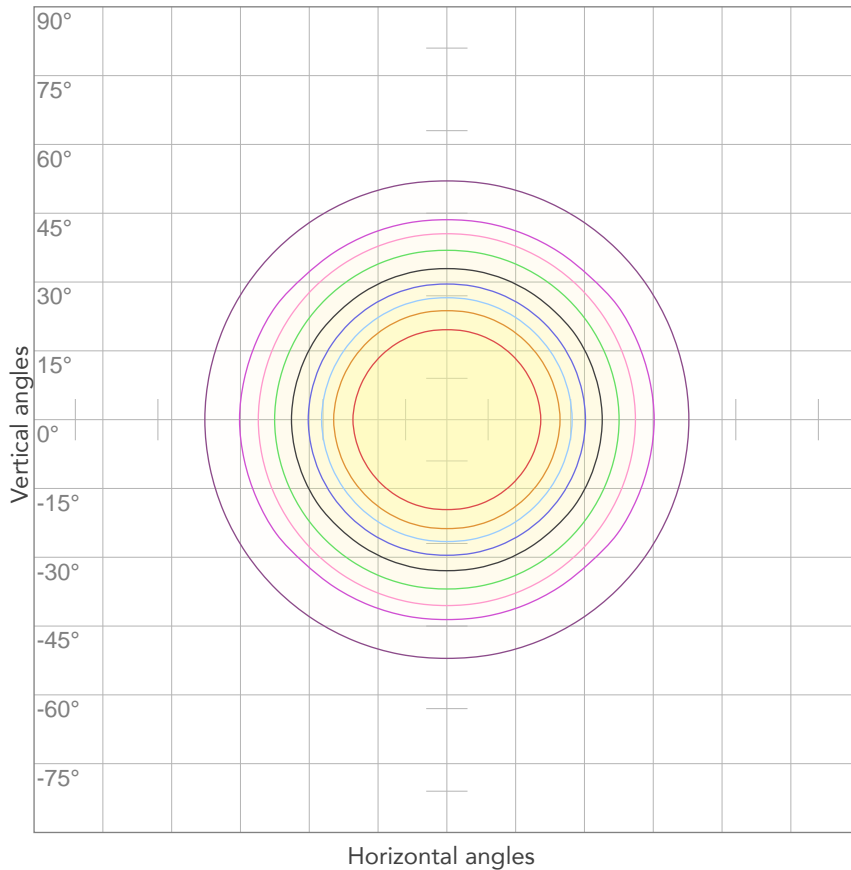


10%	807 cd
20%	1615 cd
30%	2422 cd
40%	3229 cd
50%	4036 cd
60%	4844 cd
70%	5651 cd
80%	6458 cd

Conditions:

Number of c-planes: 4

Candela at center: 8073 cd

ISO LUX DIAGRAM

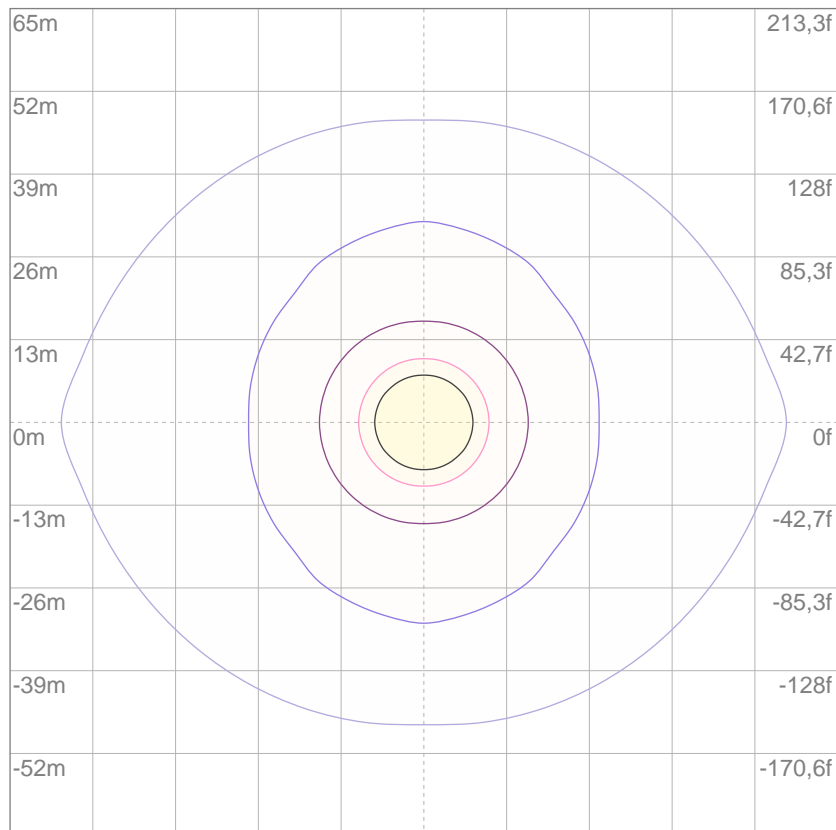

3%	2,42 lx
5%	4,04 lx
10%	8,07 lx
30%	24,2 lx
50%	40,4 lx

Conditions:

Number of c-planes: 4

Lux at center: 80,7 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

2698 lm

Peak candela output:

927 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter HD

Target:


Blue

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:56:46

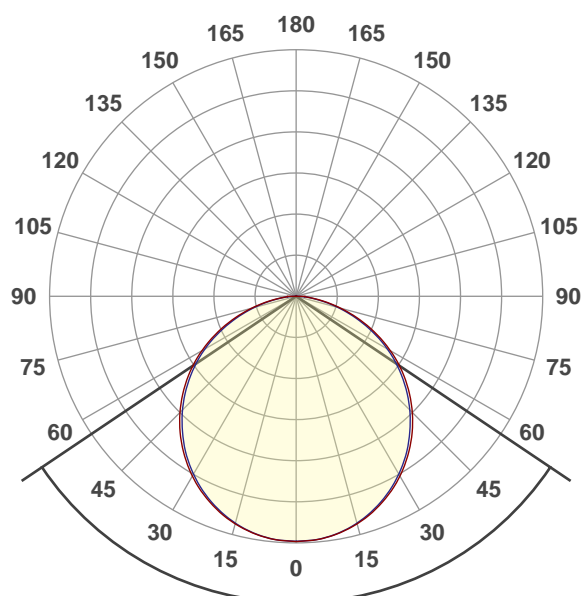


Beam angle 50%: 112,1°

Field angle 10%: 161°


Cut off angle 2.5%: 176,5°

Spectra

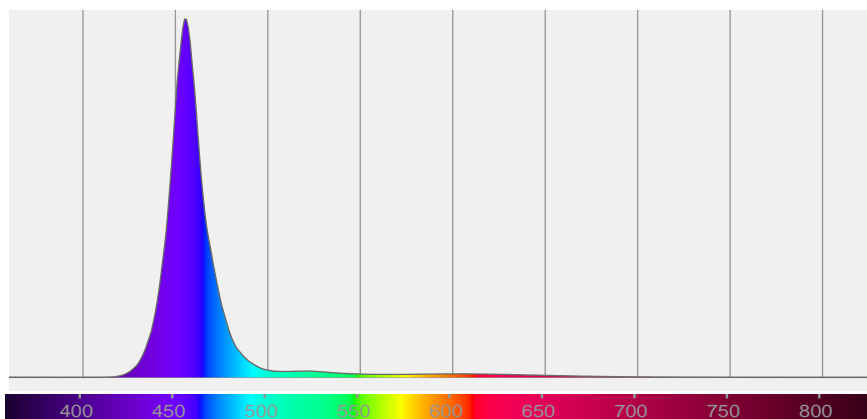

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
112,1°	161°	176,5°	77,1%	52,4%

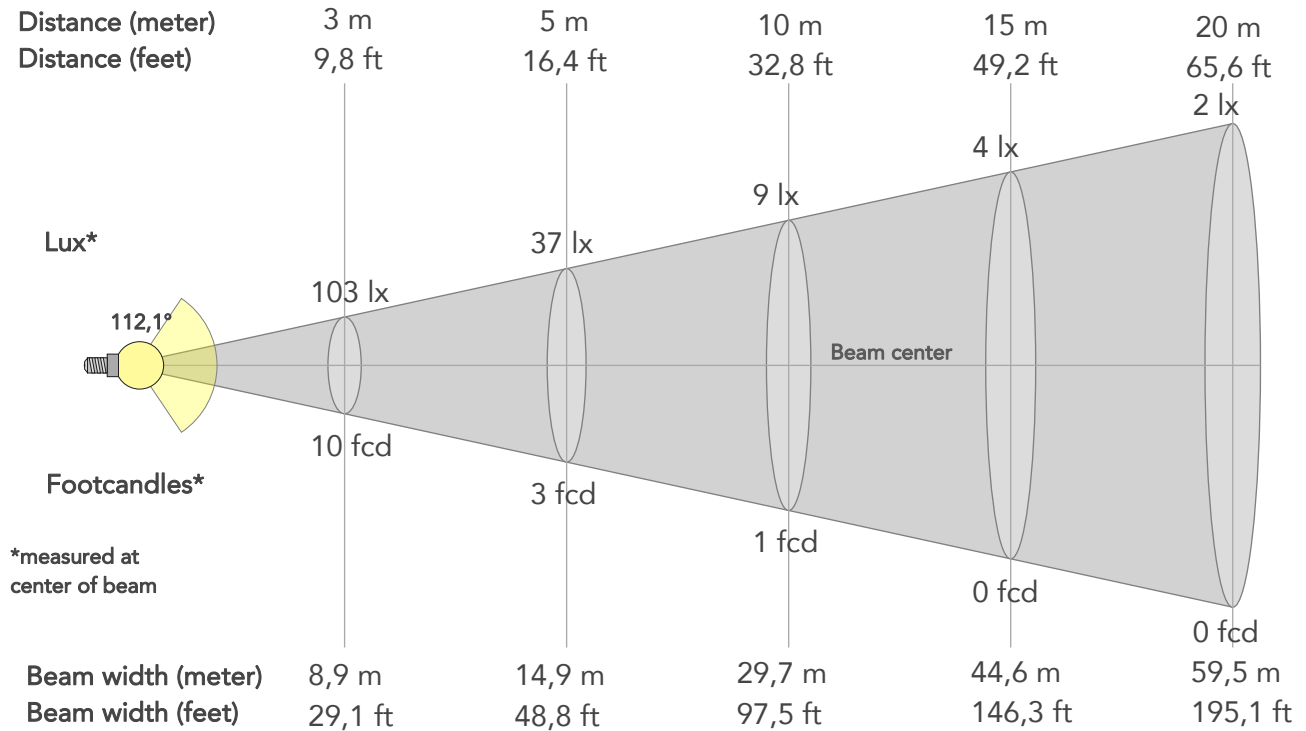

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	927lx	232lx	103lx	58lx	37lx	16lx	9lx	4lx	2lx	1lx	1lx	1lx	0lx
Footcand.	86fcd	22fcd	10fcd	5fcd	3fcd	2fcd	1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd
Beam wid.	3m	5,9m	8,9m	11,9m	14,9m	22,3m	29,7m	44,6m	59,5m	74,3m	89,2m	118,9m	148,7m
Beam wid.	9,8ft	19,6ft	29,1ft	39ft	48,8ft	73,1ft	97,5ft	146,3ft	195,1ft	243,8ft	292,6ft	390,1ft	487,6ft


LINEAR DISTRIBUTION DIAGRAM

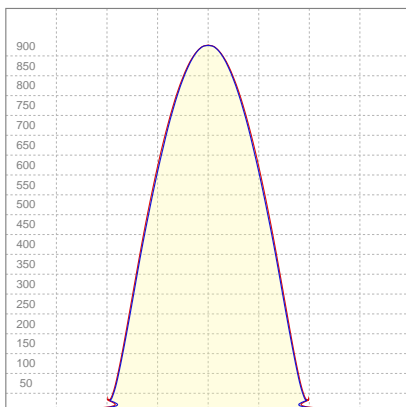

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	0,701A	124,1W	22lm/W

ISO CANDELA DIAGRAM

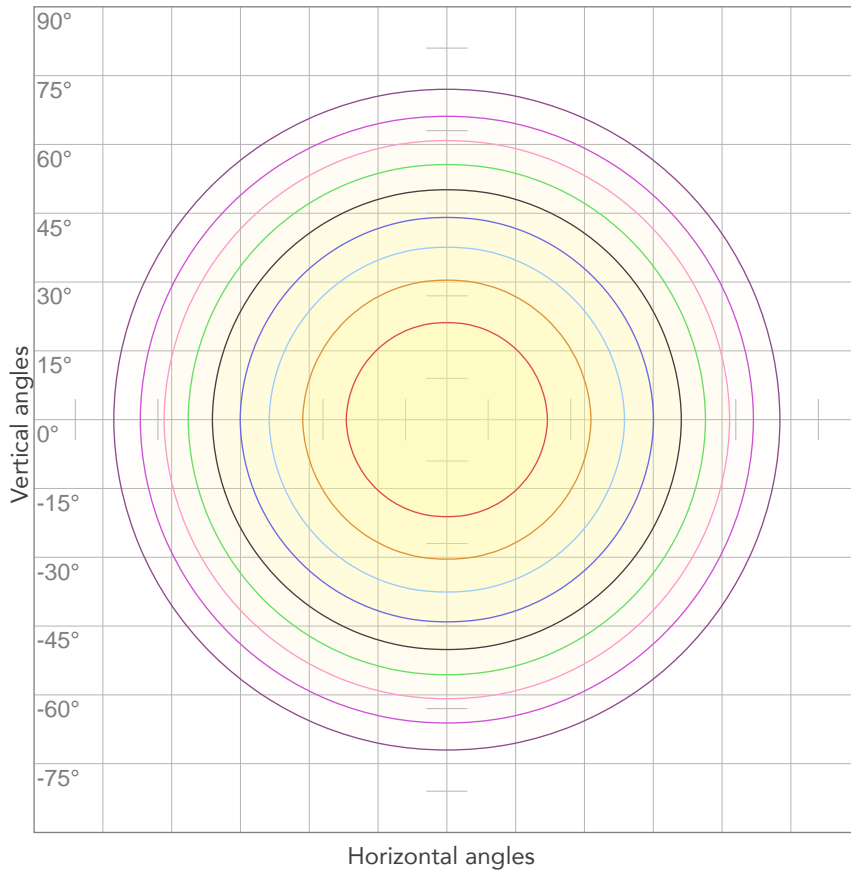


10%	93 cd
20%	185 cd
30%	278 cd
40%	371 cd
50%	463 cd
60%	556 cd
70%	649 cd
80%	741 cd

Conditions:

Number of c-planes: 4

Candela at center: 927 cd

ISO LUX DIAGRAM

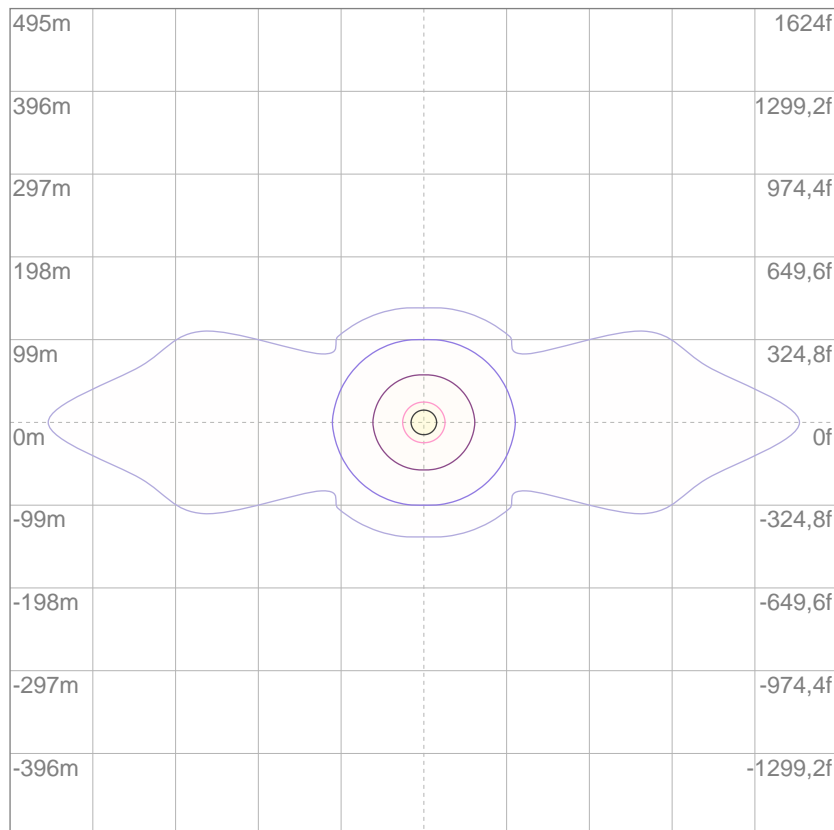

3%	0,278 lx
5%	0,463 lx
10%	0,927 lx
30%	2,78 lx
50%	4,63 lx

Conditions:

Number of c-planes: 4

Lux at center: 9,27 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

2973 lm

Peak candela output:

1137 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter MD

Target:


Blue

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:20:37

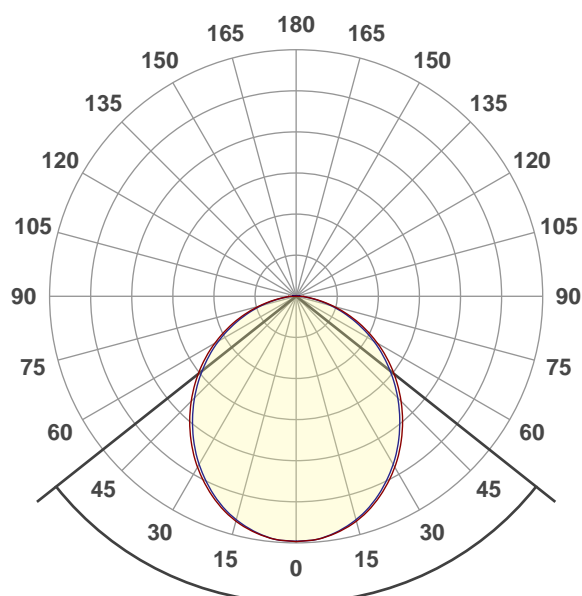


Beam angle 50%: 103,2°

Field angle 10%: 158,1°


Cut off angle 2.5%: 176,5°

Spectra

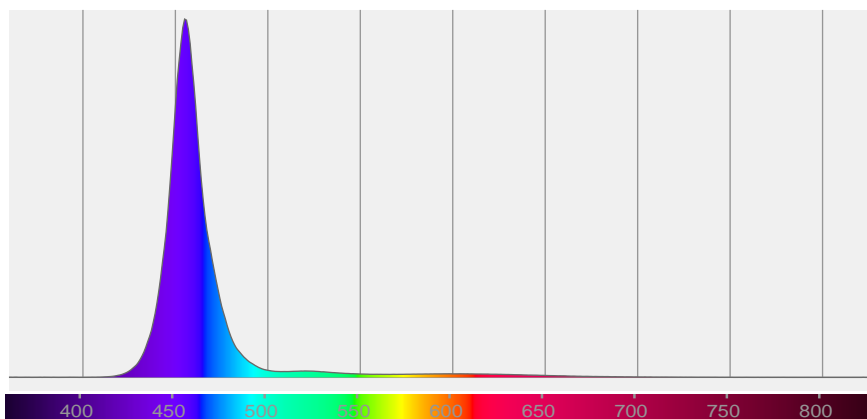

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
103,2°	158,1°	176,5°	79,4%	55,3%

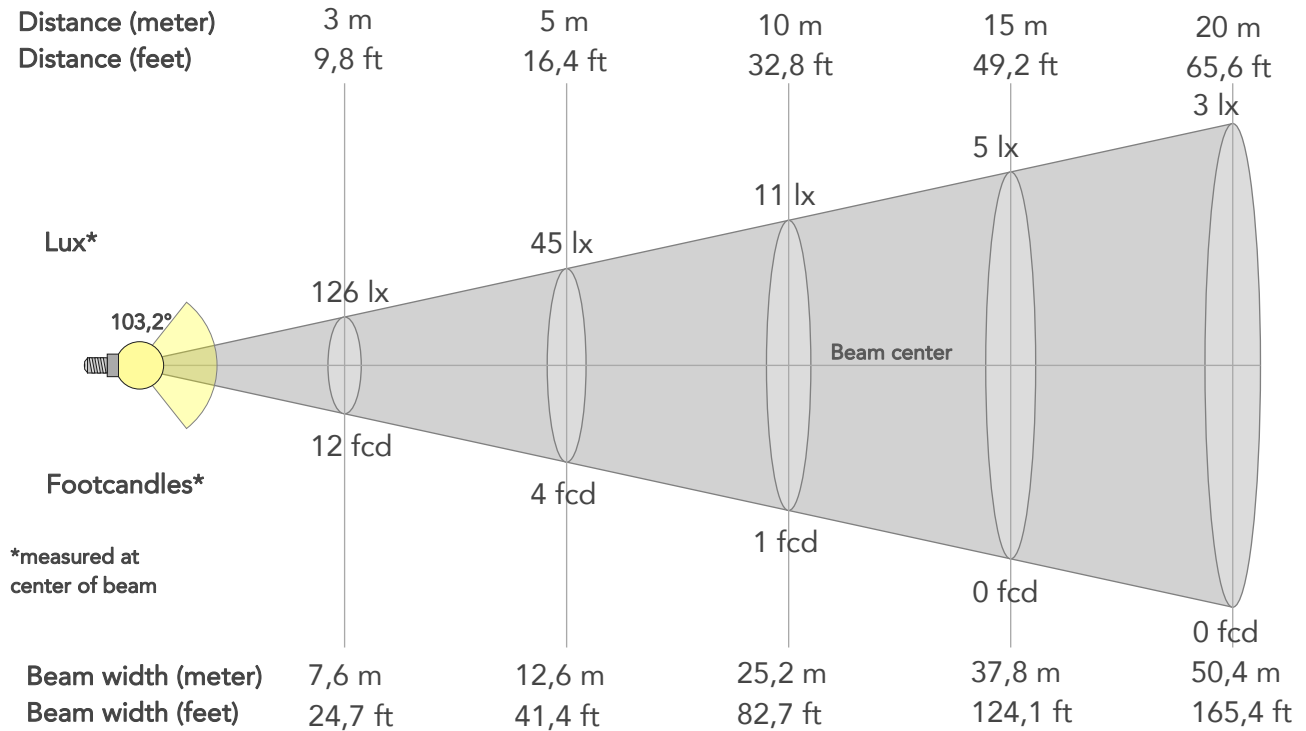

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	1136lx	284lx	126lx	71lx	45lx	20lx	11lx	5lx	3lx	2lx	1lx	1lx	0lx
Footcand.	106fcd	26fcd	12fcd	7fcd	4fcd	2fcd	1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd
Beam wid.	2,5m	5m	7,6m	10,1m	12,6m	18,9m	25,2m	37,8m	50,4m	63m	75,6m	100,9m	126,1m
Beam wid.	8,3ft	16,6ft	24,7ft	33ft	41,4ft	62ft	82,7ft	124,1ft	165,4ft	206,8ft	248,1ft	330,8ft	413,5ft


LINEAR DISTRIBUTION DIAGRAM

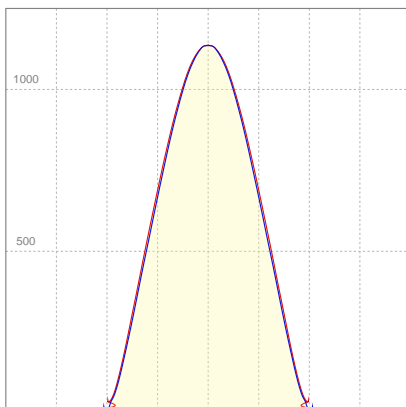

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
224V	0,699A	123,7W	24lm/W

ISO CANDELA DIAGRAM

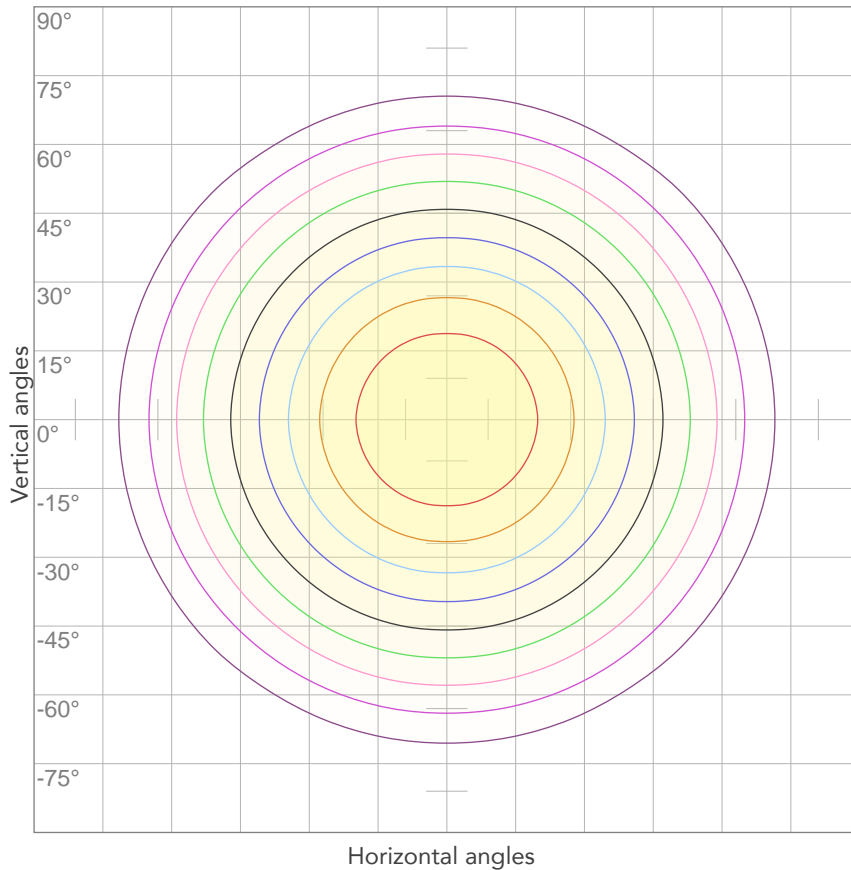


10%	114 cd
20%	227 cd
30%	341 cd
40%	454 cd
50%	568 cd
60%	682 cd
70%	795 cd
80%	909 cd

Conditions:

Number of c-planes: 4

Candela at center: 1136 cd

ISO LUX DIAGRAM

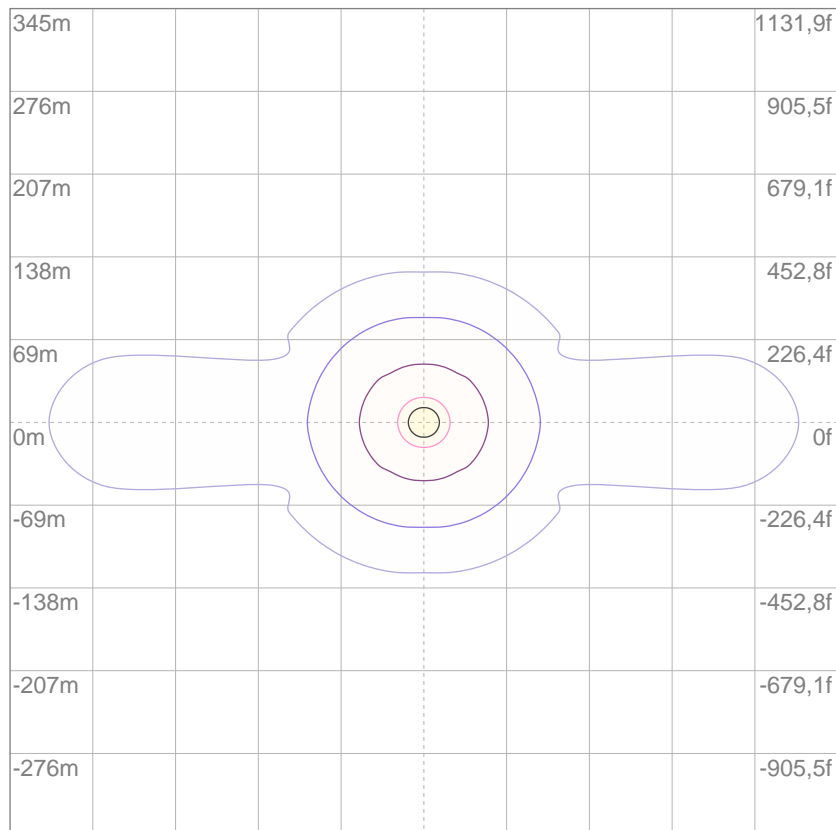

3%	0,341 lx
5%	0,568 lx
10%	1,14 lx
30%	3,41 lx
50%	5,68 lx

Conditions:

Number of c-planes: 4

Lux at center: 11,4 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

2965 lm

Peak candela output:

1113 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter LD

Target:


Blue

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:14:35

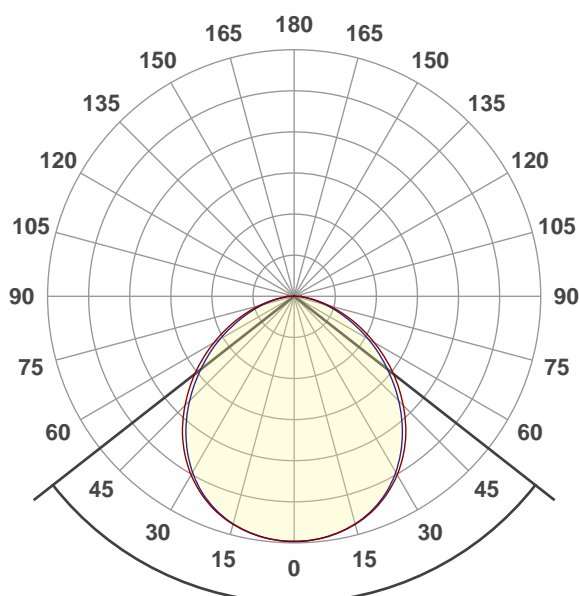


Beam angle 50%: 103,9°

Field angle 10%: 156,5°


Cut off angle 2.5%: 176,8°

Spectra

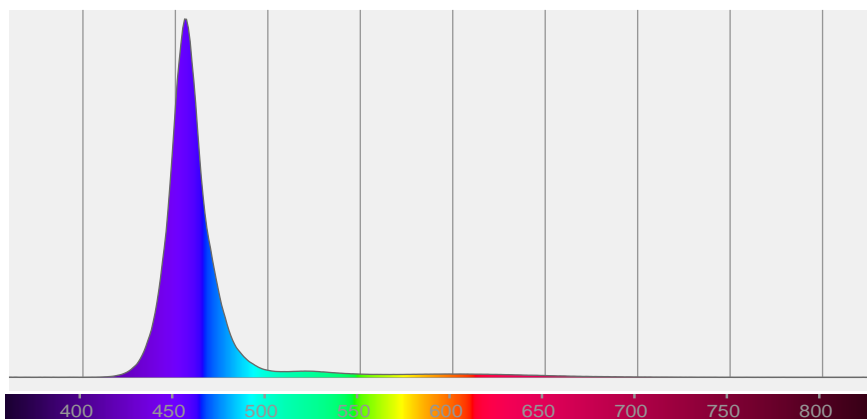

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
103,9°	156,5°	176,8°	80,1%	56,3%

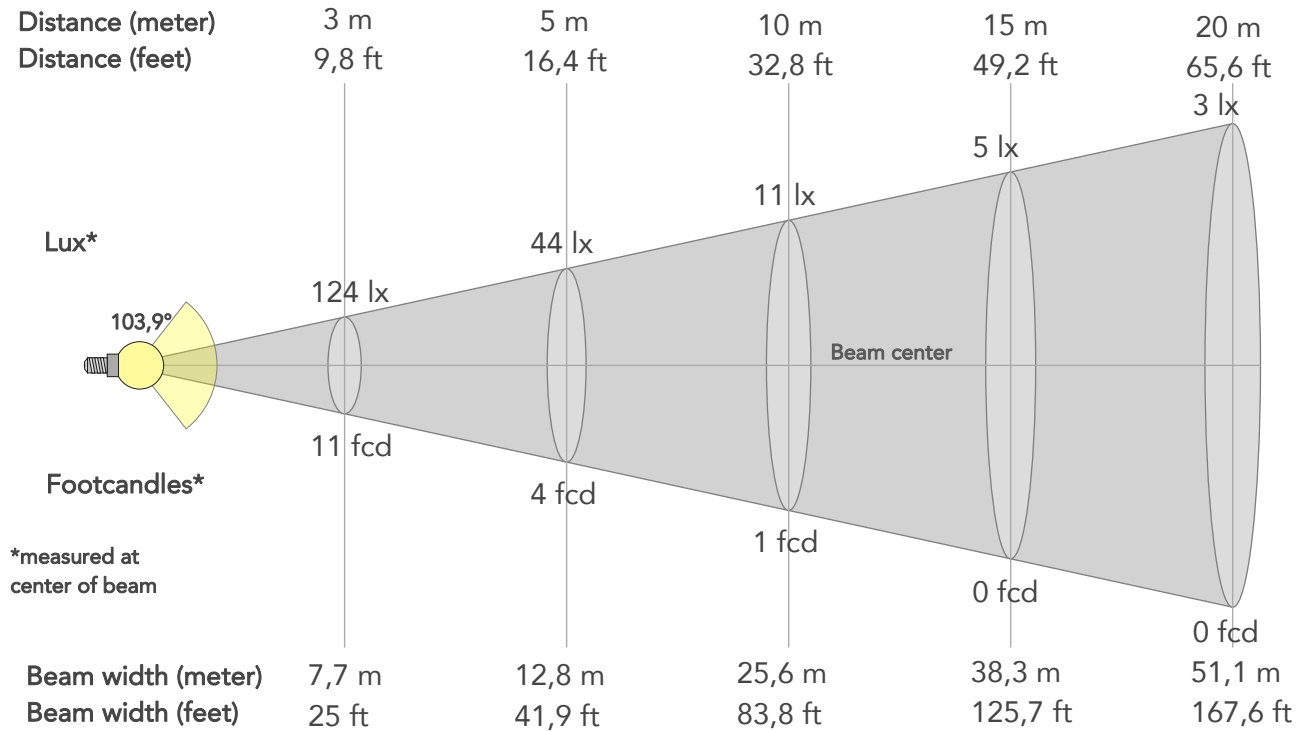

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	1112lx	278lx	124lx	70lx	44lx	20lx	11lx	5lx	3lx	2lx	1lx	1lx	0lx
Footcand.	103fcd	26fcd	11fcd	6fcd	4fcd	2fcd	1fcd	0fcd	0fcd	0fcd	0fcd	0fcd	0fcd
Beam wid.	2,6m	5,1m	7,7m	10,2m	12,8m	19,2m	25,6m	38,3m	51,1m	63,9m	76,7m	102,2m	127,8m
Beam wid.	8,4ft	16,9ft	25ft	33,5ft	41,9ft	62,9ft	83,8ft	125,7ft	167,6ft	209,6ft	251,5ft	335,3ft	419,1ft


LINEAR DISTRIBUTION DIAGRAM

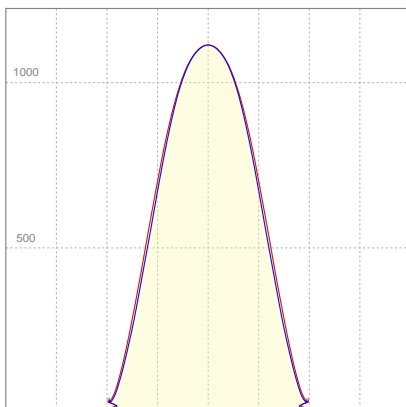

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	0,701A	124,1W	24lm/W

ISO CANDELA DIAGRAM

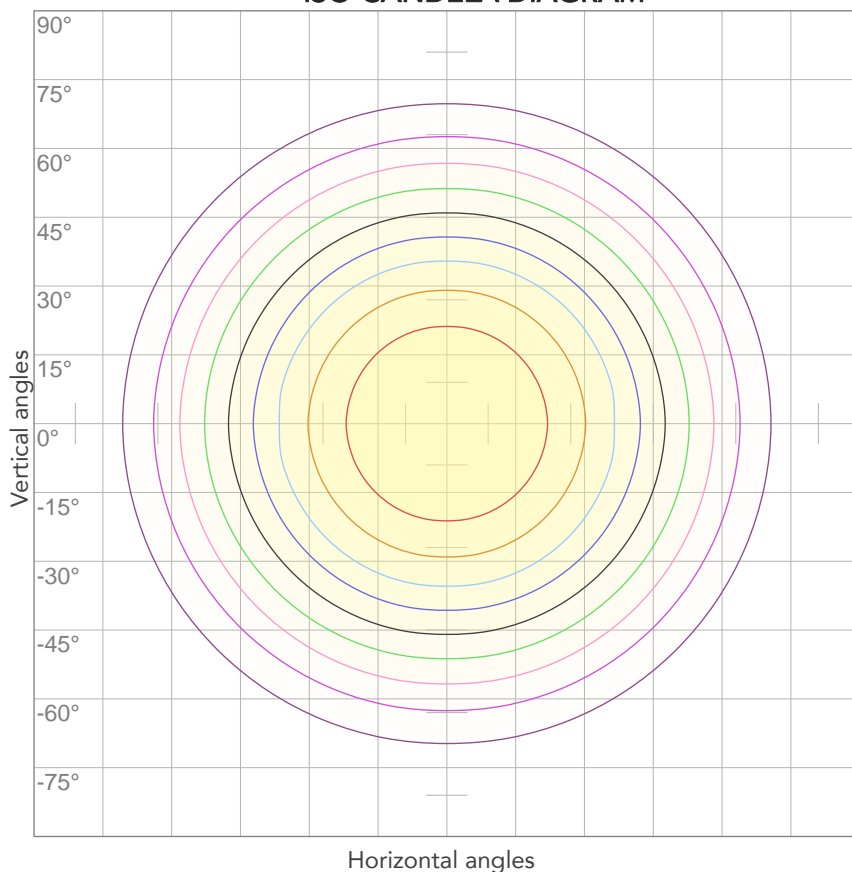


10%	111 cd
20%	222 cd
30%	334 cd
40%	445 cd
50%	556 cd
60%	667 cd
70%	779 cd
80%	890 cd

Conditions:

Number of c-planes: 4

Candela at center: 1112 cd

ISO LUX DIAGRAM

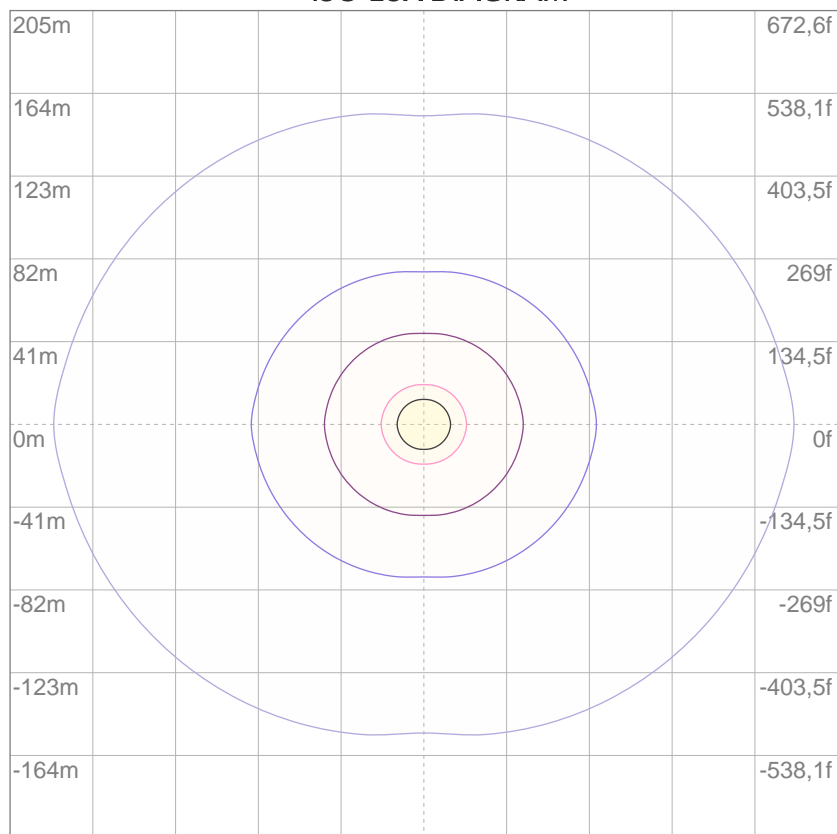

Mounting height: 10 meters (33 feet)

3%	0,334 lx
5%	0,556 lx
10%	1,11 lx
30%	3,34 lx
50%	5,56 lx

Conditions:

Number of c-planes: 4

Lux at center: 11,1 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

2536 lm

Peak candela output:

1688 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter Int.

Target:


Blue

Operator:

Paolo Carvone

Date and time:

18/11/2020 10:44:09

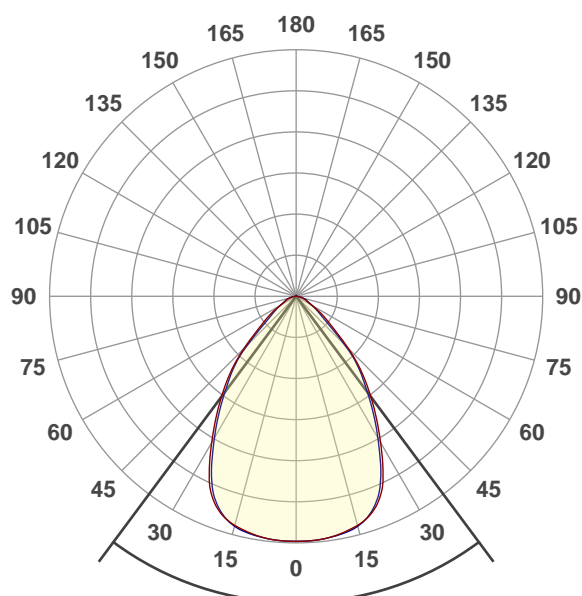


Beam angle 50%: 73,3°

Field angle 10%: 113,9°


Cut off angle 2.5%: 151,8°

Spectra

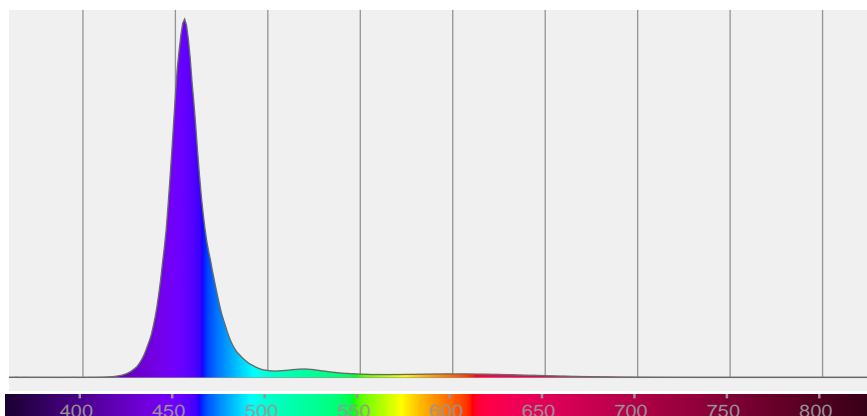

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
73,3°	113,9°	151,8°	93,9%	80,8%

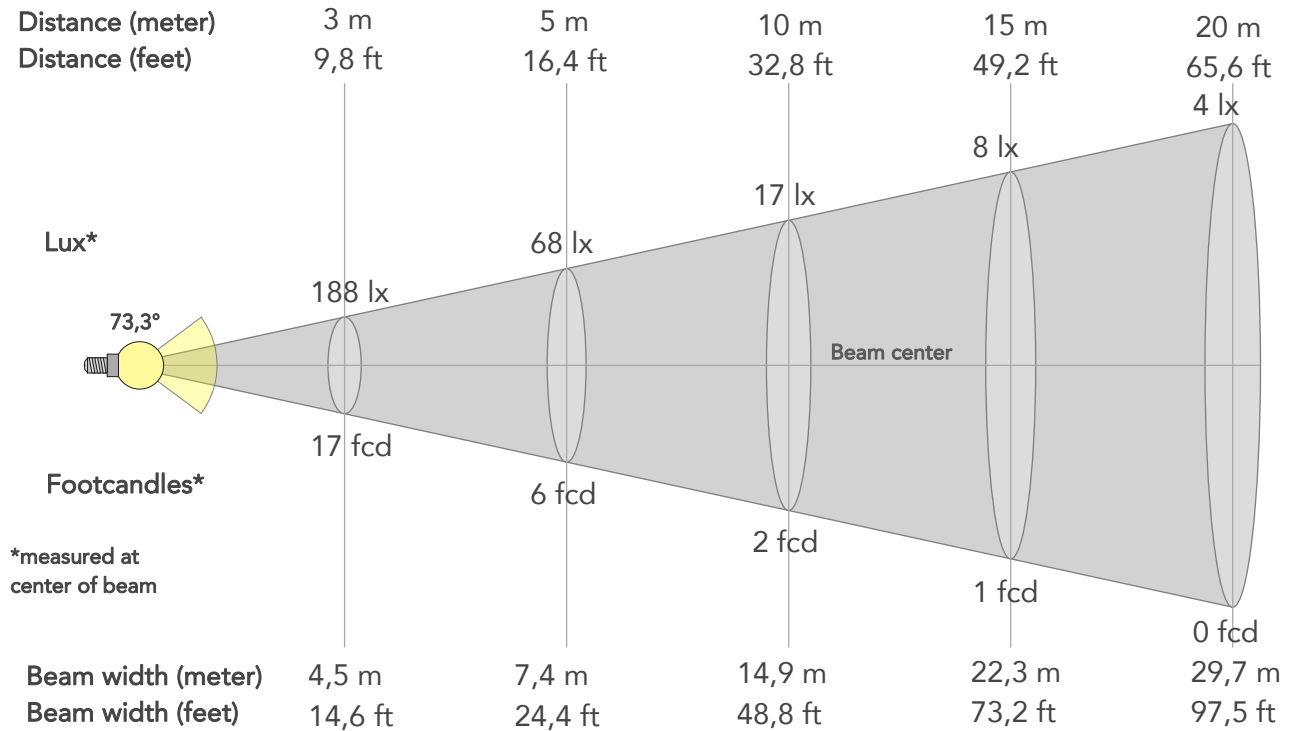

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	1688lx	422lx	188lx	105lx	68lx	30lx	17lx	8lx	4lx	3lx	2lx	1lx	1lx
Footcand.	157fcd	39fcd	17fcd	10fcd	6fcd	3fcd	2fcd	1fcd	0fcd	0fcd	0fcd	0fcd	0fcd
Beam wid.	1,5m	3m	4,5m	5,9m	7,4m	11,2m	14,9m	22,3m	29,7m	37,2m	44,6m	59,5m	74,3m
Beam wid.	4,9ft	9,8ft	14,6ft	19,5ft	24,4ft	36,6ft	48,8ft	73,2ft	97,5ft	121,9ft	146,3ft	195,1ft	243,8ft


LINEAR DISTRIBUTION DIAGRAM

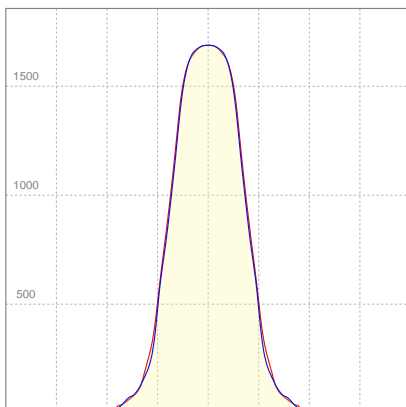

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	0,710A	125,2W	20lm/W
Power FC			
0,78			

ISO CANDELA DIAGRAM

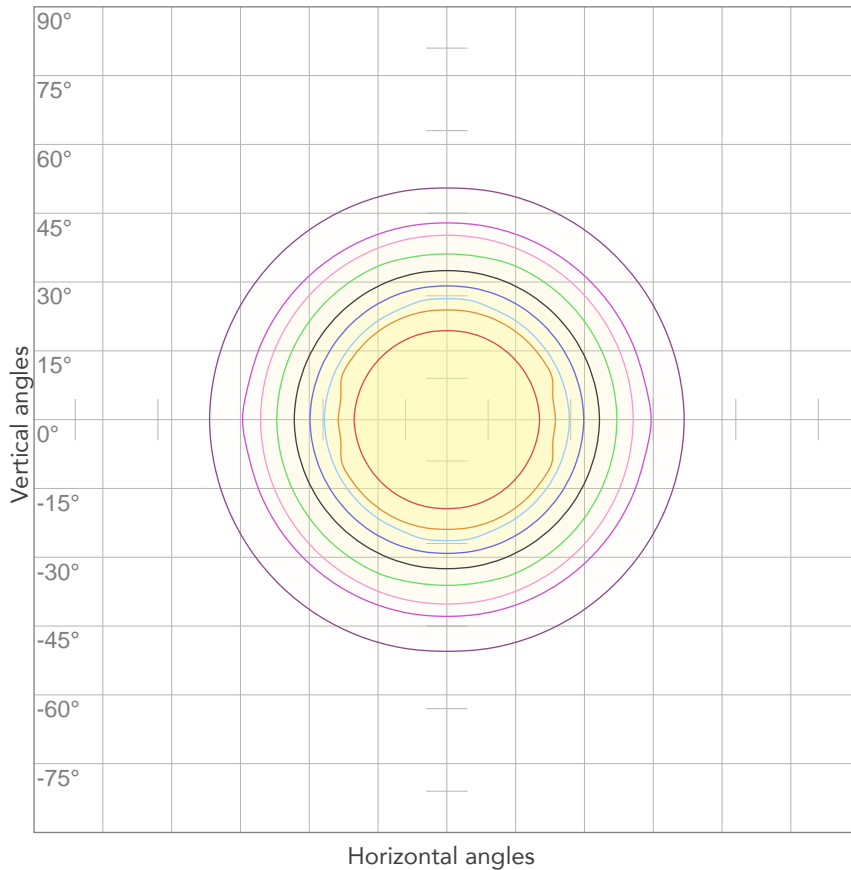


10%	169 cd
20%	338 cd
30%	506 cd
40%	675 cd
50%	844 cd
60%	1013 cd
70%	1181 cd
80%	1350 cd

Conditions:

Number of c-planes: 4

Candela at center: 1688 cd

ISO LUX DIAGRAM

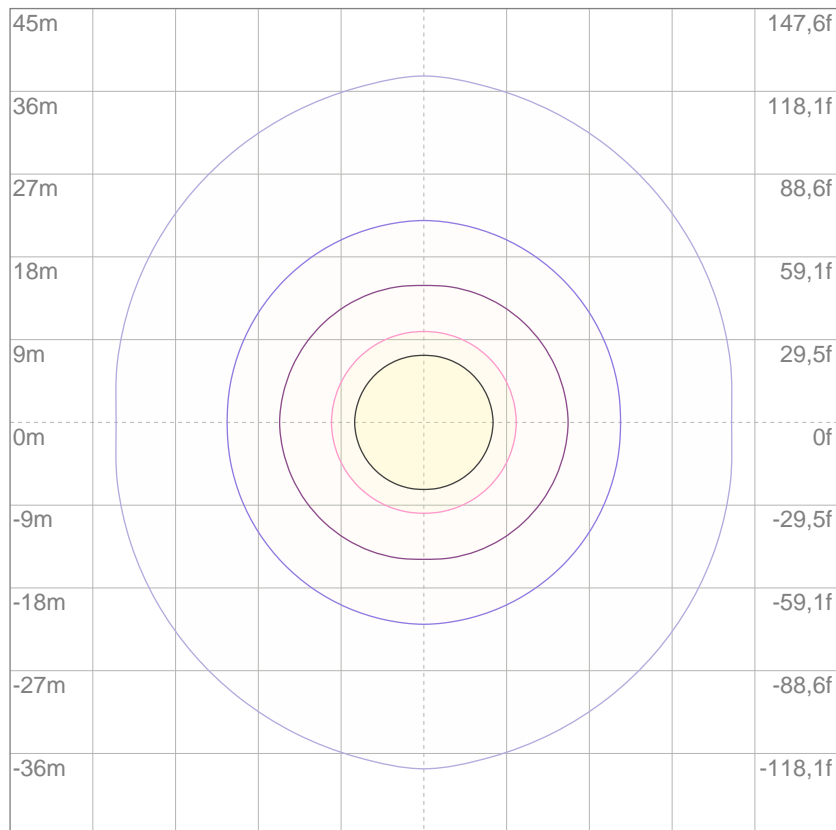

3%	0,506 lx
5%	0,844 lx
10%	1,69 lx
30%	5,06 lx
50%	8,44 lx

Conditions:

Number of c-planes: 4

Lux at center: 16,9 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

27139 lm

Peak candela output:

9376 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter HD

Target:


White

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:58:29

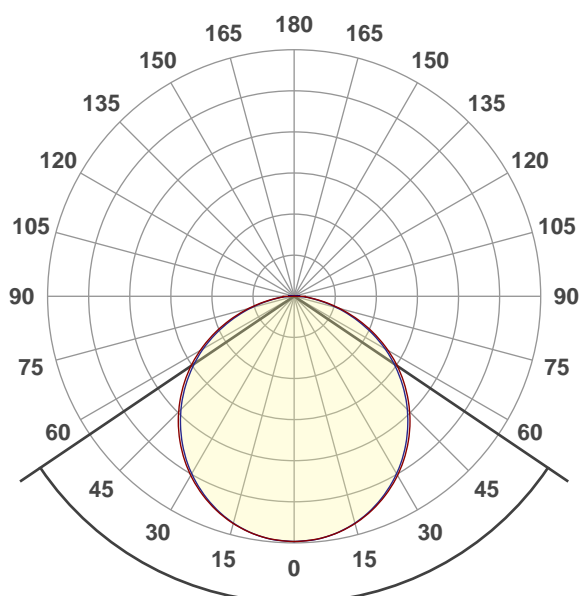


Beam angle 50%: 111,9°

Field angle 10%: 161,9°


Cut off angle 2.5%: 176,9°

Spectra

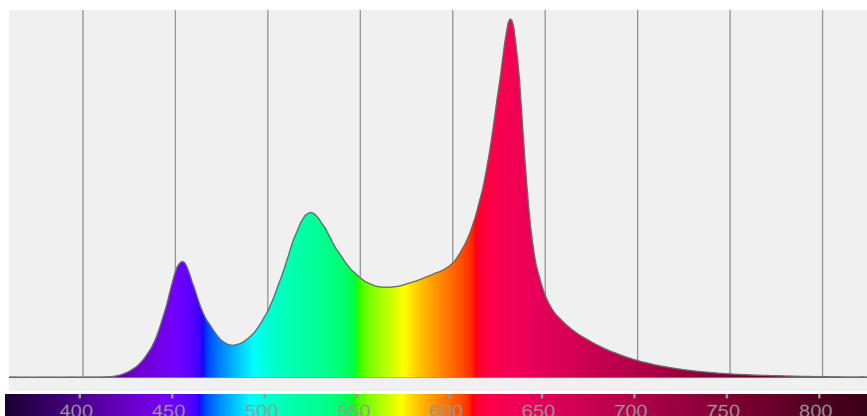

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
111,9°	161,9°	176,9°	77,1%	52,6%

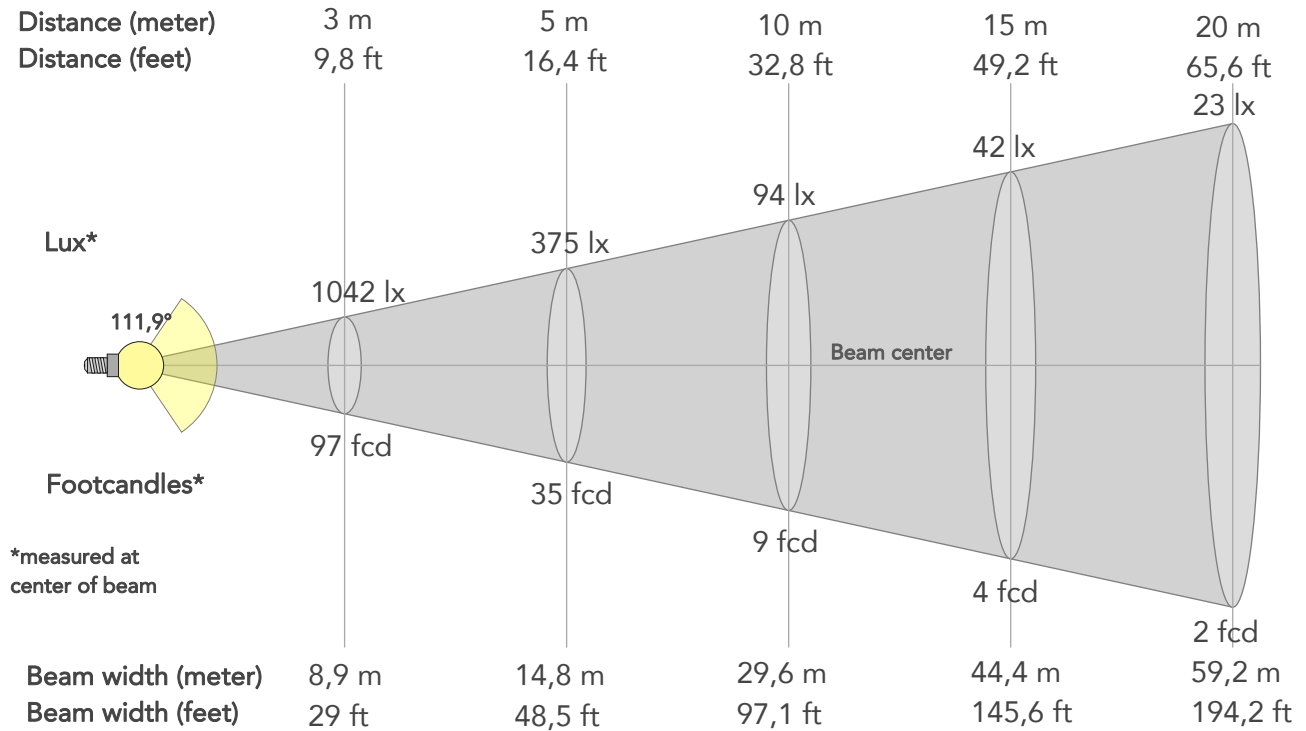

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	9375lx	2344lx	1042lx	586lx	375lx	167lx	94lx	42lx	23lx	15lx	10lx	6lx	4lx
Footcand.	871fcd	218fcd	97fcd	54fcd	35fcd	15fcd	9fcd	4fcd	2fcd	1fcd	1fcd	1fcd	0fcd
Beam wid.	3m	5,9m	8,9m	11,8m	14,8m	22,2m	29,6m	44,4m	59,2m	74m	88,8m	118,4m	148m
Beam wid.	9,8ft	19,5ft	29ft	38,8ft	48,5ft	72,8ft	97,1ft	145,6ft	194,2ft	242,7ft	291,2ft	388,3ft	485,4ft


LINEAR DISTRIBUTION DIAGRAM

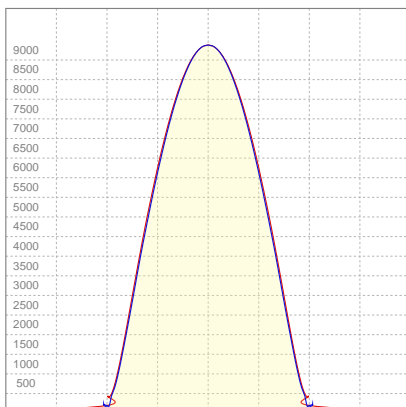

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
223V	2,03A	434,5W	62lm/W

ISO CANDELA DIAGRAM

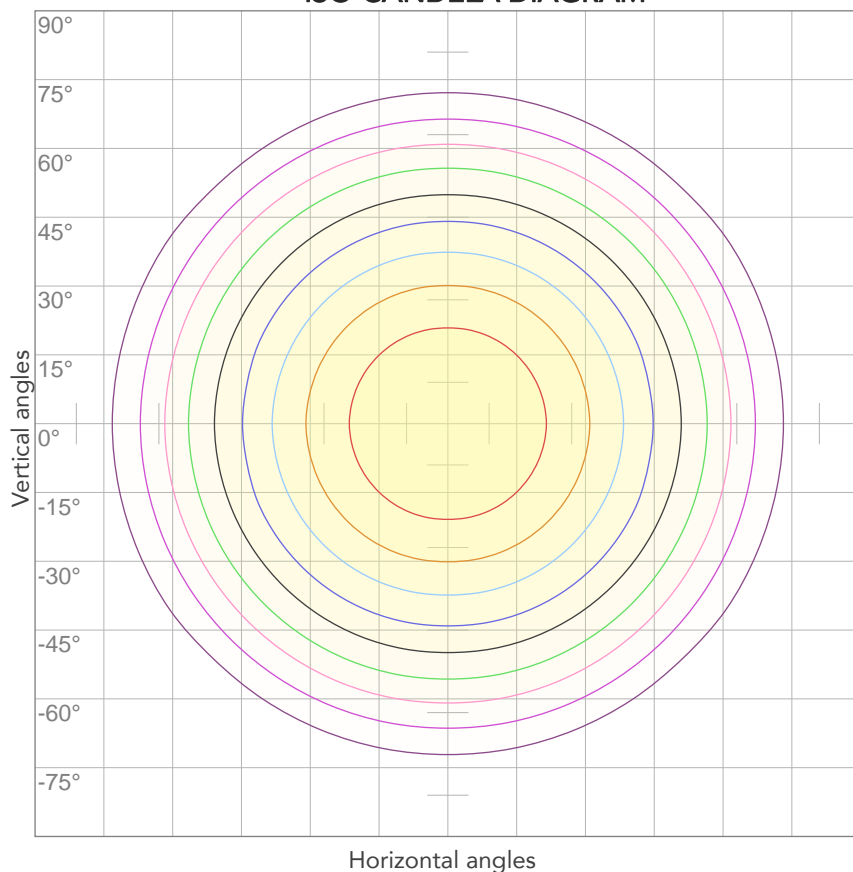


10%	937 cd
20%	1875 cd
30%	2812 cd
40%	3750 cd
50%	4687 cd
60%	5625 cd
70%	6562 cd
80%	7500 cd

Conditions:

Number of c-planes: 4

Candela at center: 9375 cd

ISO LUX DIAGRAM

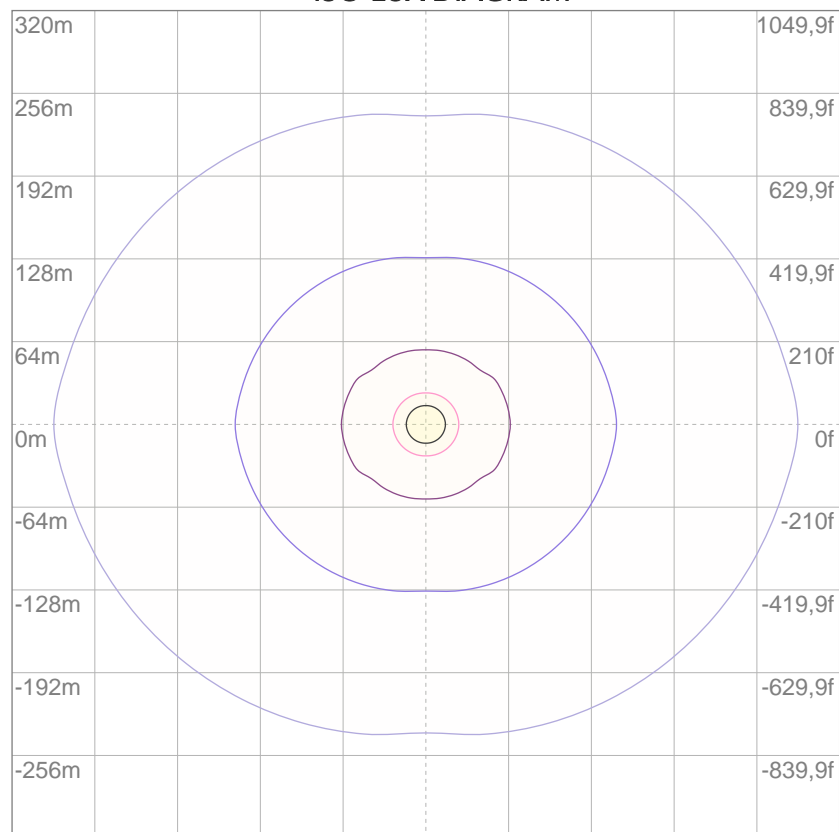

3%	2,81 lx
5%	4,69 lx
10%	9,37 lx
30%	28,1 lx
50%	46,9 lx

Conditions:

Number of c-planes: 4

Lux at center: 93,7 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

32072 lm

Peak candela output:

12295 cd

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter MD

Target:


White

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:22:24

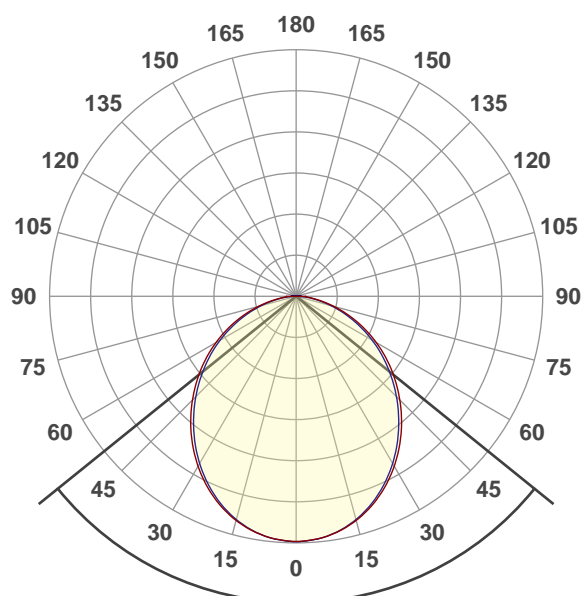


Beam angle 50%: 102,2°

Field angle 10%: 158,7°

Cut off angle 2.5%: 175,5°


Spectra

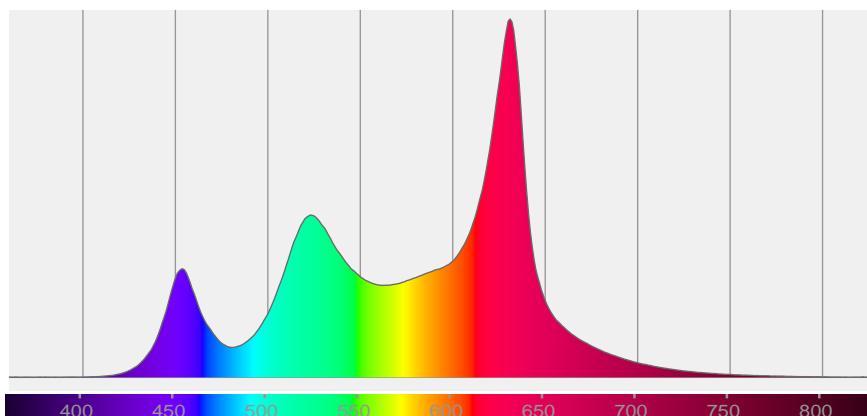

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,2°	158,7°	175,5°	78,9%	55,2%

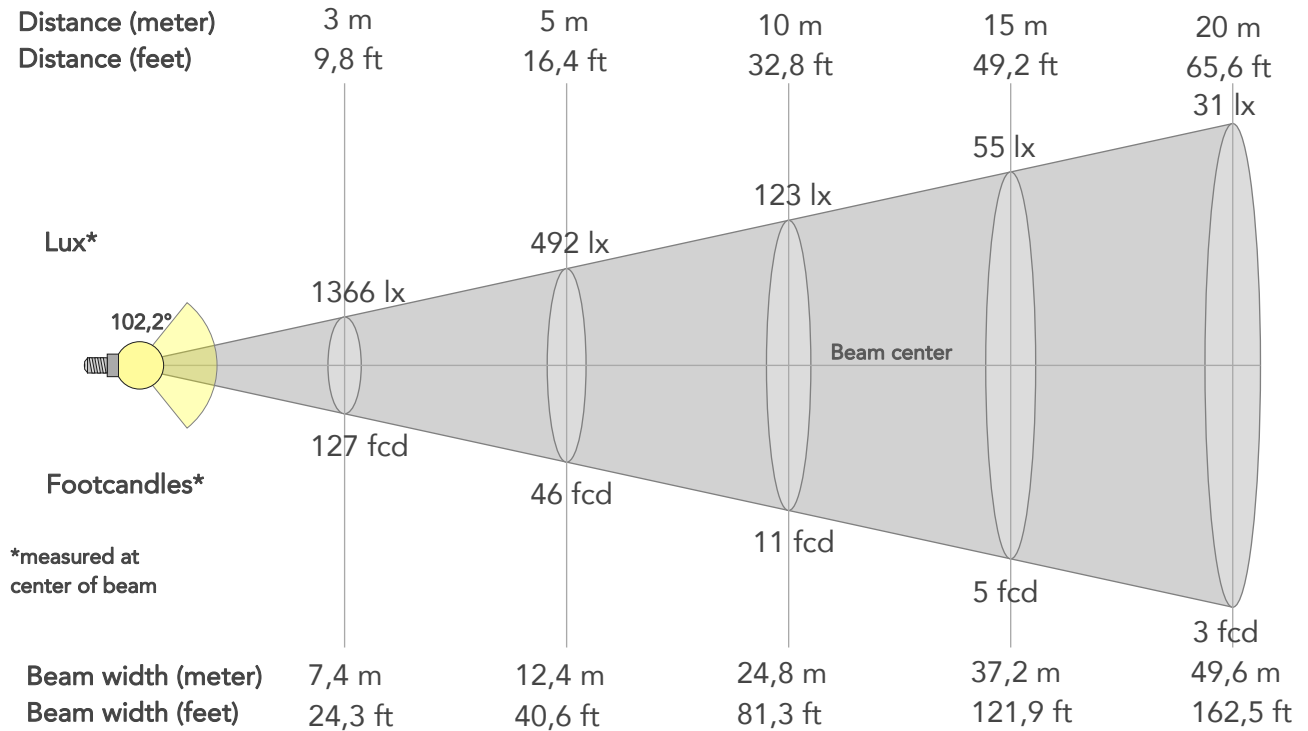

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	12291lx	3073lx	1366lx	768lx	492lx	219lx	123lx	55lx	31lx	20lx	14lx	8lx	5lx
Footcand.	1142fcd	285fcd	127fcd	71fcd	46fcd	20fcd	11fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,4m	9,9m	12,4m	18,6m	24,8m	37,2m	49,6m	61,9m	74,3m	99,1m	123,9m
Beam wid.	8,2ft	16,4ft	24,3ft	32,5ft	40,6ft	61ft	81,3ft	121,9ft	162,5ft	203,2ft	243,8ft	325,1ft	406,3ft


LINEAR DISTRIBUTION DIAGRAM

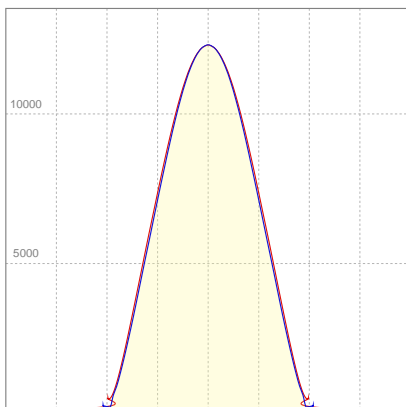

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
222V	2,04A	434,9W	74lm/W

ISO CANDELA DIAGRAM

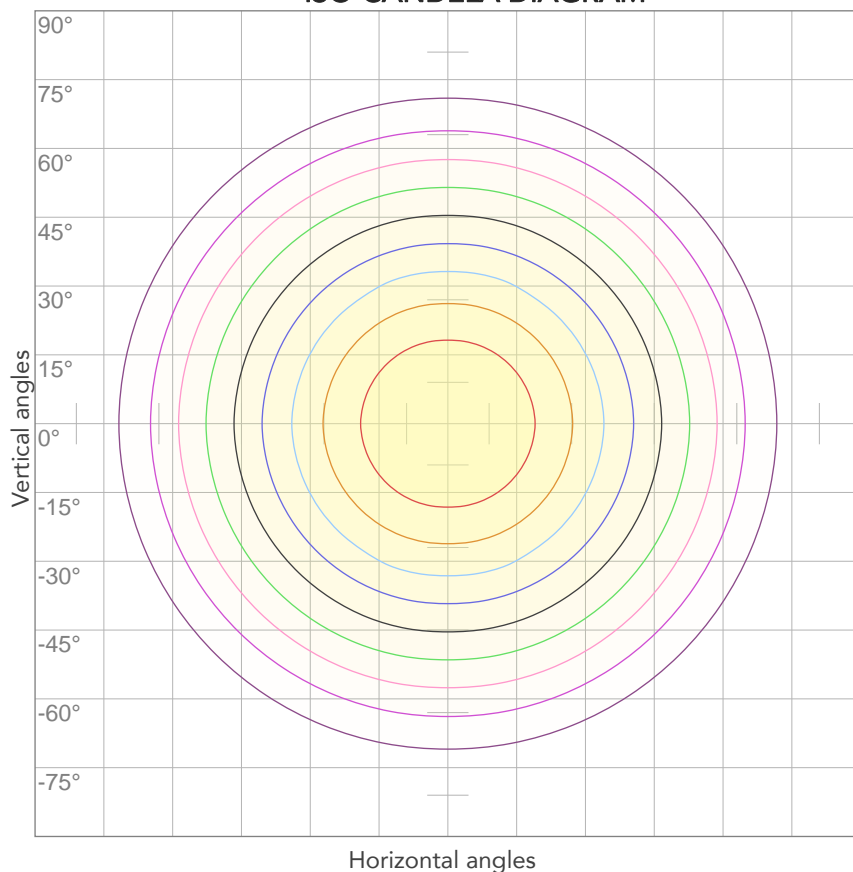


10%	1229 cd
20%	2458 cd
30%	3687 cd
40%	4916 cd
50%	6145 cd
60%	7375 cd
70%	8604 cd
80%	9833 cd

Conditions:

Number of c-planes: 4

Candela at center: 12291 cd

ISO LUX DIAGRAM

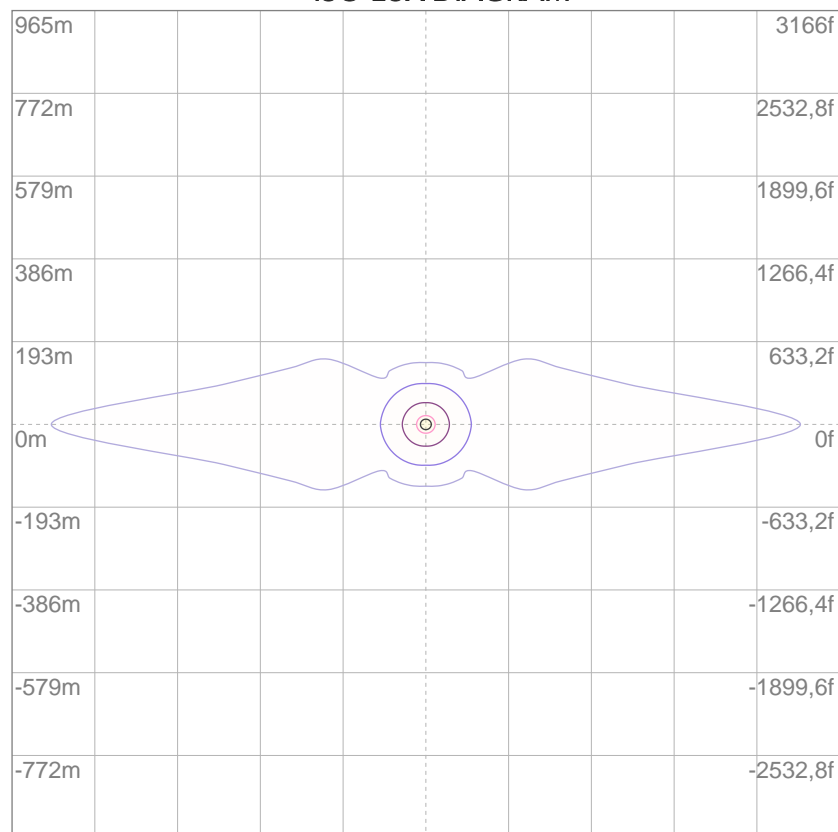

3%	3,69 lx
5%	6,15 lx
10%	12,3 lx
30%	36,9 lx
50%	61,5 lx

Conditions:

Number of c-planes: 4

Lux at center: 123 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

31989 lm

Peak candela output:

12145 cd

PRODUCT NAME:

ECLPANEL TWC

MEASUREMENT CONDITIONS:

Beam angle:

Filter LD

Target:


White

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:16:19

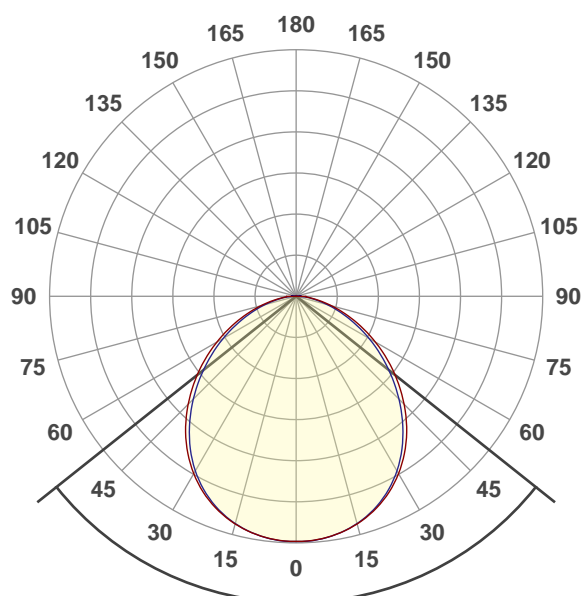


Beam angle 50%: 103°

Field angle 10%: 157,1°

Cut off angle 2.5%: 175,6°


Spectra

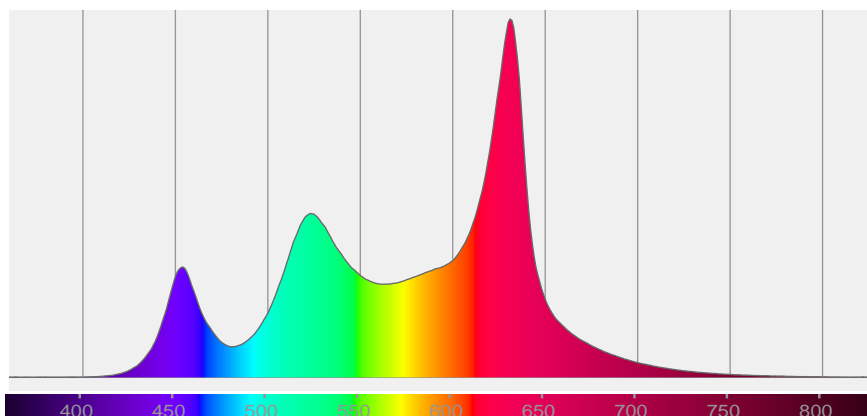

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
103°	157,1°	175,6°	80,3%	56,5%

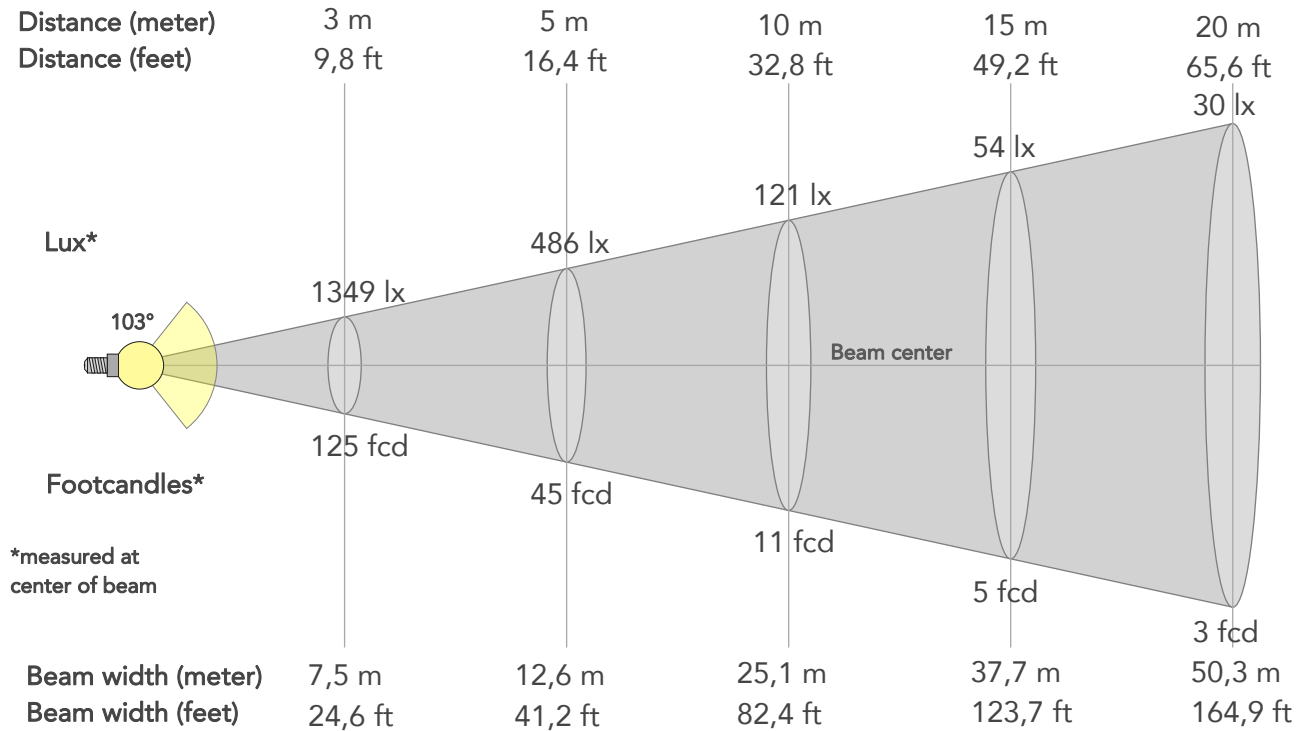

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	12143lx	3036lx	1349lx	759lx	486lx	216lx	121lx	54lx	30lx	19lx	13lx	8lx	5lx
Footcand.	1128fcd	282fcd	125fcd	71fcd	45fcd	20fcd	11fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,5m	10,1m	12,6m	18,8m	25,1m	37,7m	50,3m	62,8m	75,4m	100,5m	125,7m
Beam wid.	8,3ft	16,6ft	24,6ft	32,9ft	41,2ft	61,8ft	82,4ft	123,7ft	164,9ft	206,1ft	247,3ft	329,7ft	412,2ft


LINEAR DISTRIBUTION DIAGRAM

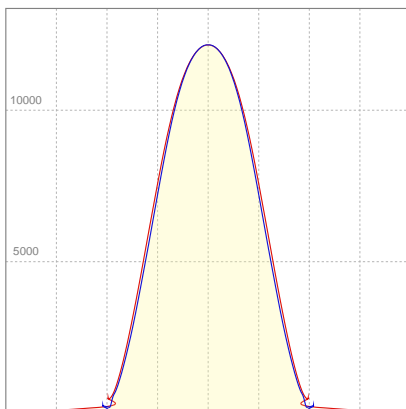

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
223V	2,03A	434,5W	74lm/W

ISO CANDELA DIAGRAM

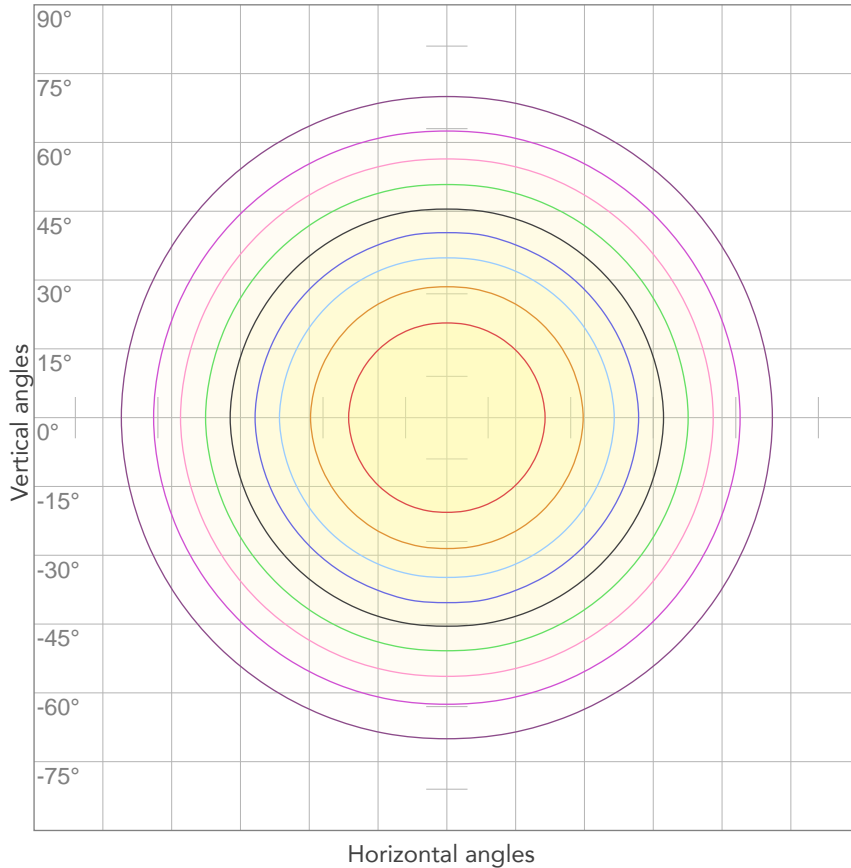


10%	1214 cd
20%	2429 cd
30%	3643 cd
40%	4857 cd
50%	6071 cd
60%	7286 cd
70%	8500 cd
80%	9714 cd

Conditions:

Number of c-planes: 4

Candela at center: 12143 cd

ISO LUX DIAGRAM

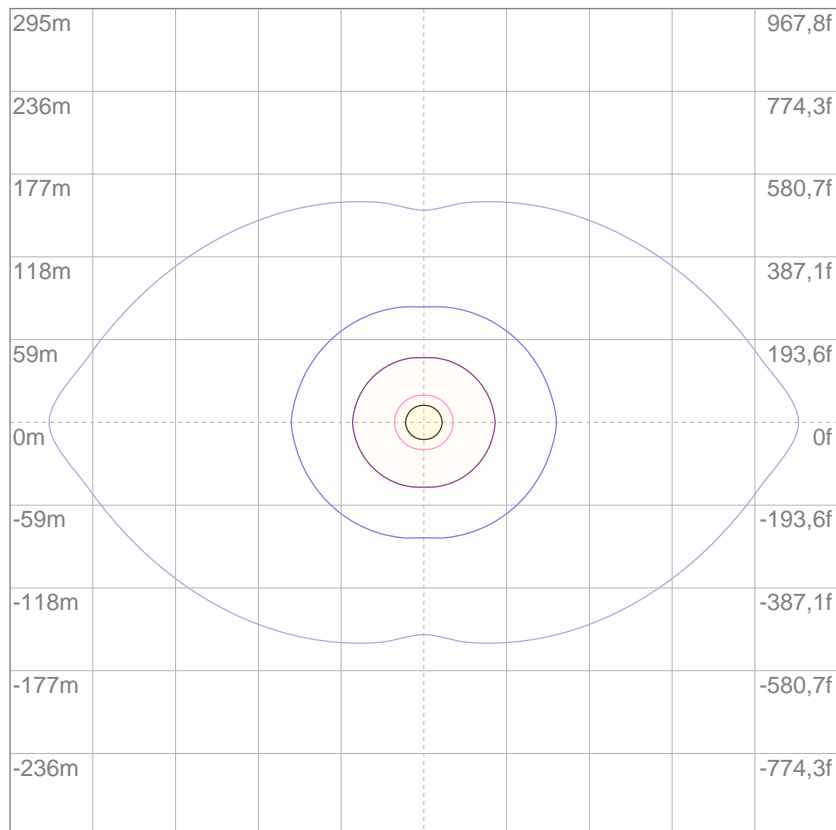

3%	3,64 lx
5%	6,07 lx
10%	12,1 lx
30%	36,4 lx
50%	60,7 lx

Conditions:

Number of c-planes: 4

Lux at center: 121 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

25929 lm

Peak candela output:

16784 cd

PRODUCT NAME:

ECLPANEL TWC

MEASUREMENT CONDITIONS:

Beam angle:

Filter Int.

Target:


White

Operator:

Paolo Carvone

Date and time:

18/11/2020 10:48:04

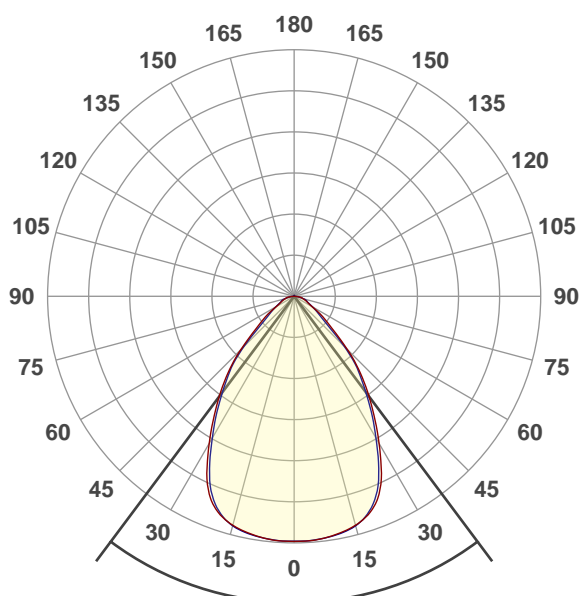


Beam angle 50%: 73,6°

Field angle 10%: 116,1°

Cut off angle 2.5%: 160,7°


Spectra

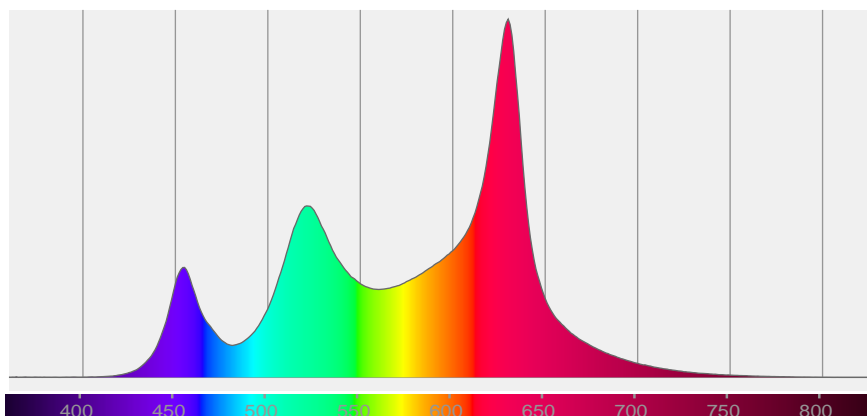

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
73,6°	116,1°	160,7°	92,4%	78,8%

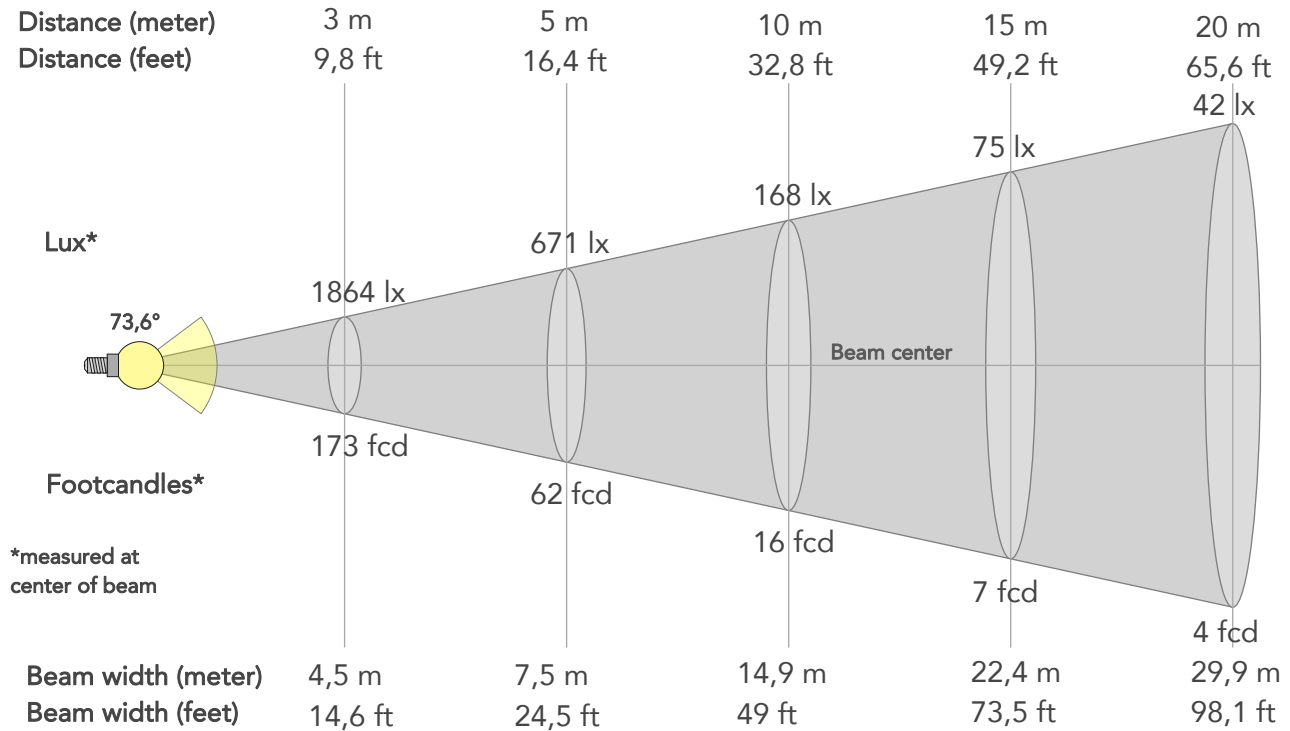

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	16778lx	4194lx	1864lx	1049lx	671lx	298lx	168lx	75lx	42lx	27lx	19lx	10lx	7lx
Footcand.	1559fcd	390fcd	173fcd	97fcd	62fcd	28fcd	16fcd	7fcd	4fcd	2fcd	2fcd	1fcd	1fcd
Beam wid.	1,5m	3m	4,5m	6m	7,5m	11,2m	14,9m	22,4m	29,9m	37,4m	44,8m	59,8m	74,7m
Beam wid.	4,9ft	9,9ft	14,6ft	19,6ft	24,5ft	36,8ft	49ft	73,5ft	98,1ft	122,6ft	147,1ft	196,1ft	245,2ft

LINEAR DISTRIBUTION DIAGRAM

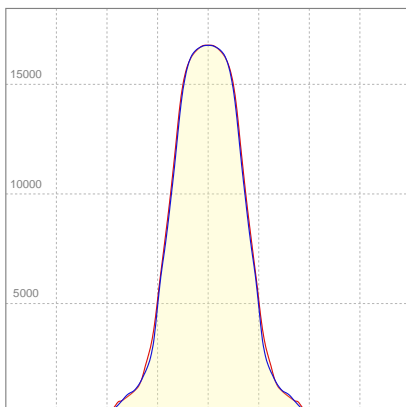


ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
223V	2,03A	436,1W	59lm/W

Power FC
0,96

ISO CANDELA DIAGRAM

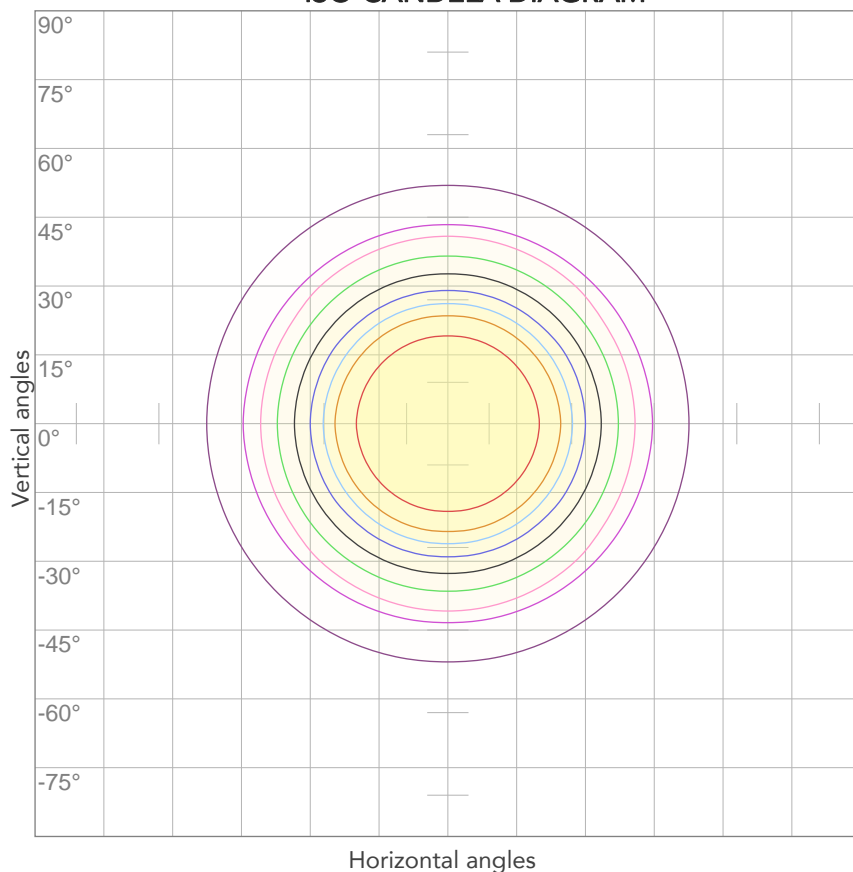


10%	1678 cd
20%	3356 cd
30%	5033 cd
40%	6711 cd
50%	8389 cd
60%	10067 cd
70%	11745 cd
80%	13422 cd

Conditions:

Number of c-planes: 4

Candela at center: 16778 cd

ISO LUX DIAGRAM

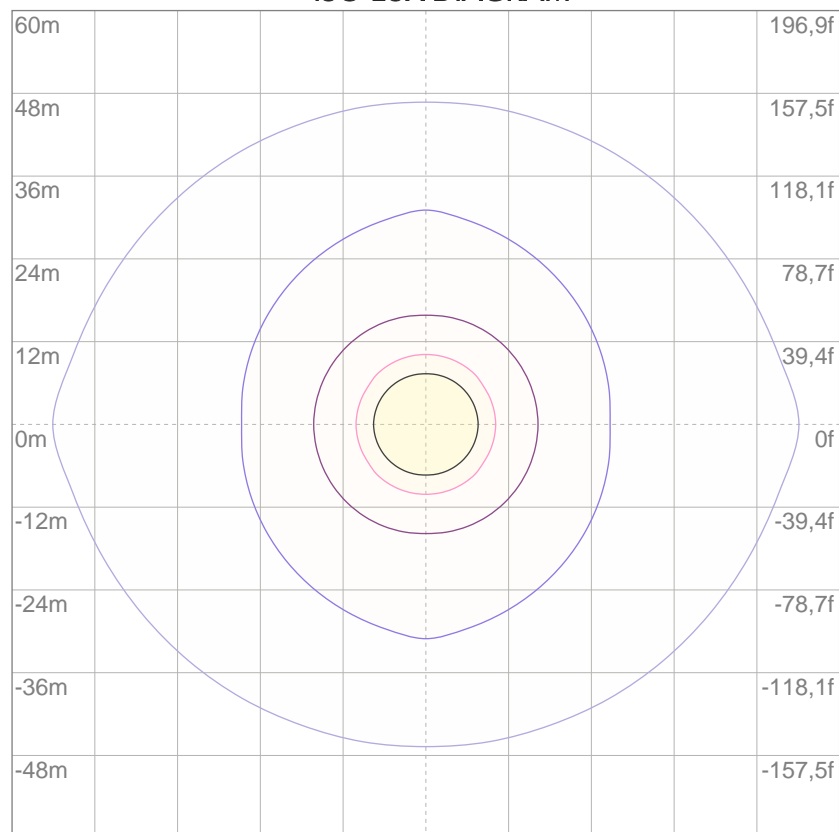

3%	5,03 lx
5%	8,39 lx
10%	16,8 lx
30%	50,3 lx
50%	83,9 lx

Conditions:

Number of c-planes: 4

Lux at center: 168 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

27728 lm

Peak candela output:

10043 cd

Light quality:

CRI: 90,6

Color temperature:

2850 K

PRODUCT NAME:

ECLPANEL TWC

MEASUREMENT CONDITIONS:

Beam angle:

Filter HD

Target:


2800K

Operator:

Paolo Carvone

Date and time:

07/05/2021 11:26:25

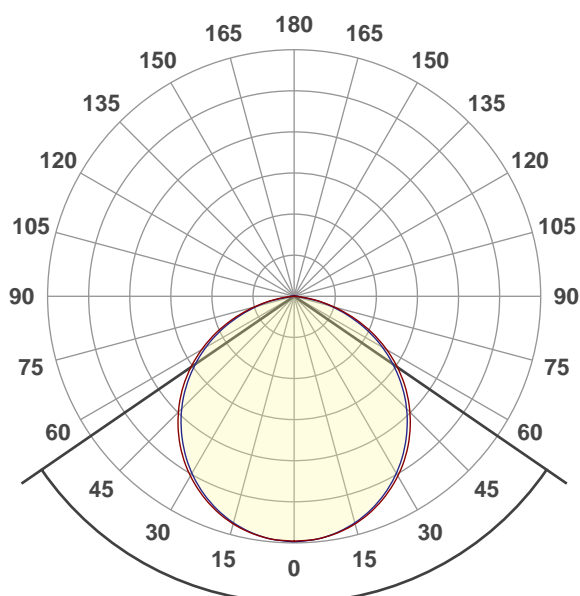




Beam angle 50%: 111°

Field angle 10%: 157,7°


Cut off angle 2.5%: 167,2°

Spectra

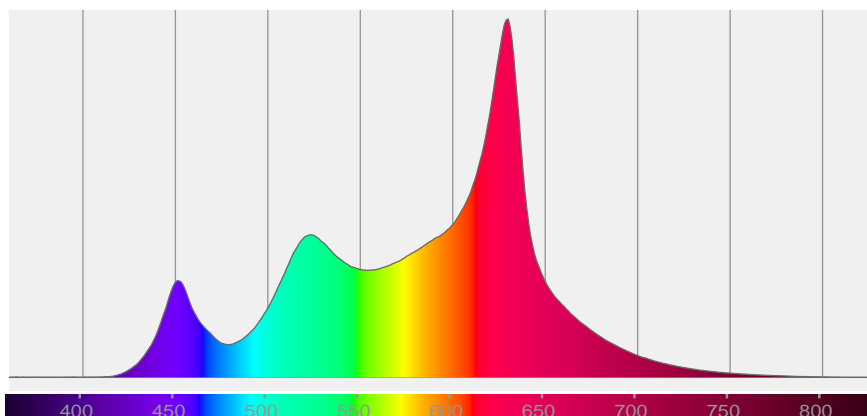


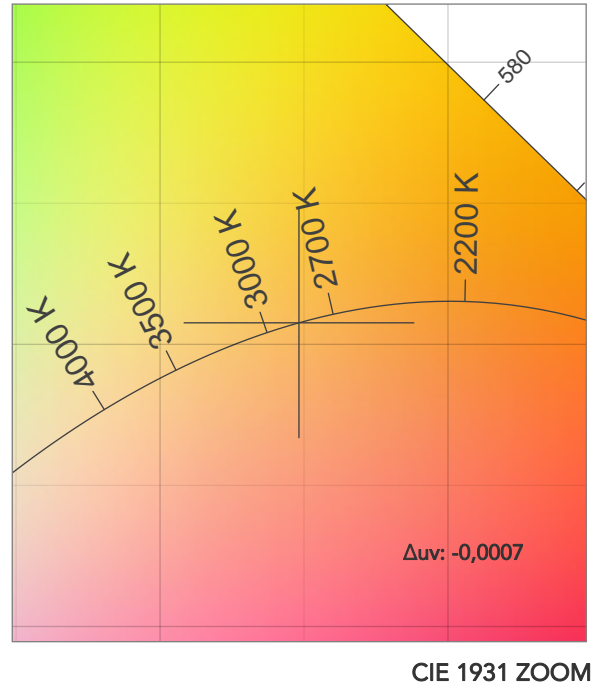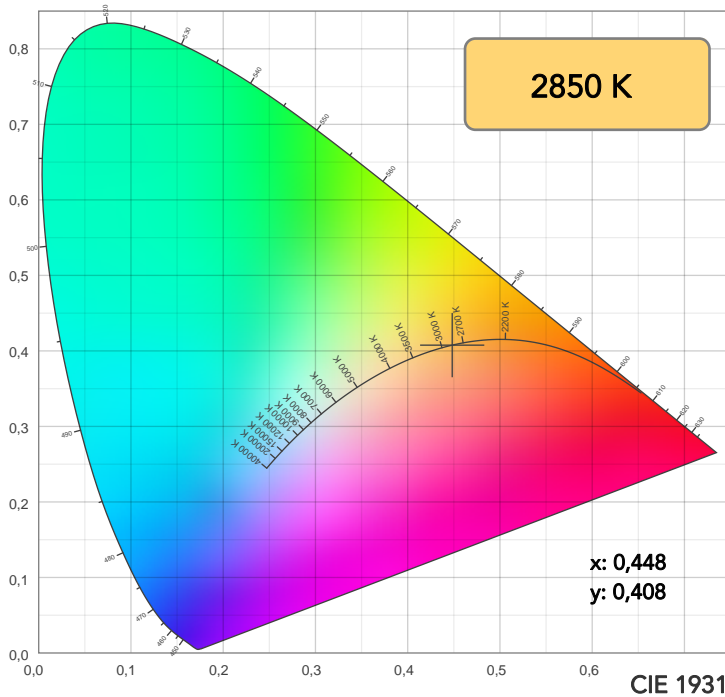

TM30: 90,2

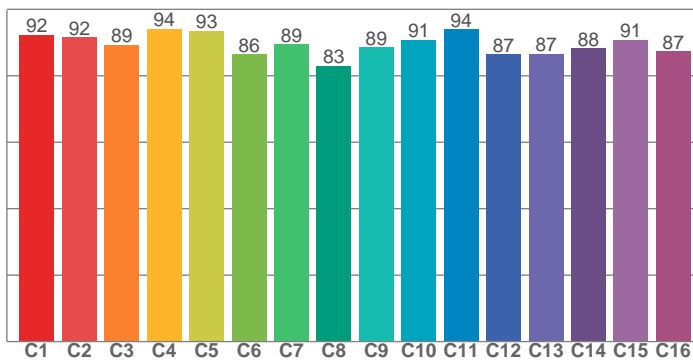

CRI: 90,6 (R1-R8)

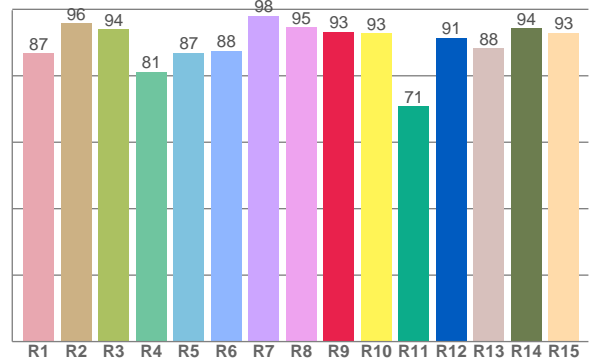

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
86,7	95,9	94,0	81,2	87,0	87,6	98,0	94,6	93,2	92,7	70,8	91,5	88,4	94,3	92,9


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,3	91,5	89,3	94,0	93,5	86,4	89,4	83,0	88,6	90,9	93,9	86,5	86,6	88,2	90,8	87,4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94,4	94,1	97,1	89,3	85,8	84,9	94,1	94,3	95,8	96,6	89,4	88,4	90,4	93,4	95,5

CQS: 91,2

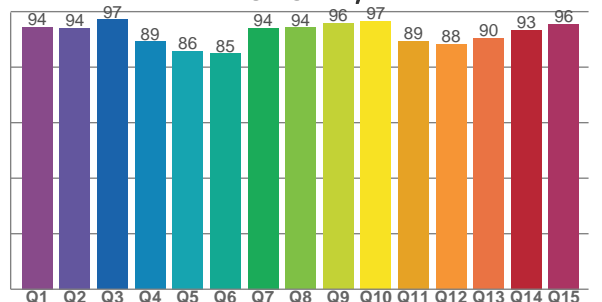

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
2850 K	90,6	93,2	90,2	105,6	91,2	78	0,448	0,408	-0,0007

TM30 DETAILS

Rf 90,2
Fidelity index Rf

Rg 105,6
Gammut index


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	1%	-1%
2	92	2%	-2%
3	89	2%	-2%
4	94	-1%	-2%
5	93	1%	3%
6	86	6%	6%
7	89	5%	2%
8	83	10%	-2%
9	89	5%	-3%
10	91	3%	-4%
11	94	2%	-2%
12	87	4%	-6%
13	87	2%	-9%
14	88	2%	-6%
15	91	1%	1%
16	87	2%	-8%

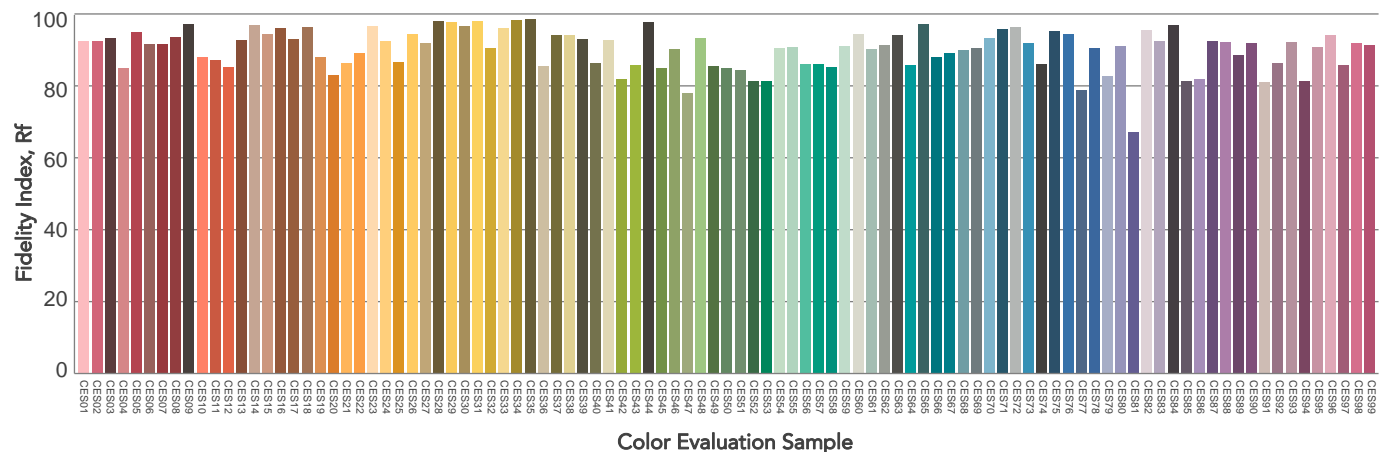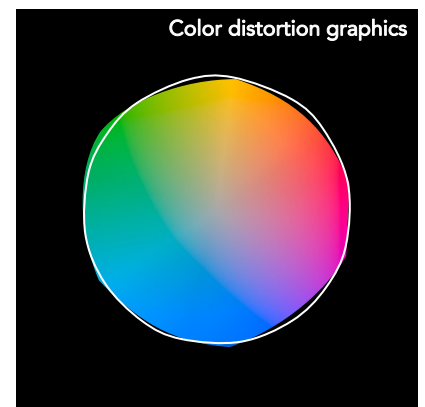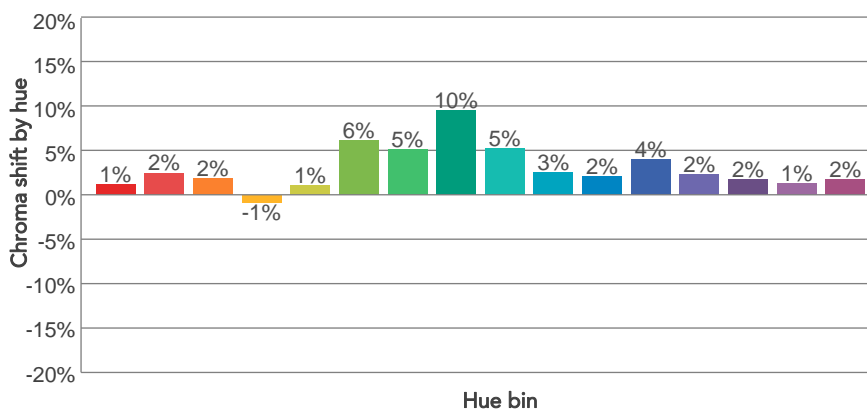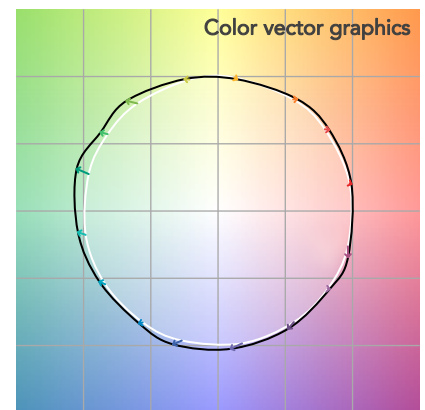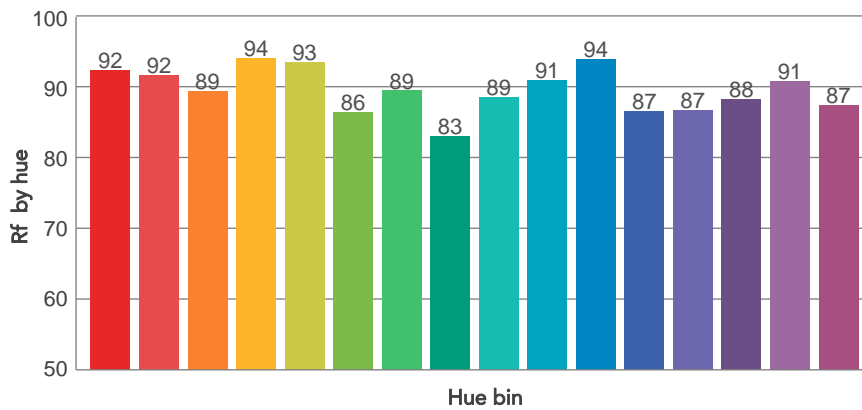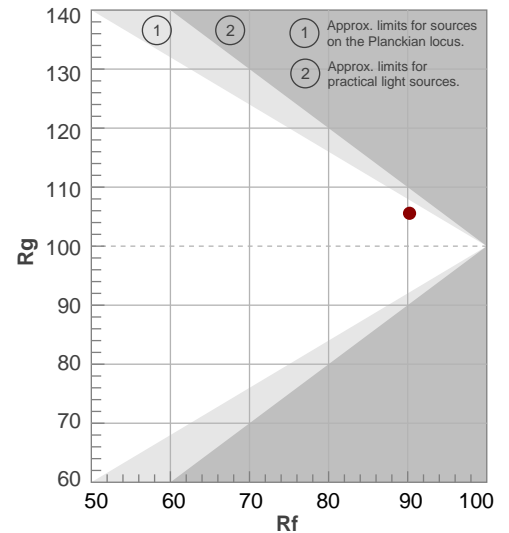

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
111°	157,7°	167,2°	80,6%	55,1%

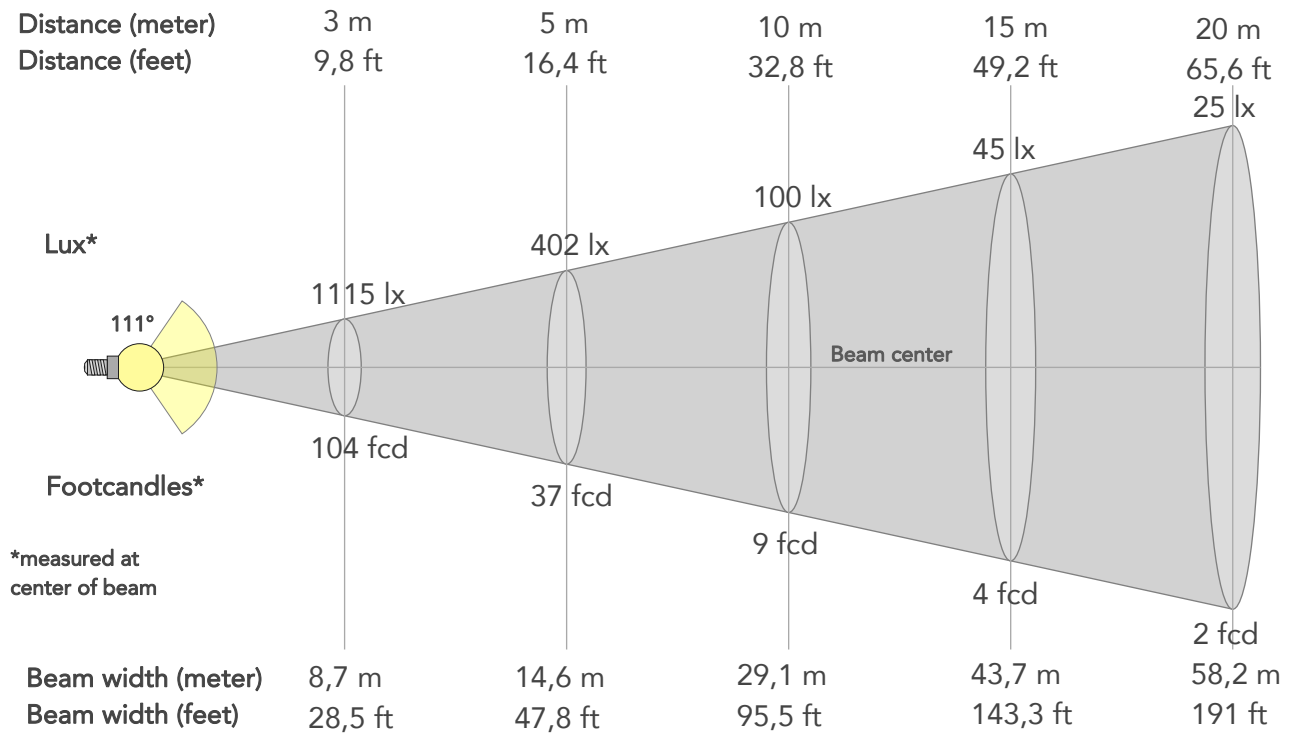

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	10038lx	2509lx	1115lx	627lx	402lx	178lx	100lx	45lx	25lx	16lx	11lx	6lx	4lx
Footcand.	933fcd	233fcd	104fcd	58fcd	37fcd	17fcd	9fcd	4fcd	2fcd	1fcd	1fcd	1fcd	0fcd
Beam wid.	2,9m	5,8m	8,7m	11,6m	14,6m	21,8m	29,1m	43,7m	58,2m	72,8m	87,4m	116,5m	145,6m
Beam wid.	9,6ft	19,2ft	28,5ft	38,1ft	47,8ft	71,6ft	95,5ft	143,3ft	191ft	238,8ft	286,5ft	382ft	477,5ft


LINEAR DISTRIBUTION DIAGRAM

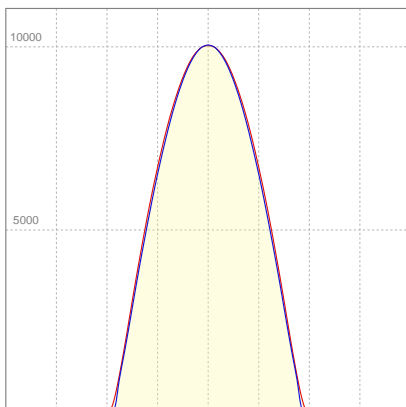

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
226V	2,07A	446,7W	62lm/W

ISO CANDELA DIAGRAM

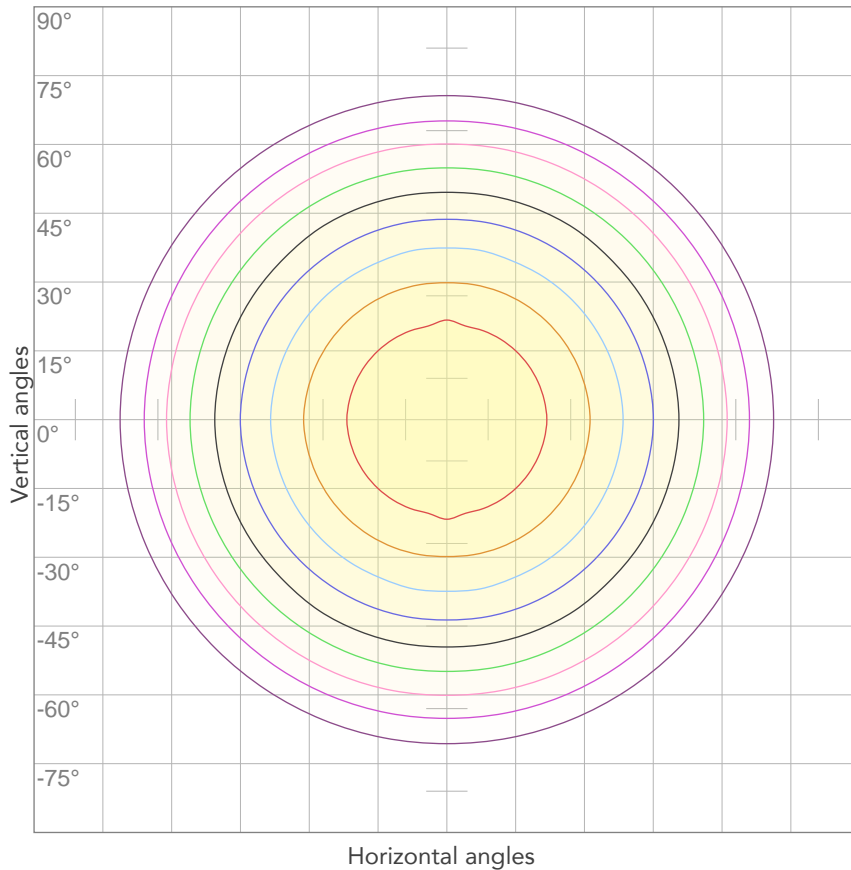


10%	1004 cd
20%	2008 cd
30%	3011 cd
40%	4015 cd
50%	5019 cd
60%	6023 cd
70%	7027 cd
80%	8030 cd

Conditions:

Number of c-planes: 4

Candela at center: 10038 cd

ISO LUX DIAGRAM

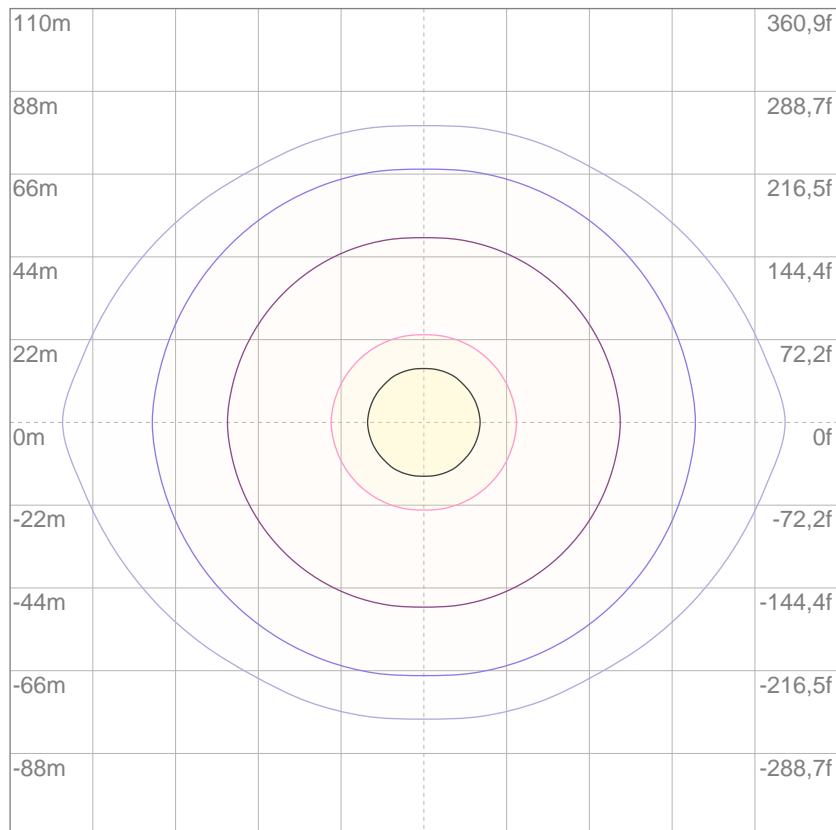

3%	3,01 lx
5%	5,02 lx
10%	10,0 lx
30%	30,1 lx
50%	50,2 lx

Conditions:

Number of c-planes: 4

Lux at center: 100 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

31236 lm

Peak candela output:

12497 cd

Light quality:

CRI: 92,4

Color temperature:

2850 K

PRODUCT NAME:

ECLPANEL TWC

MEASUREMENT CONDITIONS:

Beam angle:

Filter MD

Target:


2800K

Operator:

Paolo Carvone

Date and time:

07/05/2021 13:08:59

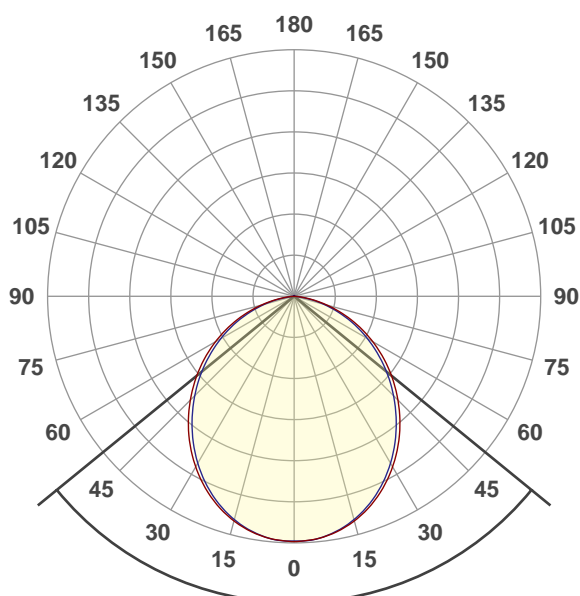




Beam angle 50%: 101,6°

Field angle 10%: 154,6°


Cut off angle 2.5%: 166,5°

Spectra

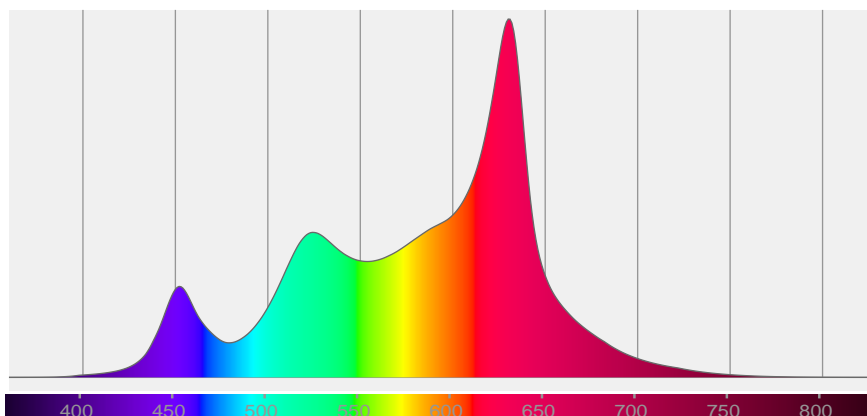


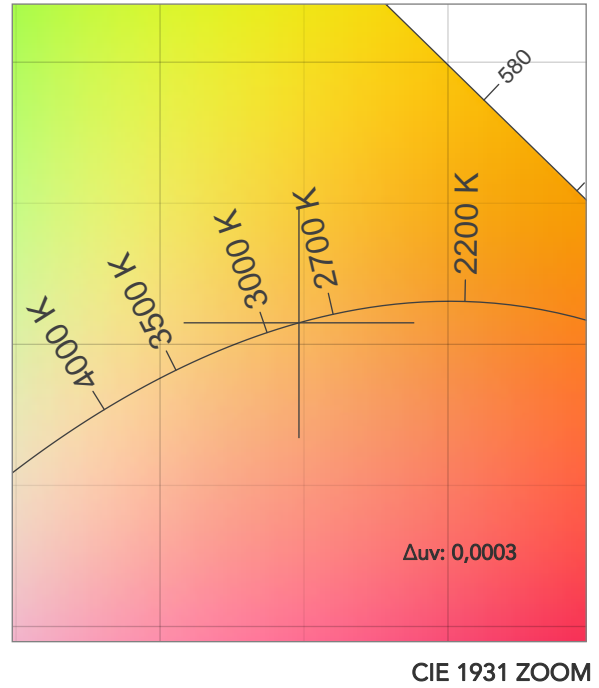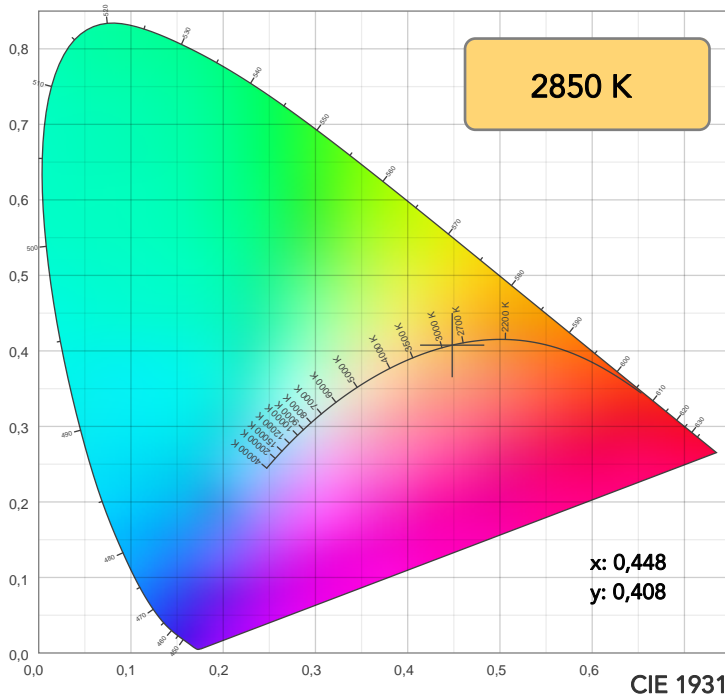

TM30: 91,3

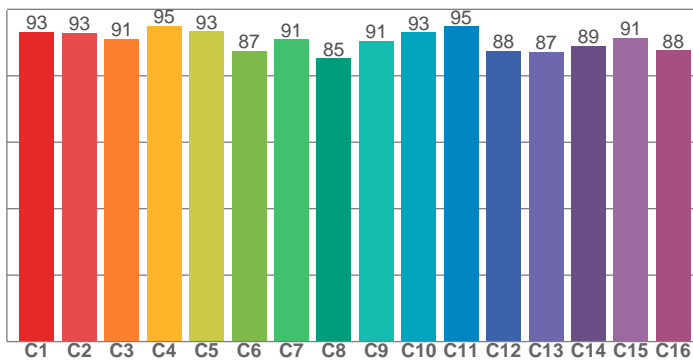

CRI: 92,4 (R1-R8)

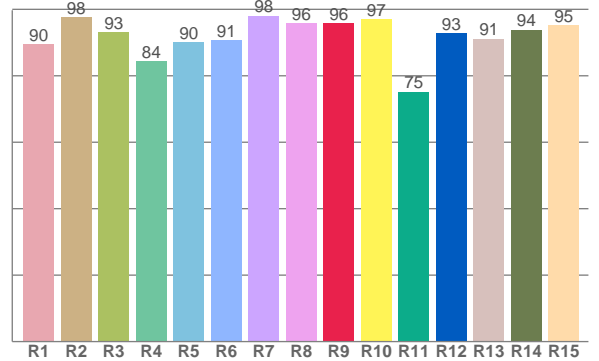

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
89,6	97,6	93,0	84,3	90,0	90,7	98,1	95,9	95,9	96,9	75,2	92,8	91,2	93,8	95,3


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93,1	92,9	91,1	95,0	93,3	87,4	90,9	85,2	90,5	93,1	94,9	87,5	87,2	89,0	91,5	87,7

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94,2	94,1	96,3	91,7	87,9	86,2	93,8	95,0	95,6	97,3	90,6	89,7	91,2	94,4	96,0

CQS: 92,1





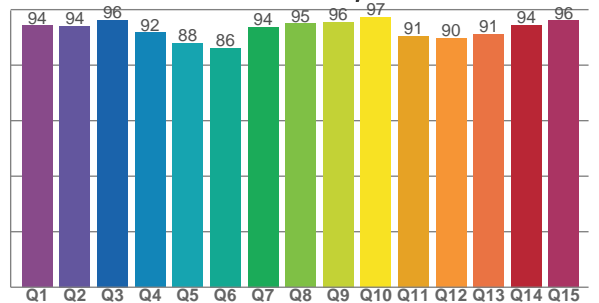


COLOR PARAMETERS

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
2850 K	92,4	95,9	91,3	104,7	92,1	82	0,448	0,408	0,0003

Gammut index


		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	93	1%	-1%
2	93	2%	-2%
3	91	1%	-1%
4	95	-1%	-2%
5	93	1%	4%
6	87	6%	5%
7	91	4%	1%
8	85	8%	-2%
9	91	4%	-3%
10	93	2%	-3%
11	95	2%	0%
12	88	4%	-5%
13	87	2%	-9%
14	89	2%	-6%
15	91	1%	0%
16	88	1%	-8%

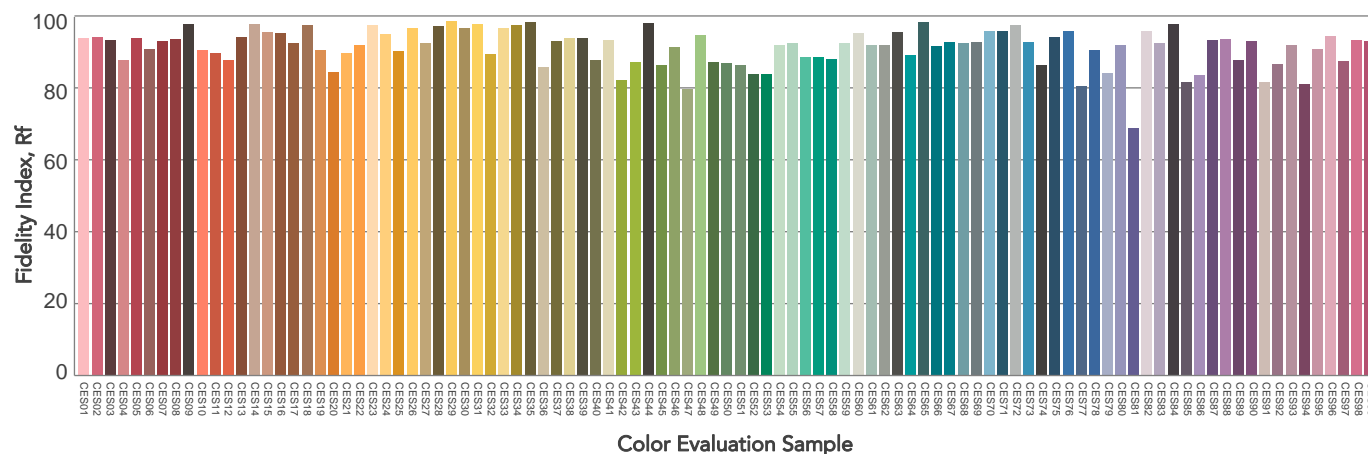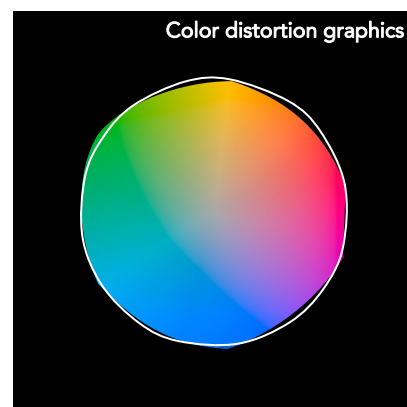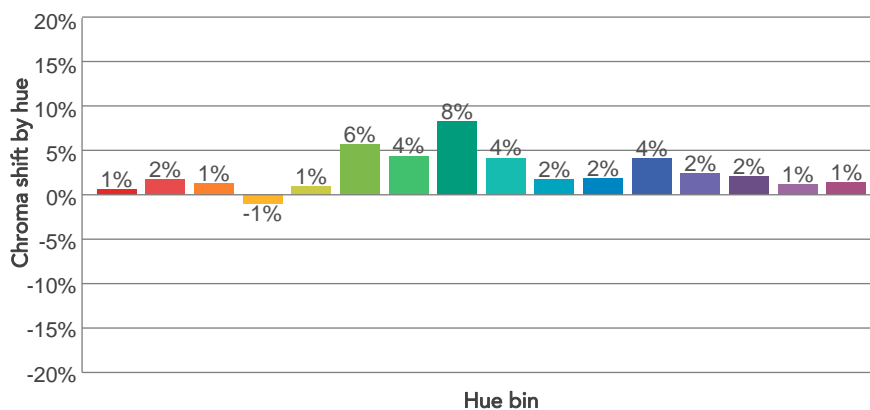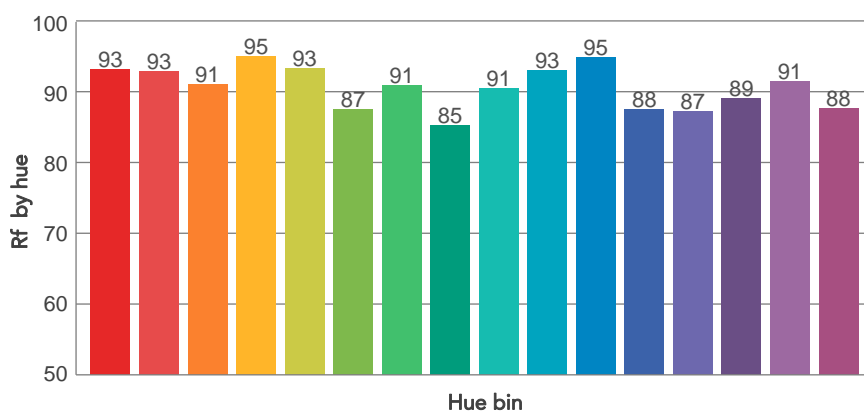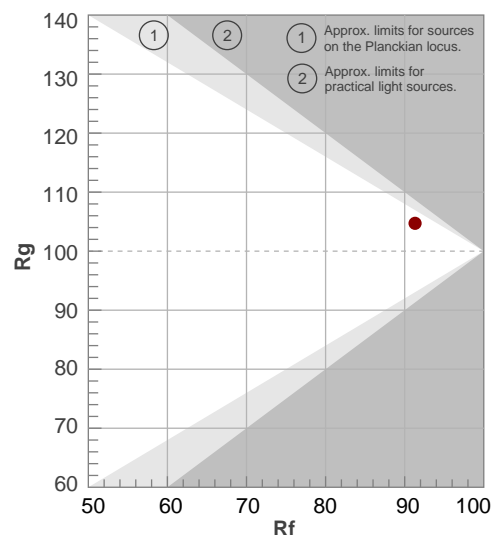

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
101,6°	154,6°	166,5°	82,0%	57,6%

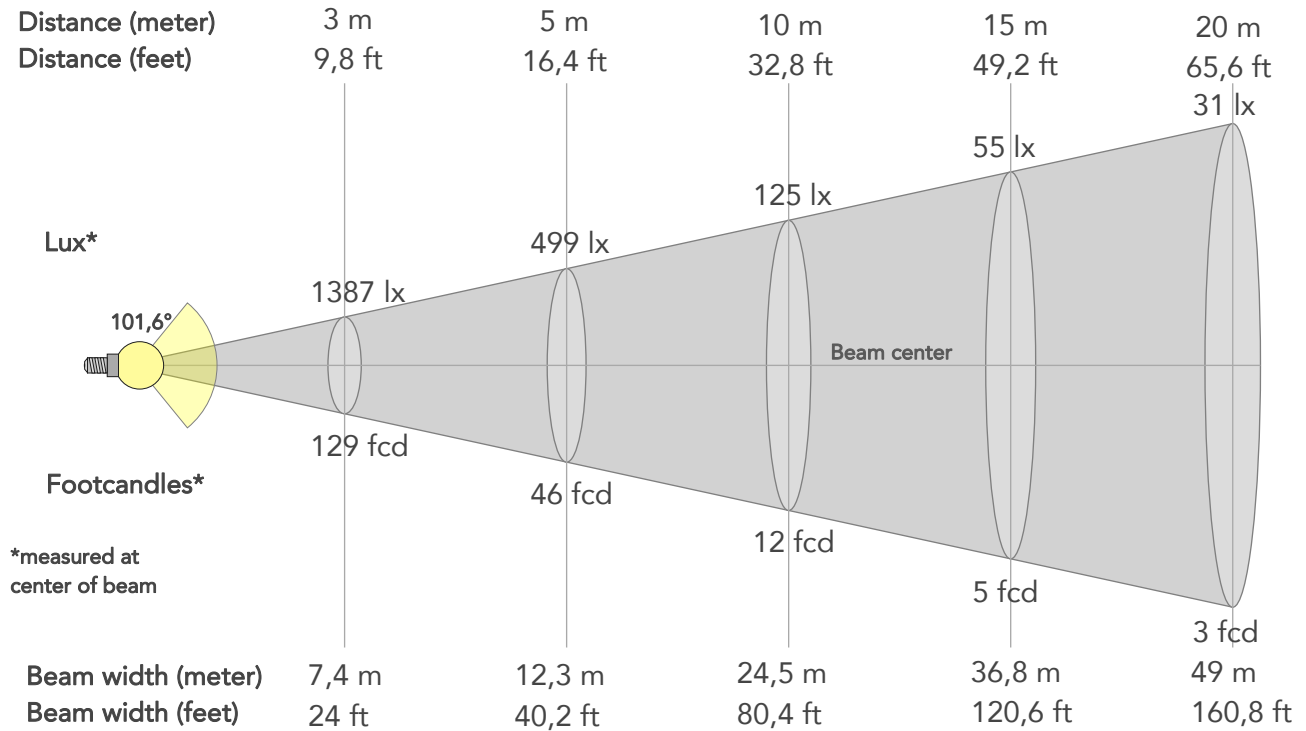

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	12485lx	3121lx	1387lx	780lx	499lx	222lx	125lx	55lx	31lx	20lx	14lx	8lx	5lx
Footcand.	1160fcd	290fcd	129fcd	72fcd	46fcd	21fcd	12fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	4,9m	7,4m	9,8m	12,3m	18,4m	24,5m	36,8m	49m	61,3m	73,5m	98m	122,6m
Beam wid.	8,1ft	16,2ft	24ft	32,1ft	40,2ft	60,3ft	80,4ft	120,6ft	160,8ft	201ft	241,2ft	321,6ft	402ft


LINEAR DISTRIBUTION DIAGRAM

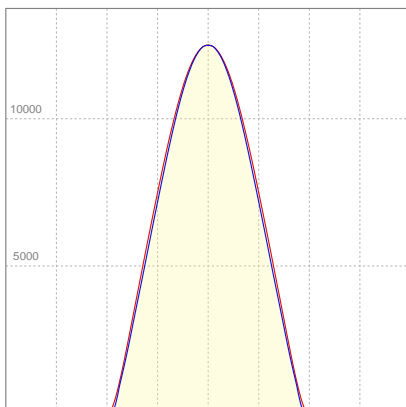

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
226V	2,04A	440,7W	71lm/W

ISO CANDELA DIAGRAM

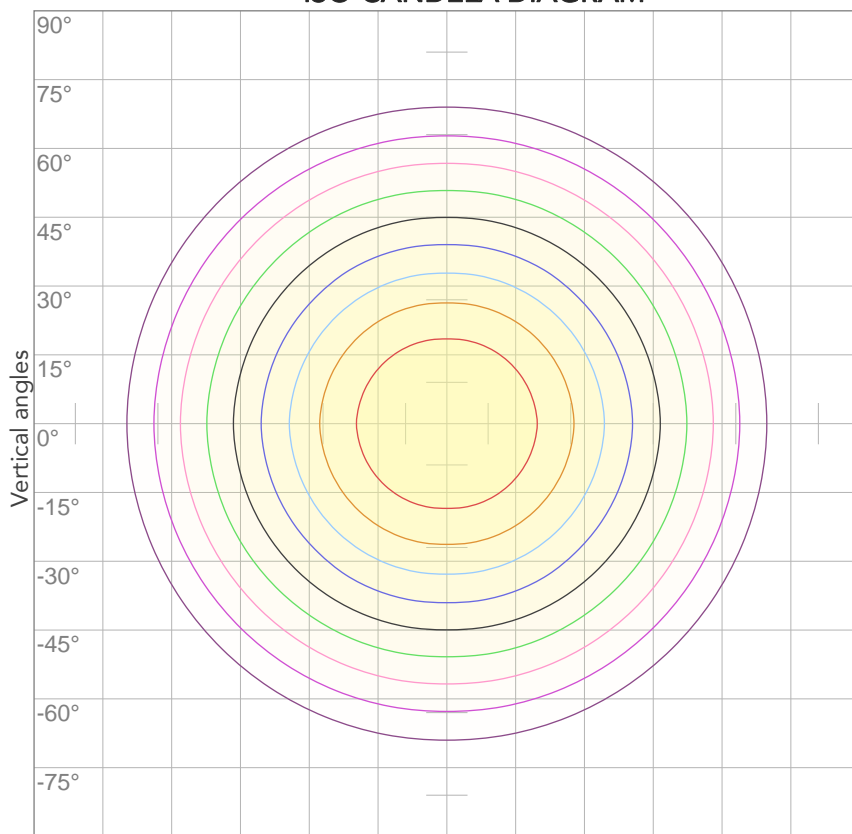


10%	1249 cd
20%	2497 cd
30%	3746 cd
40%	4994 cd
50%	6243 cd
60%	7491 cd
70%	8740 cd
80%	9988 cd

Conditions:

Number of c-planes: 4

Candela at center: 12485 cd

ISO LUX DIAGRAM

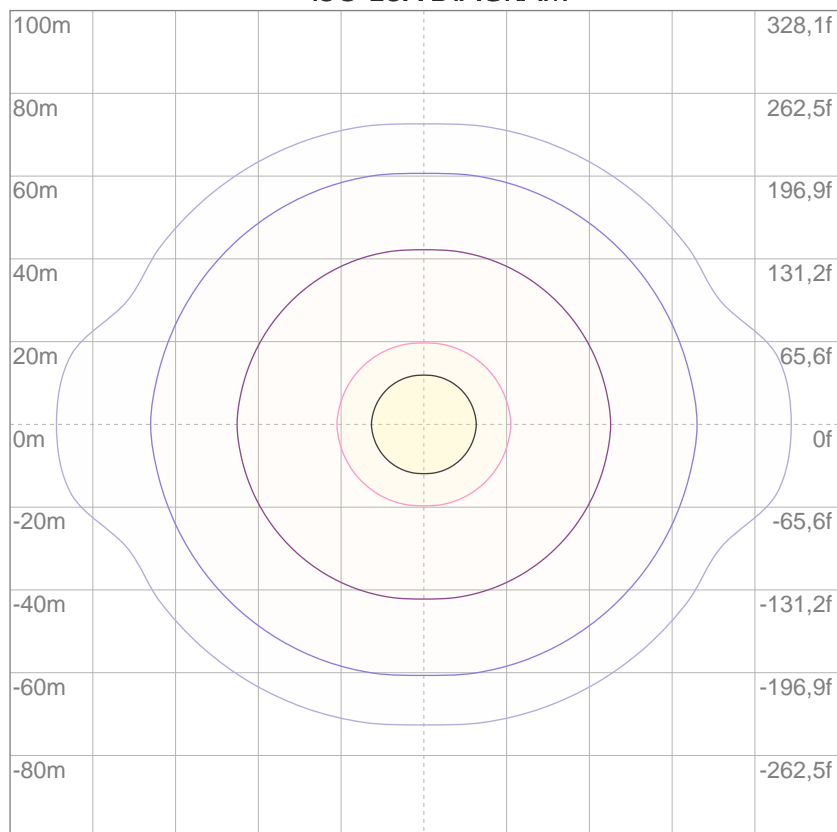

3%	3,75 lx
5%	6,24 lx
10%	12,5 lx
30%	37,5 lx
50%	62,4 lx

Conditions:

Number of c-planes: 4

Lux at center: 125 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

34365 lm

Peak candela output:

13641 cd

Light quality:

CRI: 92,9

Color temperature:

2850 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter LD

Target:


2800K

Operator:

Paolo Carvone

Date and time:

07/05/2021 11:19:56

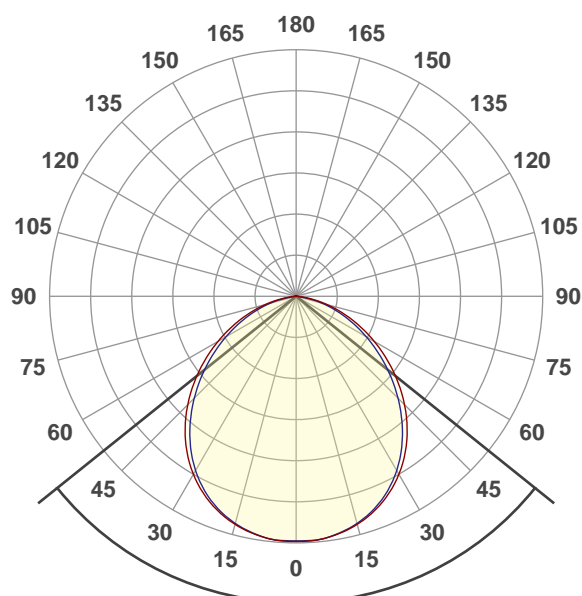




Beam angle 50%: 102,5°

Field angle 10%: 153,2°


Cut off angle 2.5%: 166,1°

Spectra

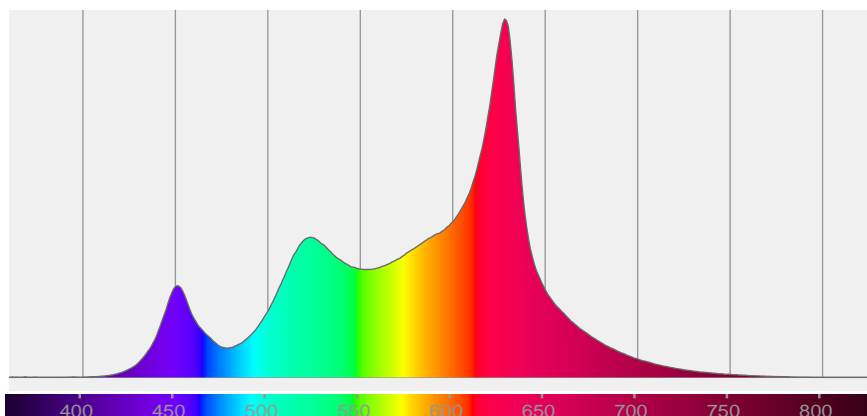


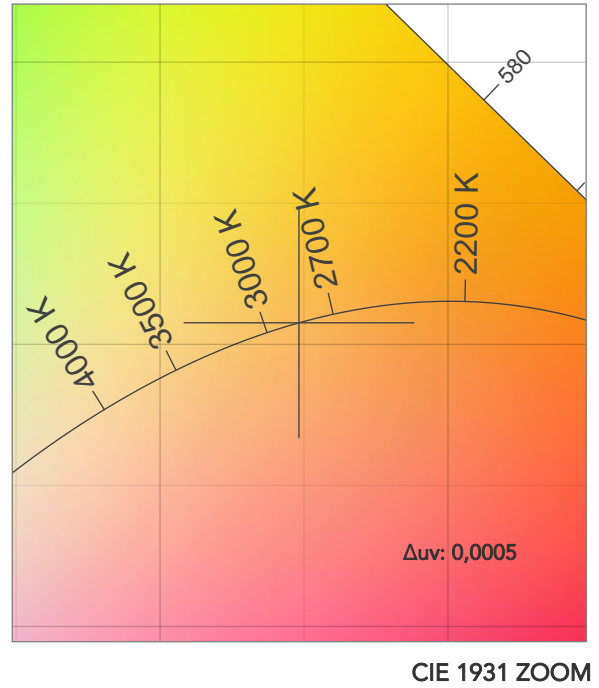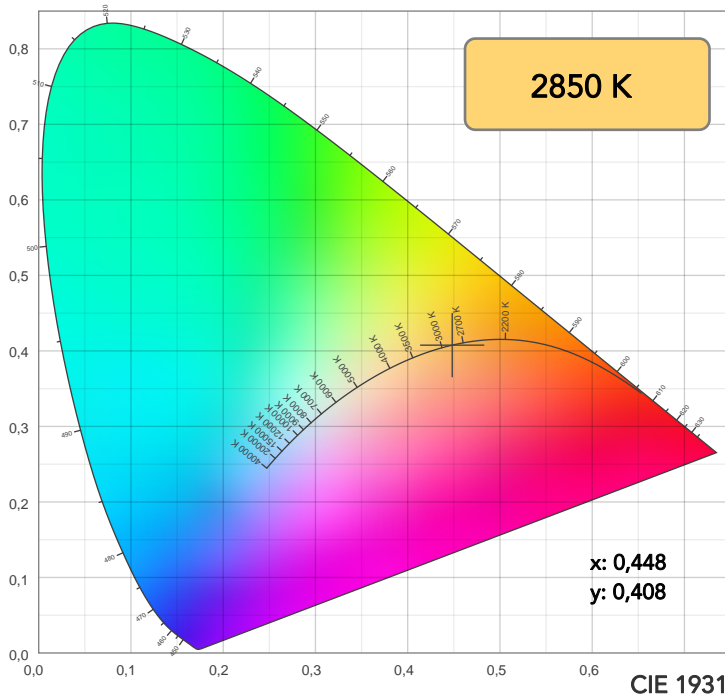

TM30: 90,7

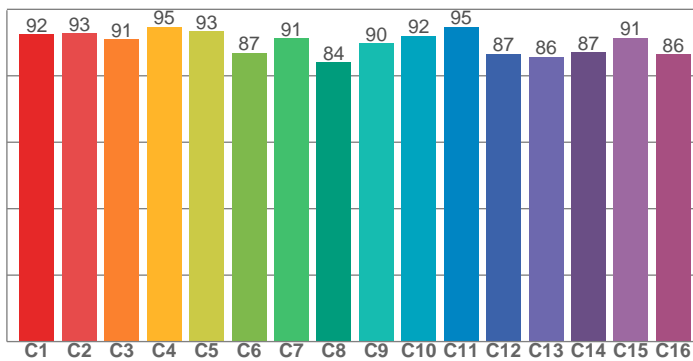

CRI: 92,9 (R1-R8)

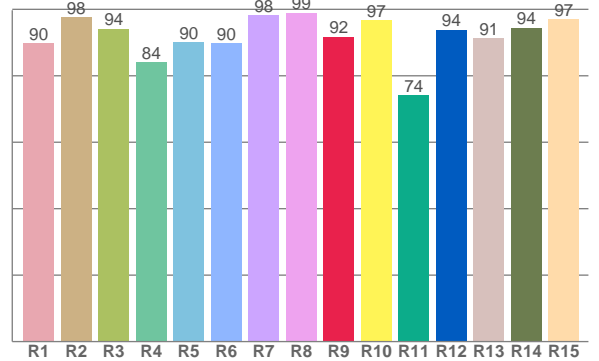

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
89,9	97,7	94,2	84,0	90,2	89,8	98,2	98,9	91,8	96,7	74,2	93,8	91,4	94,4	97,0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,5	92,8	91,0	94,8	93,4	86,8	91,3	84,0	89,8	92,0	94,7	86,6	85,7	87,0	91,5	86,4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
91,7	93,7	96,8	90,6	86,7	85,1	93,7	95,1	96,0	96,9	90,0	89,7	91,6	94,1	94,3

CQS: 91,5

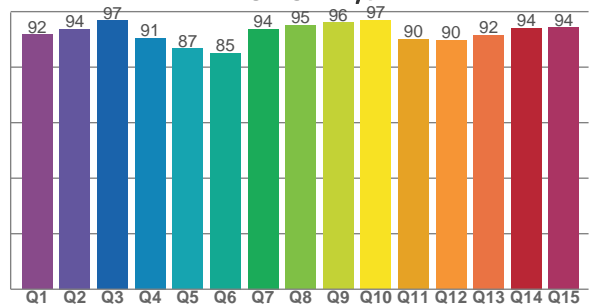

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
2850 K	92,9	91,8	90,7	104,6	91,5	78	0,448	0,408	0,0005

TM30 DETAILS

Rf 90,7
Fidelity index Rf


Rg 104,6
Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	0%	-1%
2	93	1%	-1%
3	91	1%	-1%
4	95	-1%	-1%
5	93	1%	4%
6	87	6%	5%
7	91	5%	1%
8	84	9%	-2%
9	90	4%	-3%
10	92	2%	-4%
11	95	1%	-1%
12	87	4%	-5%
13	86	3%	-10%
14	87	2%	-8%
15	91	1%	-1%
16	86	0%	-9%

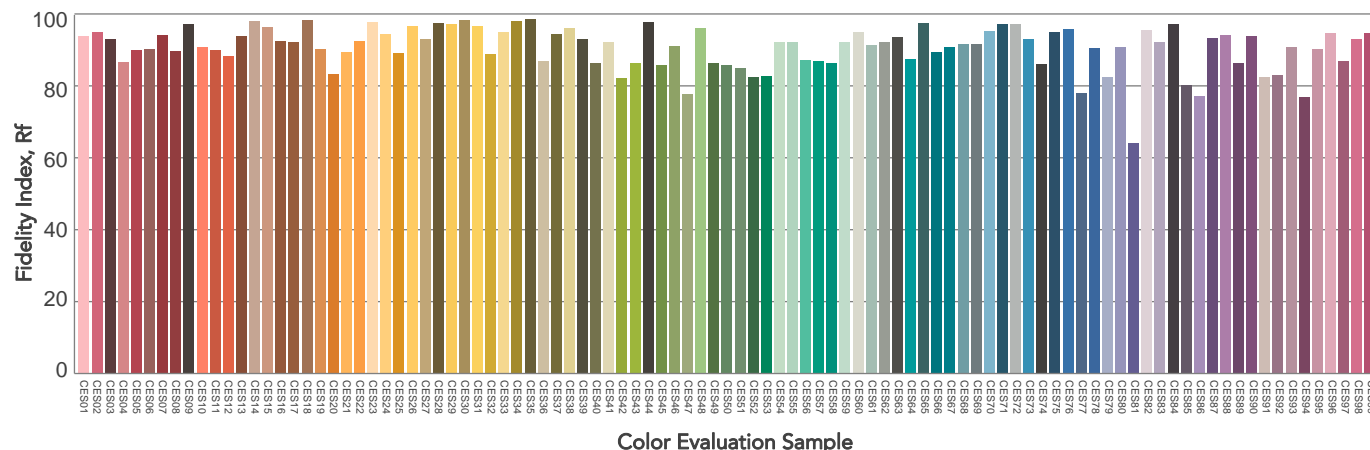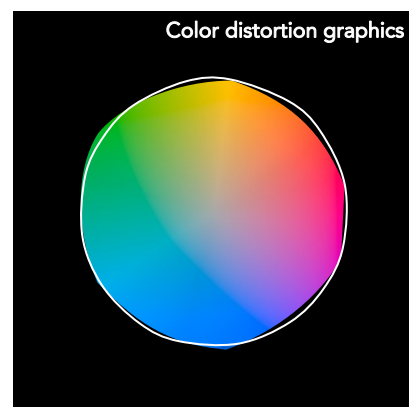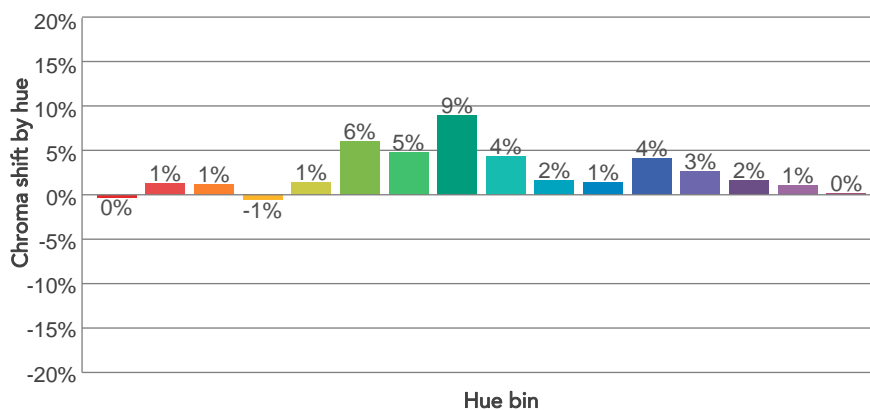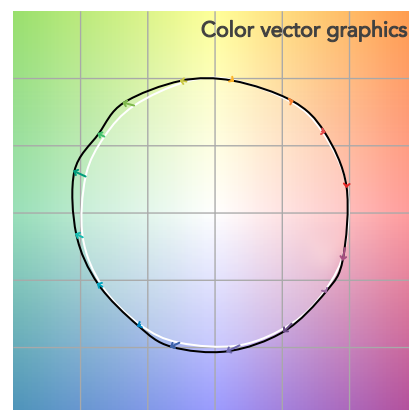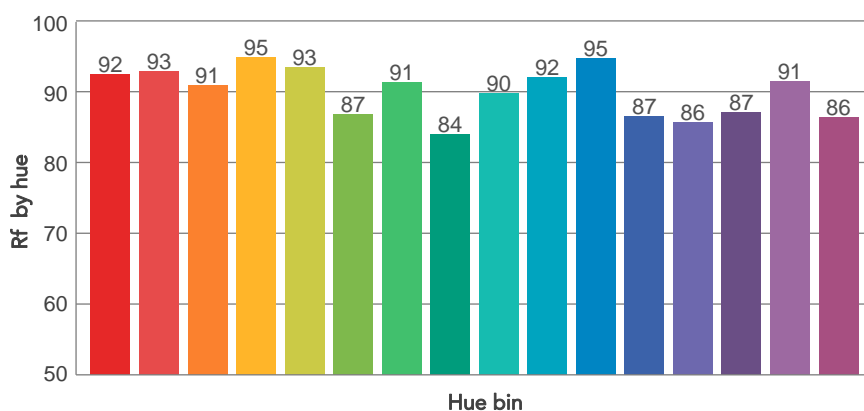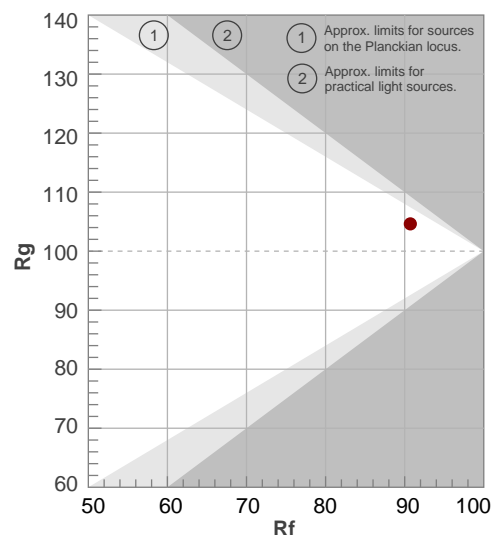

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,5°	153,2°	166,1°	83,6%	59,2%

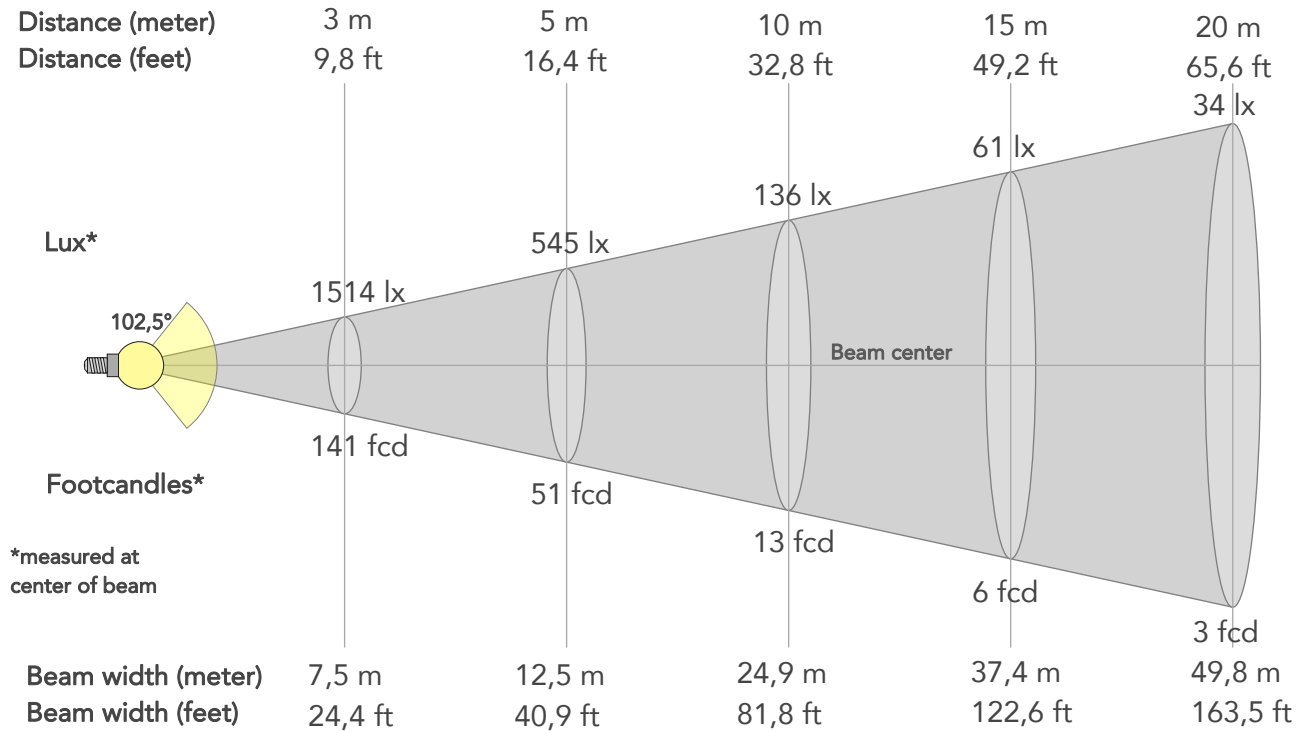

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	13628lx	3407lx	1514lx	852lx	545lx	242lx	136lx	61lx	34lx	22lx	15lx	9lx	5lx
Footcand.	1266fcd	317fcd	141fcd	79fcd	51fcd	23fcd	13fcd	6fcd	3fcd	2fcd	1fcd	1fcd	1fcd
Beam wid.	2,5m	5m	7,5m	10m	12,5m	18,7m	24,9m	37,4m	49,8m	62,3m	74,8m	99,7m	124,6m
Beam wid.	8,2ft	16,5ft	24,4ft	32,7ft	40,9ft	61,3ft	81,8ft	122,6ft	163,5ft	204,4ft	245,3ft	327ft	408,8ft


LINEAR DISTRIBUTION DIAGRAM

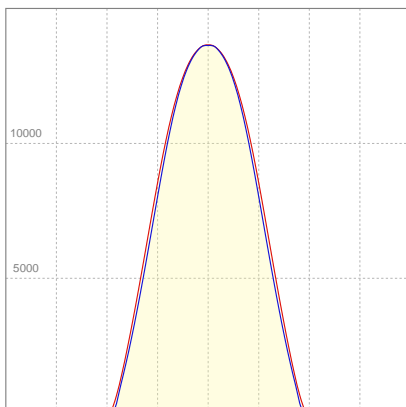

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	2,10A	450,4W	76lm/W

ISO CANDELA DIAGRAM

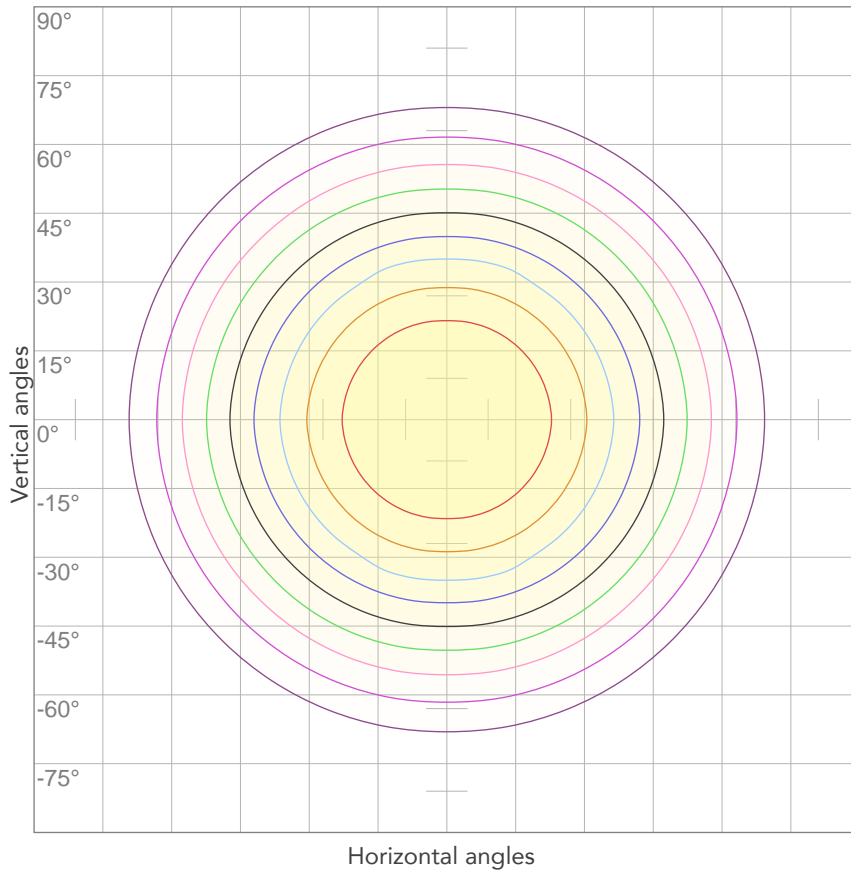


10%	1363 cd
20%	2726 cd
30%	4088 cd
40%	5451 cd
50%	6814 cd
60%	8177 cd
70%	9540 cd
80%	10903 cd

Conditions:

Number of c-planes: 4

Candela at center: 13628 cd

ISO LUX DIAGRAM

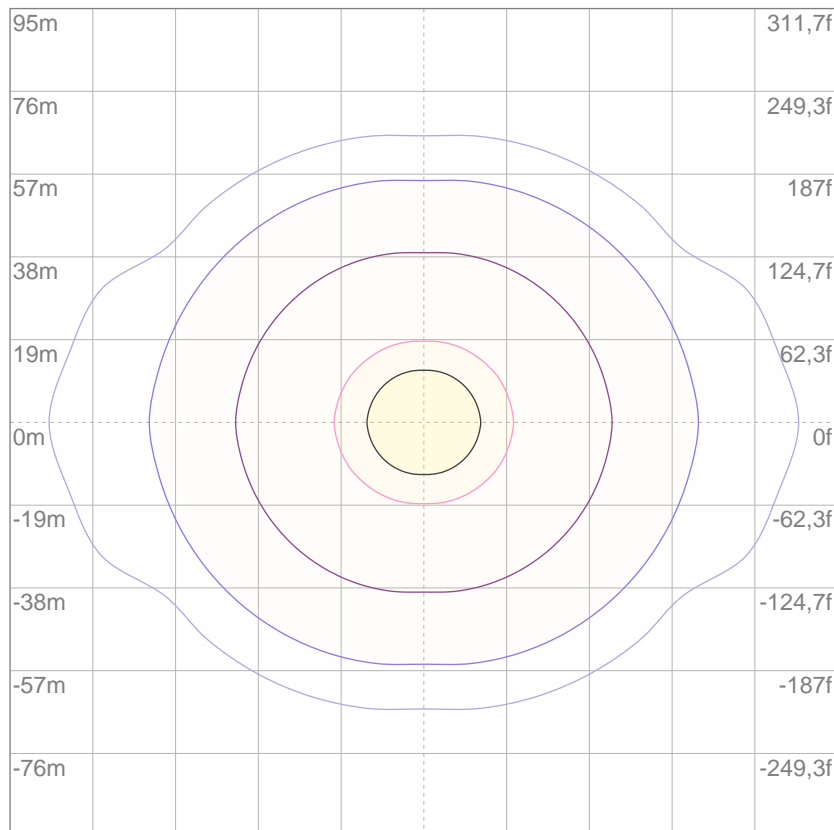

3%	4,09 lx
5%	6,81 lx
10%	13,6 lx
30%	40,9 lx
50%	68,1 lx

Conditions:

Number of c-planes: 4

Lux at center: 136 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

31291 lm

Peak candela output:

18884 cd

Light quality:

CRI: 92,5

Color temperature:

2820 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter Int.

Target:


2800K

Operator:

Paolo Carvone

Date and time:

14/08/2020 10:31:02

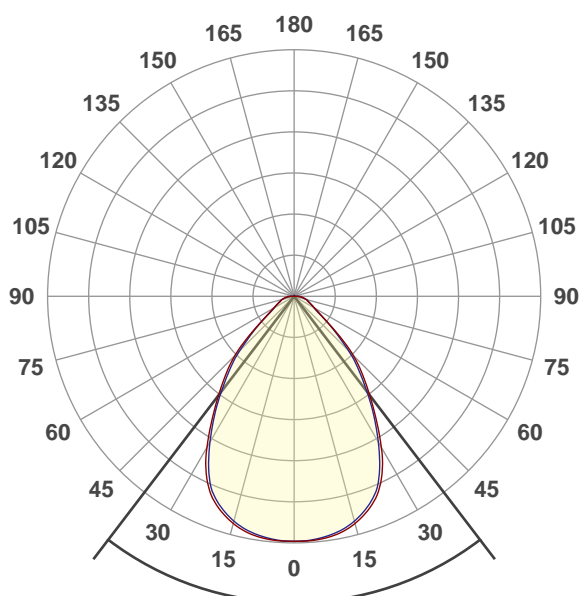


Beam angle 50%: 74,7°



Field angle 10%: 118,1°

Cut off angle 2.5%: 170,5°


Spectra

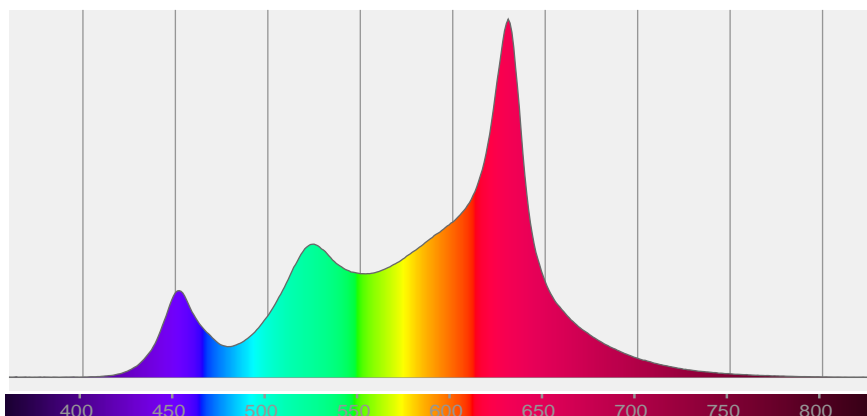


COLOR DETAILS

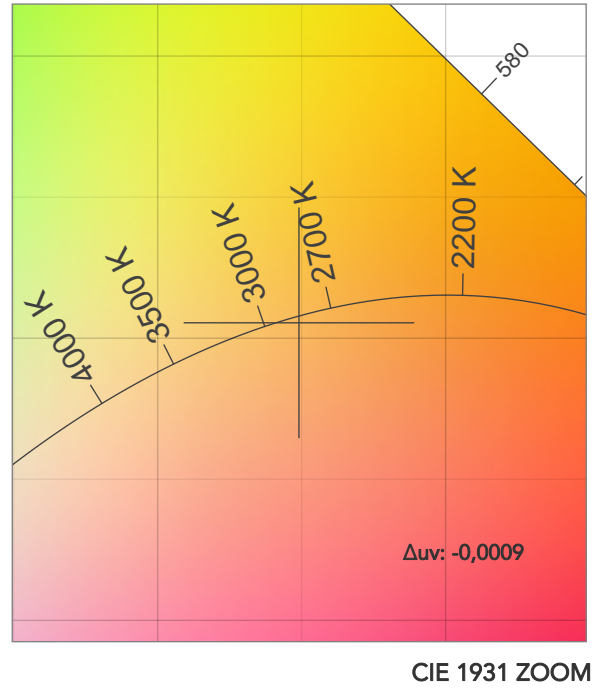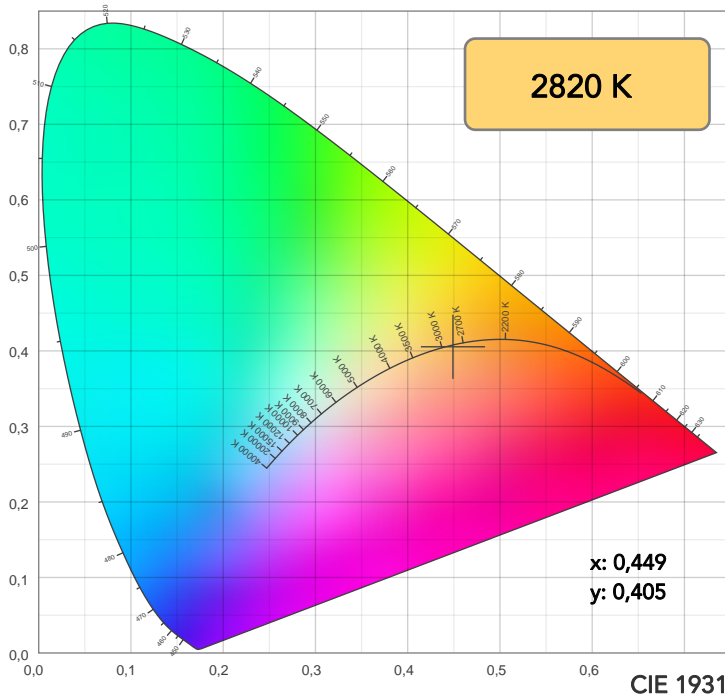

TM30: 91,0

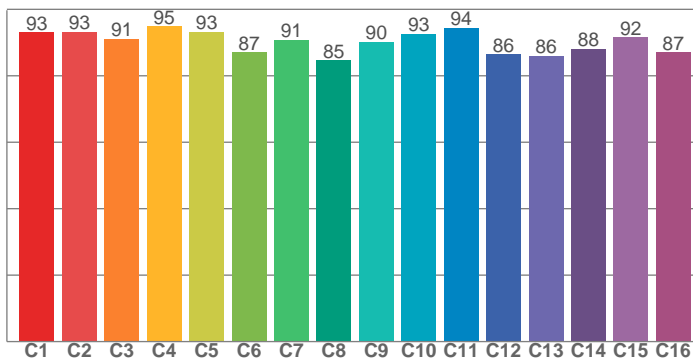

CRI: 92,5 (R1-R8)

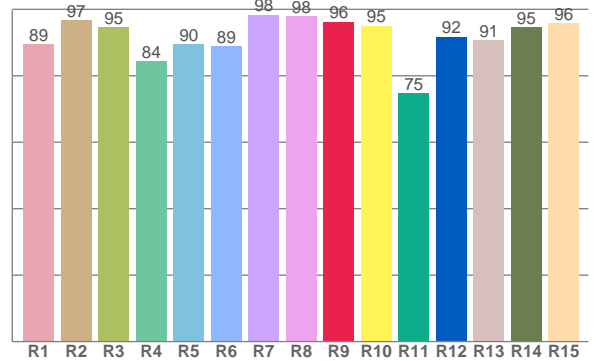

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
89,5	96,8	94,5	84,5	89,5	89,0	98,4	97,8	96,3	95,1	74,7	91,8	90,7	94,6	95,8


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93,0	93,2	91,0	94,8	93,2	87,0	90,9	84,6	90,2	92,6	94,5	86,5	85,9	88,1	91,5	87,1

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93,2	93,7	96,1	91,6	87,7	85,6	92,6	96,2	96,1	97,5	91,7	90,9	92,5	93,6	95,3

CQS: 92,1

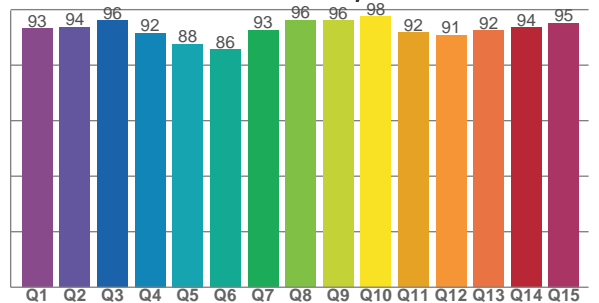

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
2820 K	92,5	96,3	91,0	105,1	92,1	82	0,449	0,405	-0,0009

TM30 DETAILS

Rf 91,0
Fidelity index Rf


Rg 105,1
Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	93	0%	-1%
2	93	2%	-1%
3	91	2%	-1%
4	95	-1%	-1%
5	93	2%	4%
6	87	6%	5%
7	91	5%	1%
8	85	9%	-2%
9	90	4%	-3%
10	93	2%	-3%
11	94	2%	-1%
12	86	4%	-5%
13	86	3%	-9%
14	88	2%	-7%
15	92	1%	-1%
16	87	1%	-8%

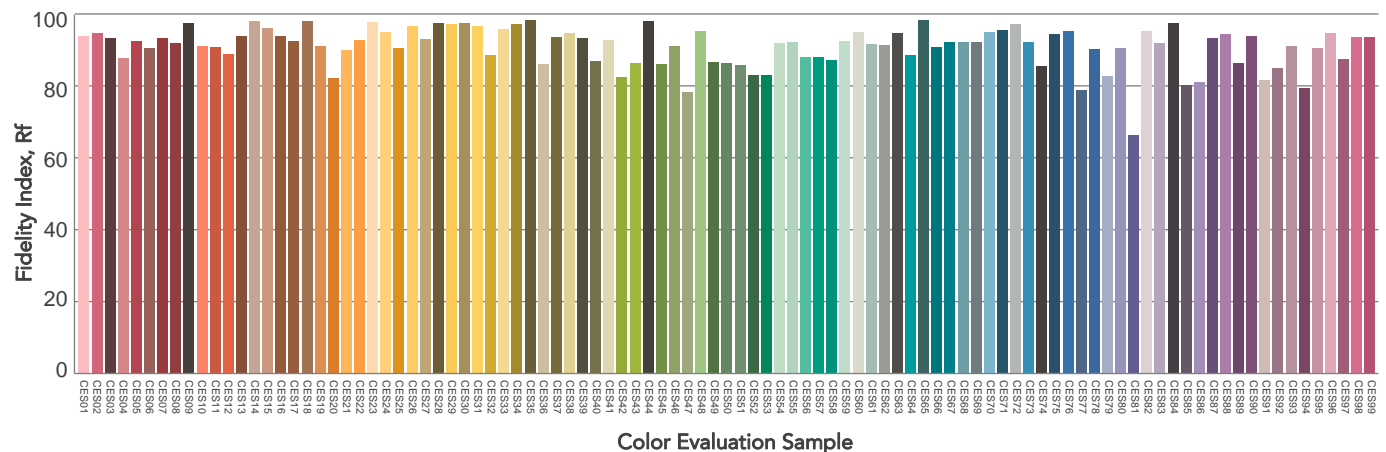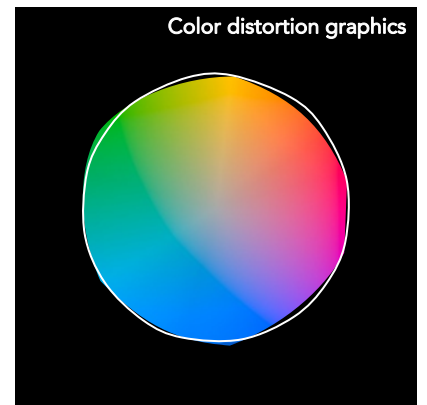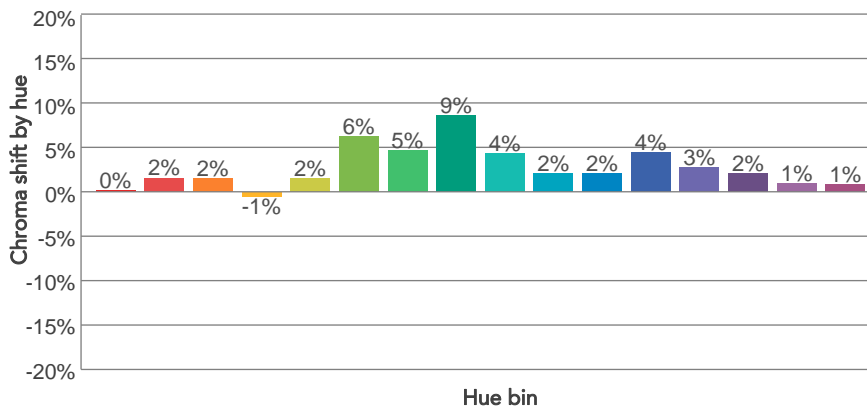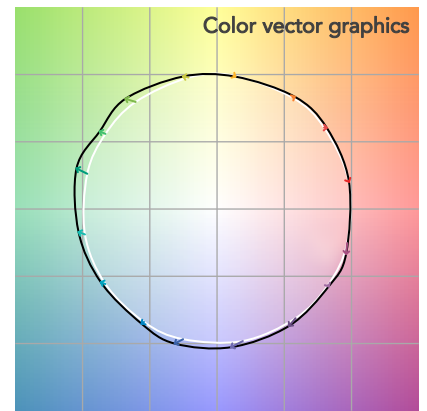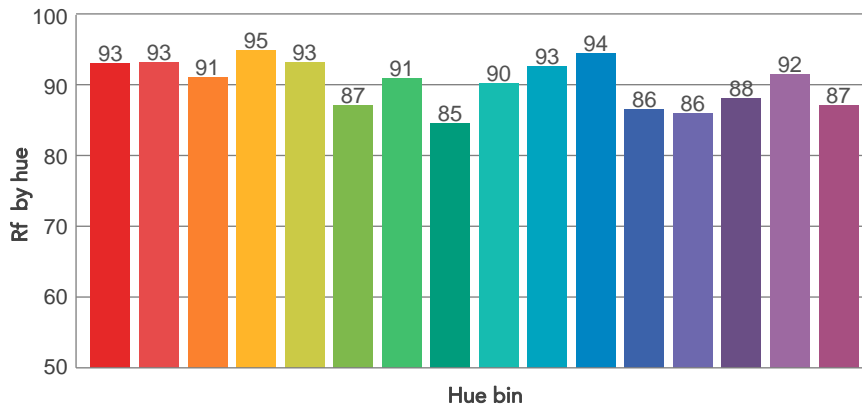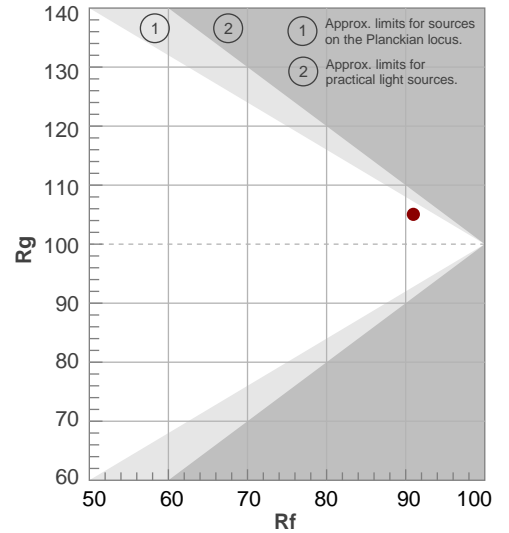

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
74,7°	118,1°	170,5°	88,3%	74,3%

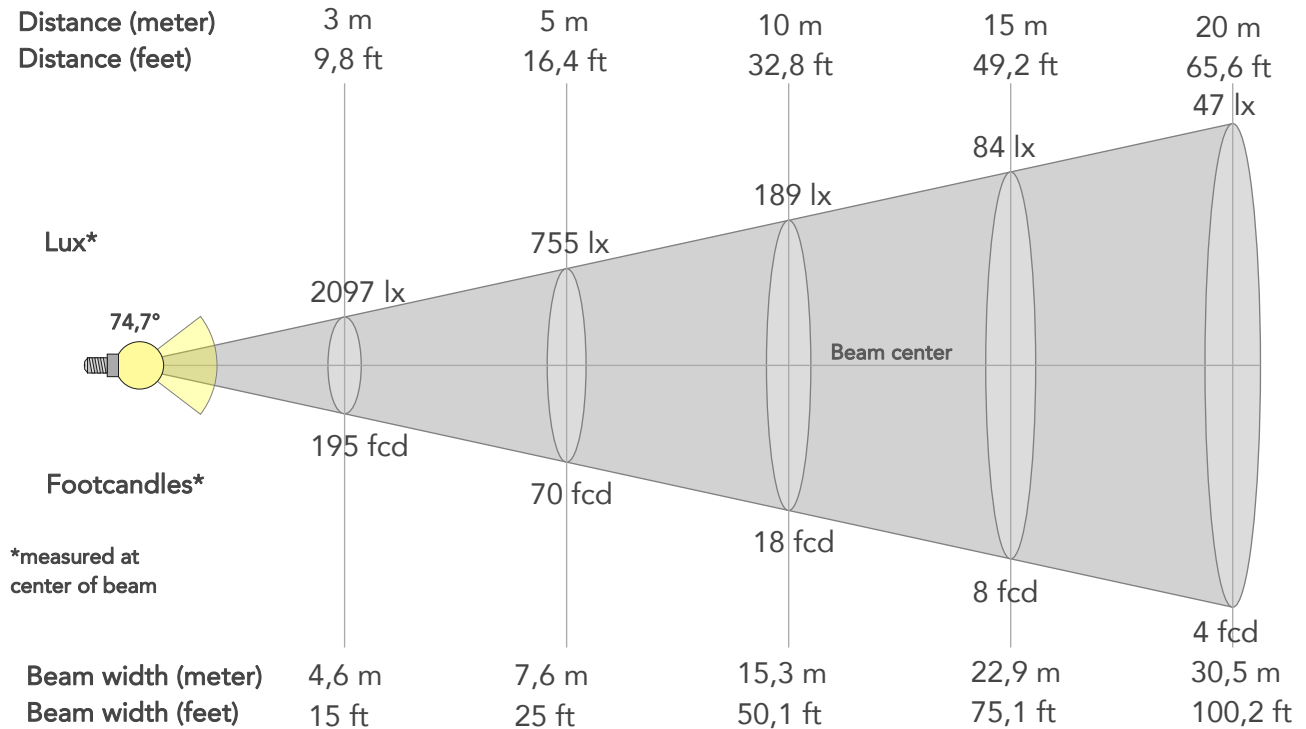

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	18876lx	4719lx	2097lx	1180lx	755lx	336lx	189lx	84lx	47lx	30lx	21lx	12lx	8lx
Footcand.	1754fcd	438fcd	195fcd	110fcd	70fcd	31fcd	18fcd	8fcd	4fcd	3fcd	2fcd	1fcd	1fcd
Beam wid.	1,5m	3,1m	4,6m	6,1m	7,6m	11,5m	15,3m	22,9m	30,5m	38,2m	45,8m	61,1m	76,4m
Beam wid.	5ft	10,1ft	15ft	20ft	25ft	37,6ft	50,1ft	75,1ft	100,2ft	125,2ft	150,3ft	200,4ft	250,4ft


LINEAR DISTRIBUTION DIAGRAM

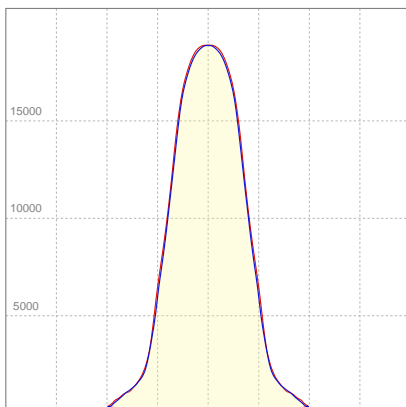

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	2,06A	450,1W	70lm/W

ISO CANDELA DIAGRAM

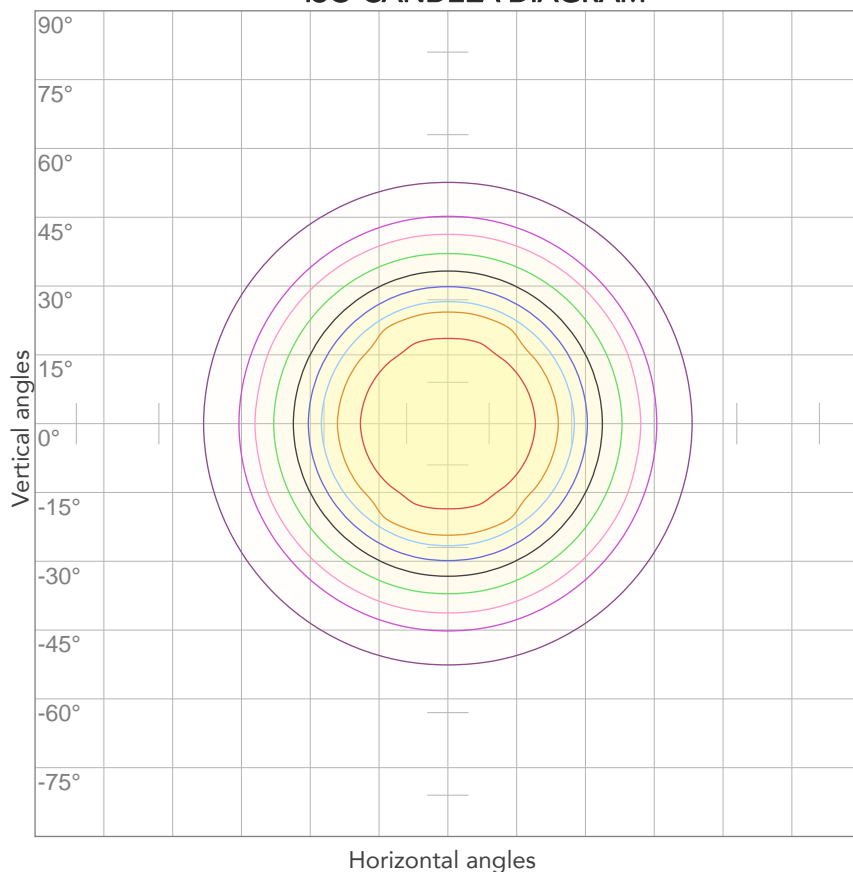


10%	1888 cd
20%	3775 cd
30%	5663 cd
40%	7551 cd
50%	9438 cd
60%	11326 cd
70%	13213 cd
80%	15101 cd

Conditions:

Number of c-planes: 4

Candela at center: 18876 cd

ISO LUX DIAGRAM

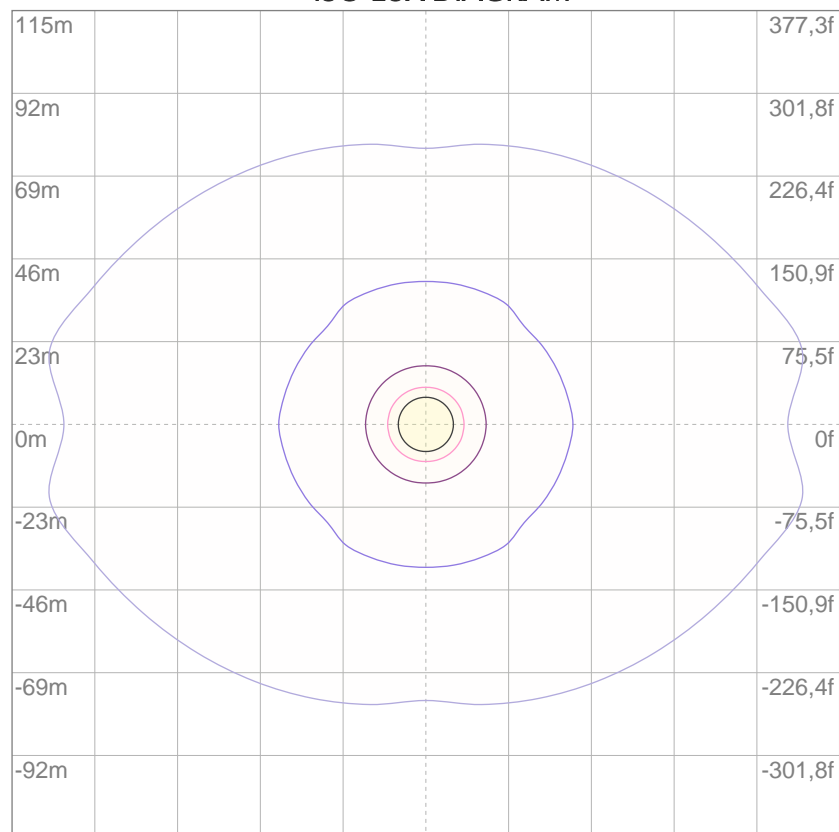

3%	5,66 lx
5%	9,44 lx
10%	18,9 lx
30%	56,6 lx
50%	94,4 lx

Conditions:

Number of c-planes: 4

Lux at center: 189 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

29524 lm

Peak candela output:

10059 cd

Light quality:

CRI: 92,4

Color temperature:

3311 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter HD

Target:


3200K

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:02:33

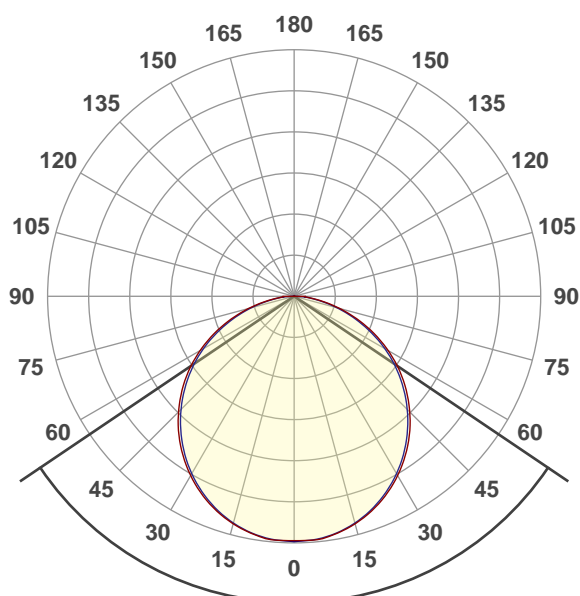




Beam angle 50%: 111,9°

Field angle 10%: 161,9°


Cut off angle 2.5%: 176,4°

Spectra

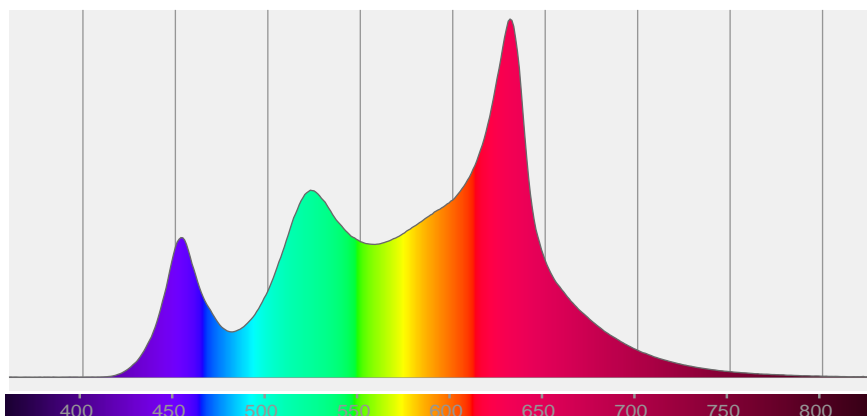


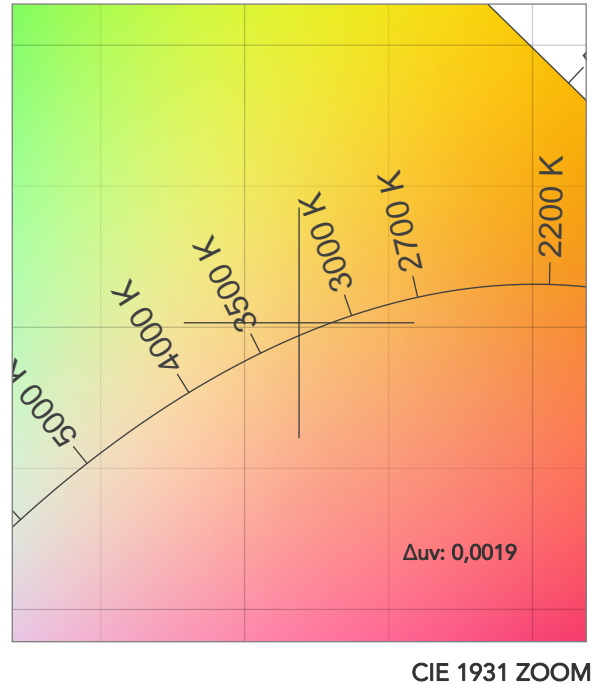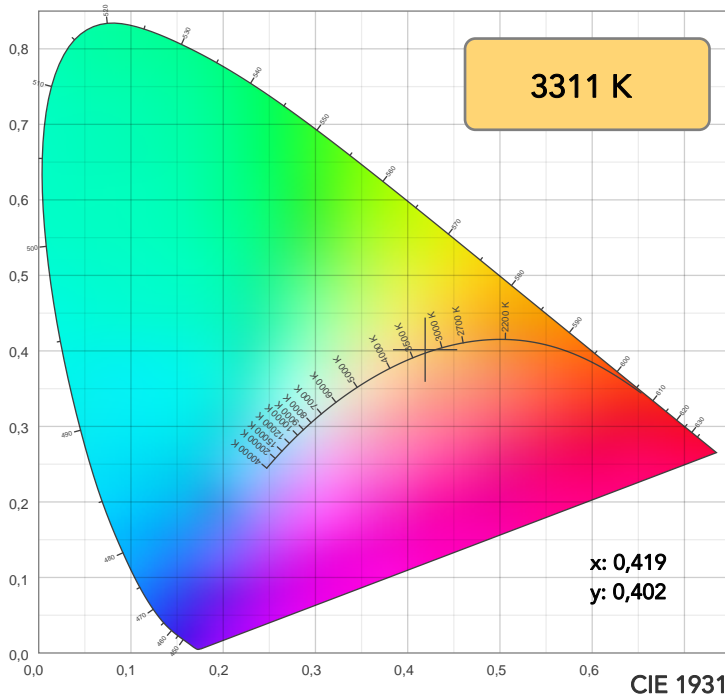

TM30: 91,4

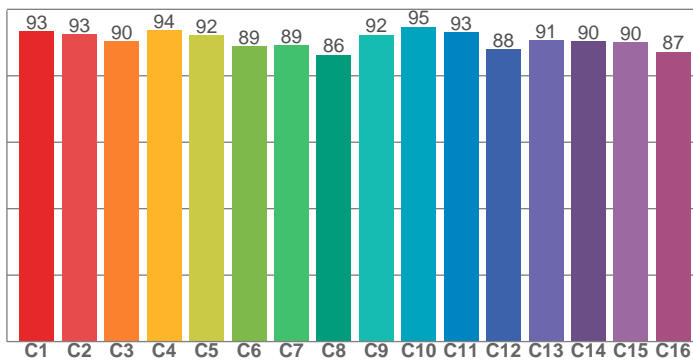

CRI: 92,4 (R1-R8)

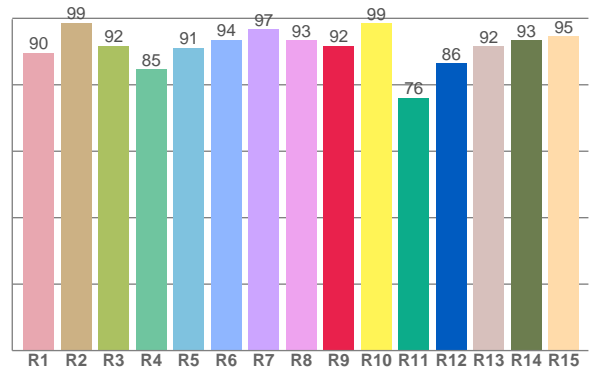

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
89,7	98,7	91,7	84,7	91,1	93,5	96,7	93,4	91,7	98,6	76,1	86,5	91,6	93,4	94,6


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93,3	92,5	90,4	93,6	92,1	88,9	89,1	86,3	92,2	94,8	93,0	87,9	90,6	90,4	90,0	87,3

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
95,2	96,0	95,7	94,3	90,6	89,6	95,9	94,5	94,9	95,4	89,5	88,8	90,4	95,7	96,0

CQS: 92,9




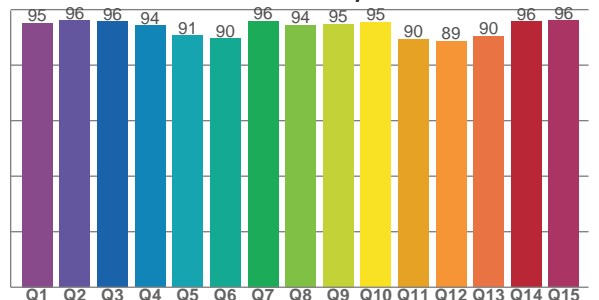


COLOR PARAMETERS

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
3311 K	92,4	91,7	91,4	104,3	92,9	87	0,419	0,402	0,0019


Gammut index

		Graphic shifts (%)	
Hue Bin	R_f	Chroma	Hue
1	93	1%	0%
2	93	2%	-2%
3	90	1%	-3%
4	94	-2%	-2%
5	92	-3%	2%
6	89	4%	5%
7	89	4%	3%
8	86	7%	-1%
9	92	4%	0%
10	95	1%	0%
11	93	2%	2%
12	88	5%	-4%
13	91	2%	-6%
14	90	3%	-4%
15	90	2%	-1%
16	87	4%	-6%

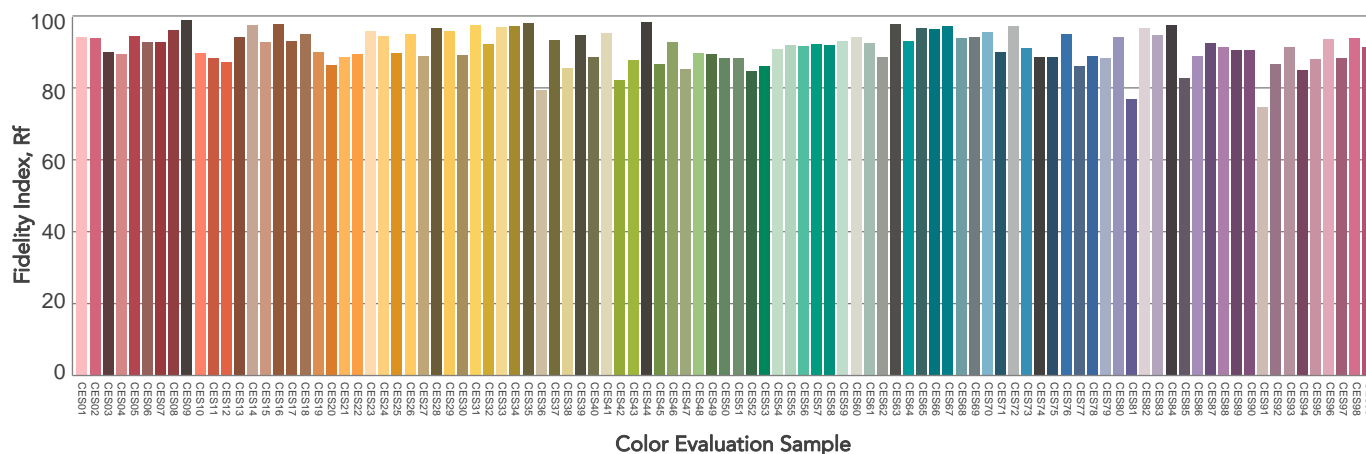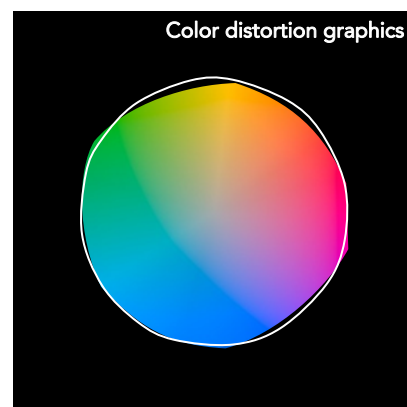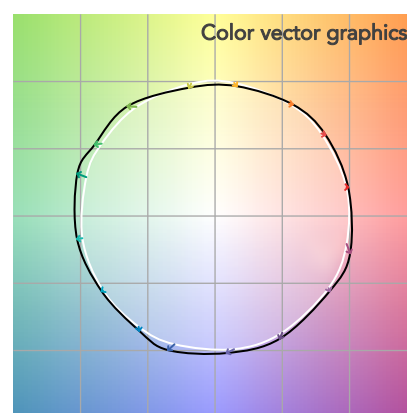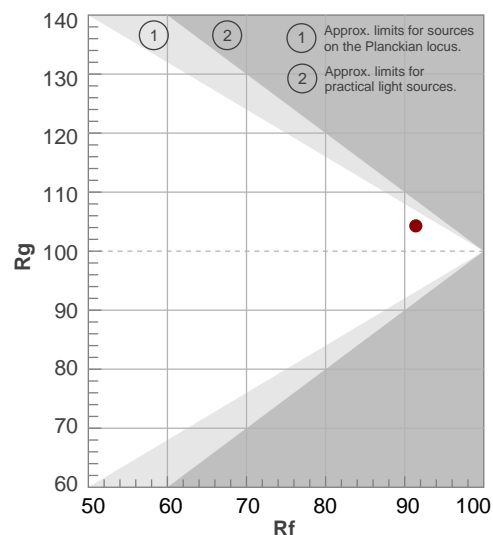

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
111,9°	161,9°	176,4°	76,1%	51,9%

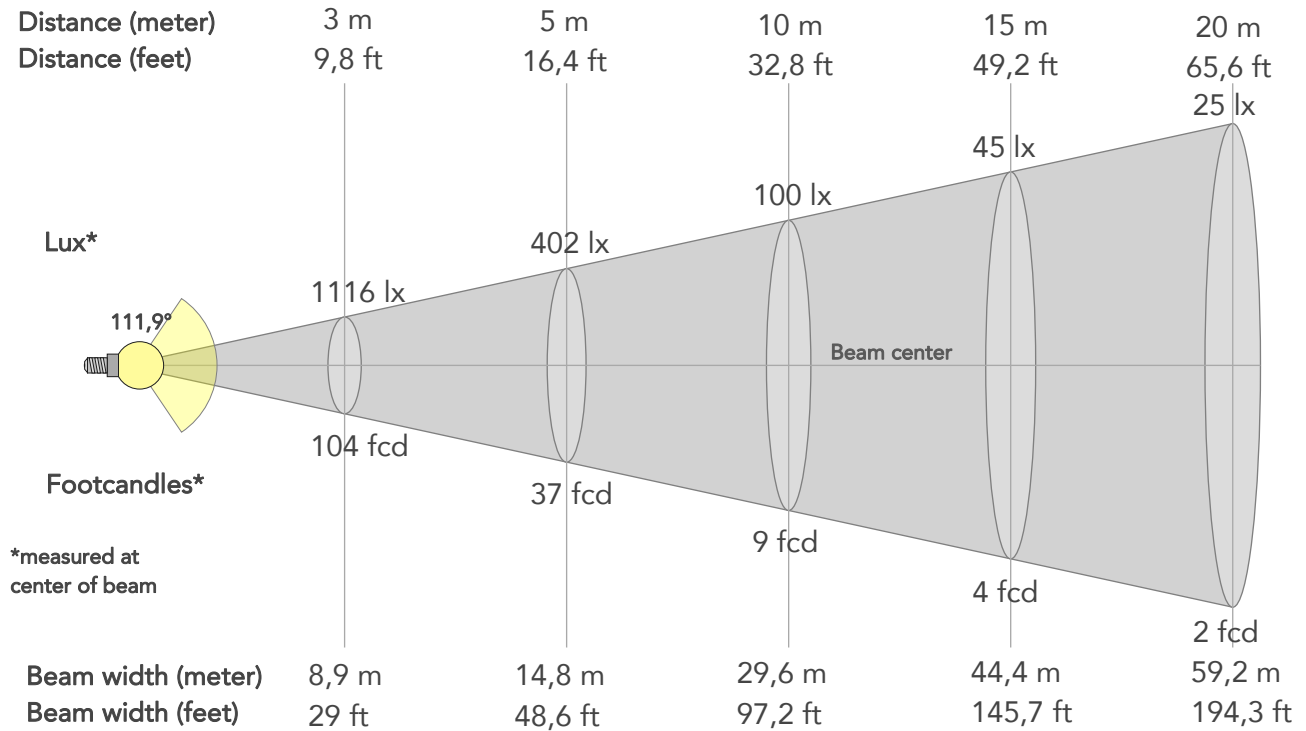

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	10048lx	2512lx	1116lx	628lx	402lx	179lx	100lx	45lx	25lx	16lx	11lx	6lx	4lx
Footcand.	934fcd	233fcd	104fcd	58fcd	37fcd	17fcd	9fcd	4fcd	2fcd	1fcd	1fcd	1fcd	0fcd
Beam wid.	3m	5,9m	8,9m	11,8m	14,8m	22,2m	29,6m	44,4m	59,2m	74,1m	88,9m	118,5m	148,1m
Beam wid.	9,8ft	19,6ft	29ft	38,8ft	48,6ft	72,9ft	97,2ft	145,7ft	194,3ft	242,9ft	291,5ft	388,6ft	485,8ft


LINEAR DISTRIBUTION DIAGRAM

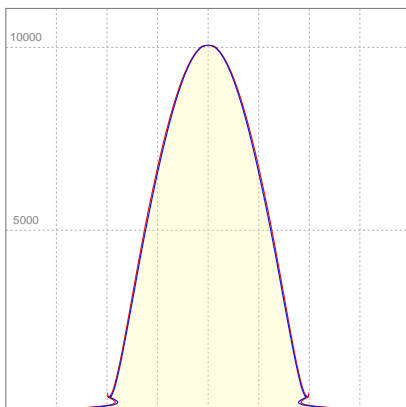

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
223V	2,05A	439W	67lm/W

ISO CANDELA DIAGRAM

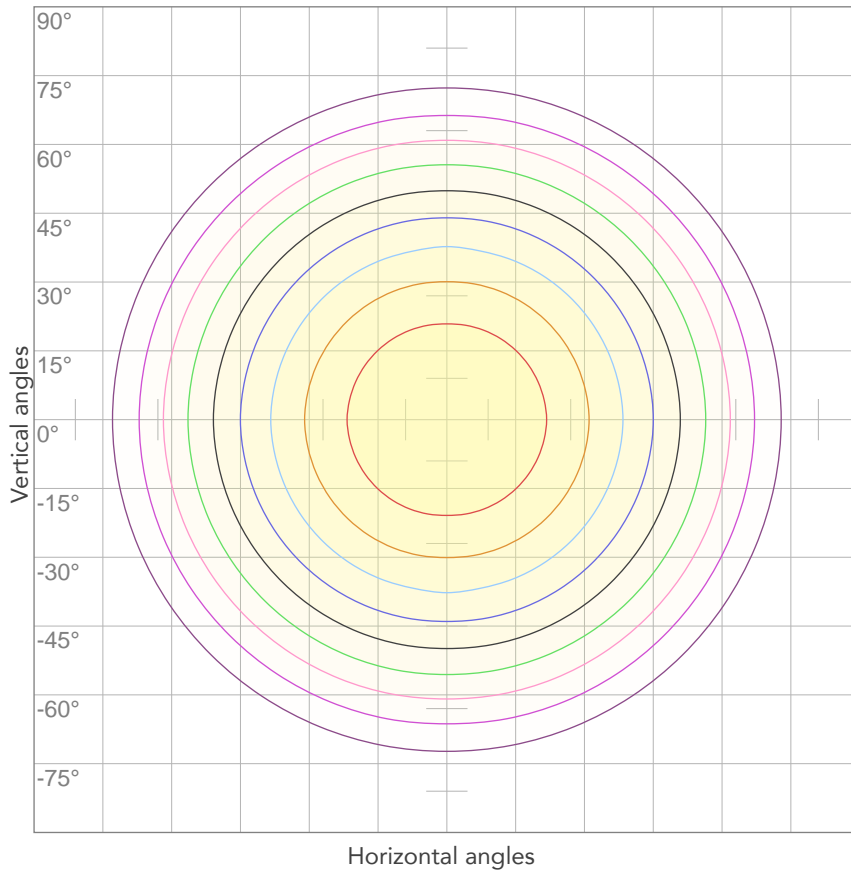


10%	1005 cd
20%	2010 cd
30%	3015 cd
40%	4019 cd
50%	5024 cd
60%	6029 cd
70%	7034 cd
80%	8039 cd

Conditions:

Number of c-planes: 4

Candela at center: 10048 cd

ISO LUX DIAGRAM

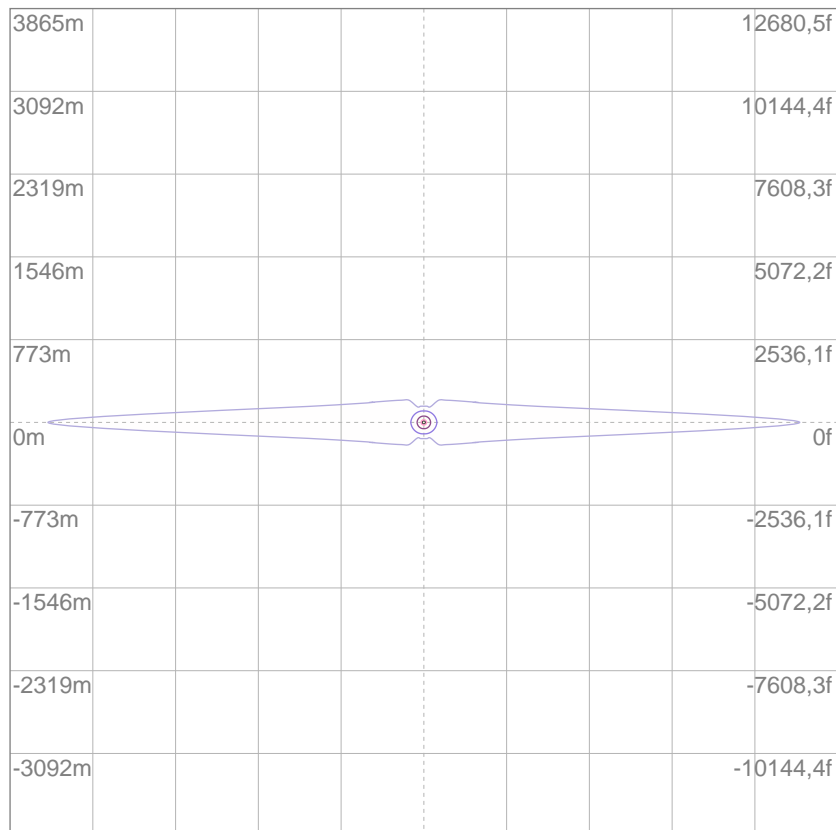

3%	3,01 lx
5%	5,02 lx
10%	10,0 lx
30%	30,1 lx
50%	50,2 lx

Conditions:

Number of c-planes: 4

Lux at center: 100 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

33993 lm

Peak candela output:

13055 cd

Light quality:

CRI: 94,6

Color temperature:

3279 K

PRODUCT NAME:

ECLPANEL TWC

MEASUREMENT CONDITIONS:

Beam angle:

Filter MD

Target:


3200K

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:39:29

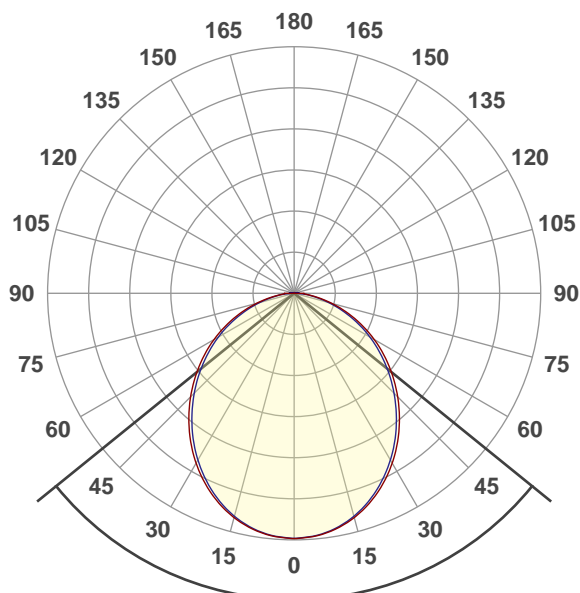




Beam angle 50%: 102°

Field angle 10%: 158,6°


Cut off angle 2.5%: 175,6°

Spectra

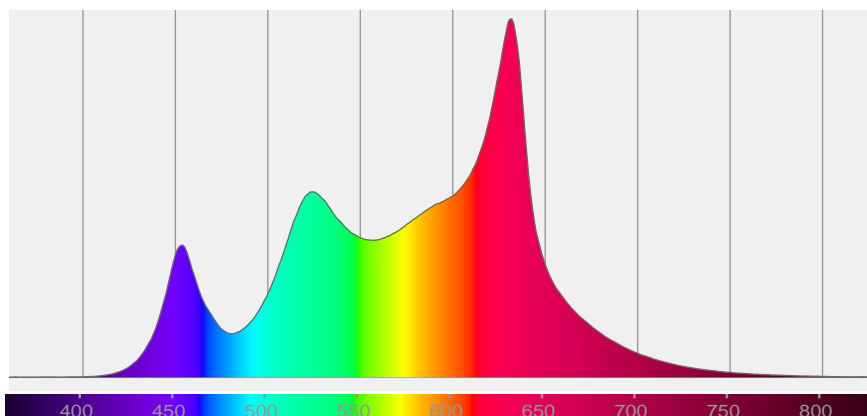


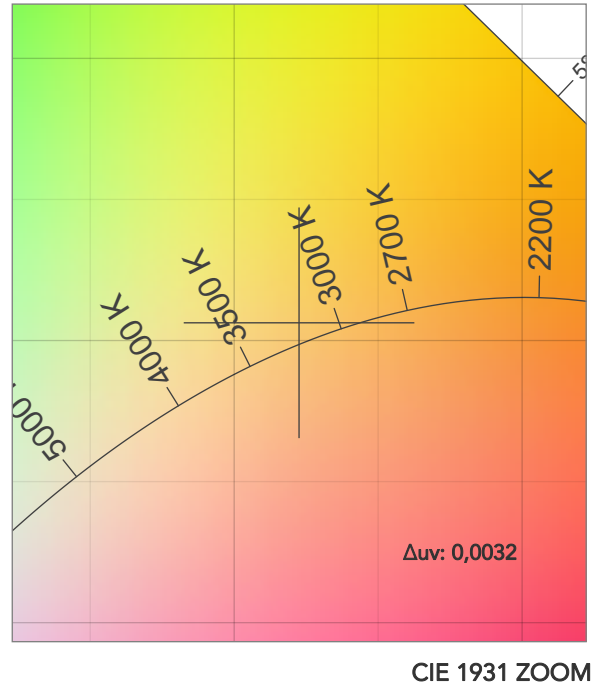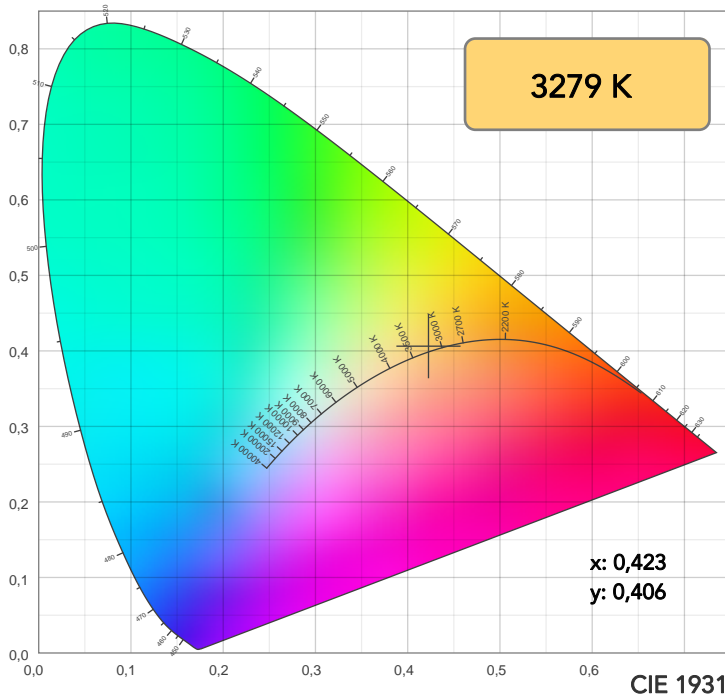

TM30: 92,0

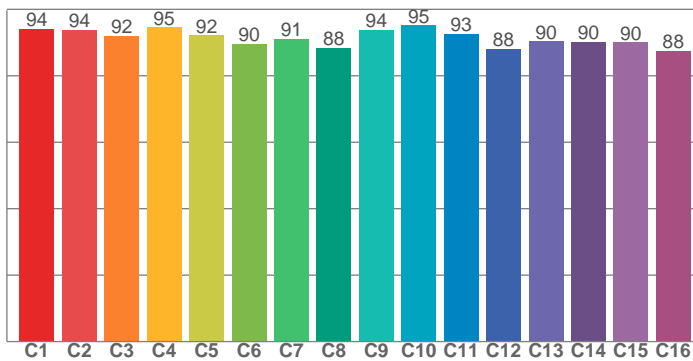

CRI: 94,6 (R1-R8)

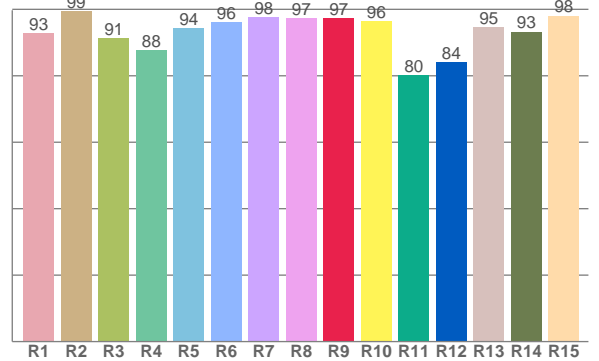

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92,9	99,3	91,3	87,7	94,4	96,2	97,6	97,2	97,3	96,5	80,1	84,1	94,6	93,3	98,1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94,1	93,9	92,0	94,6	92,1	89,7	91,1	88,5	93,8	95,2	92,7	88,1	90,4	90,1	90,1	87,6

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94,2	95,7	94,6	96,0	92,1	90,3	95,5	95,3	94,5	94,0	89,7	89,8	91,3	96,6	96,6

CQS: 93,2

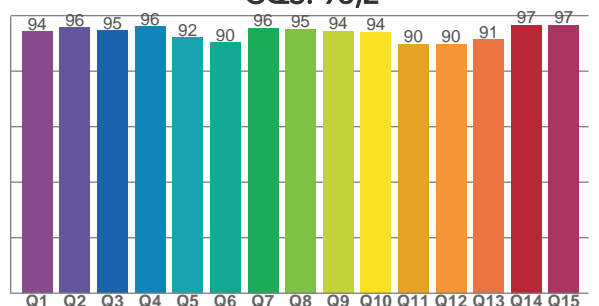

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
3279 K	94,6	97,3	92,0	103,1	93,2	88	0,423	0,406	0,0032

TM30 DETAILS

Rf 92,0
Fidelity index Rf


Rg 103,1
Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	94	0%	0%
2	94	1%	-2%
3	92	0%	-2%
4	95	-2%	-1%
5	92	-2%	3%
6	90	4%	5%
7	91	2%	3%
8	88	6%	-1%
9	94	3%	0%
10	95	0%	1%
11	93	2%	3%
12	88	5%	-3%
13	90	2%	-6%
14	90	3%	-5%
15	90	2%	-2%
16	88	3%	-7%

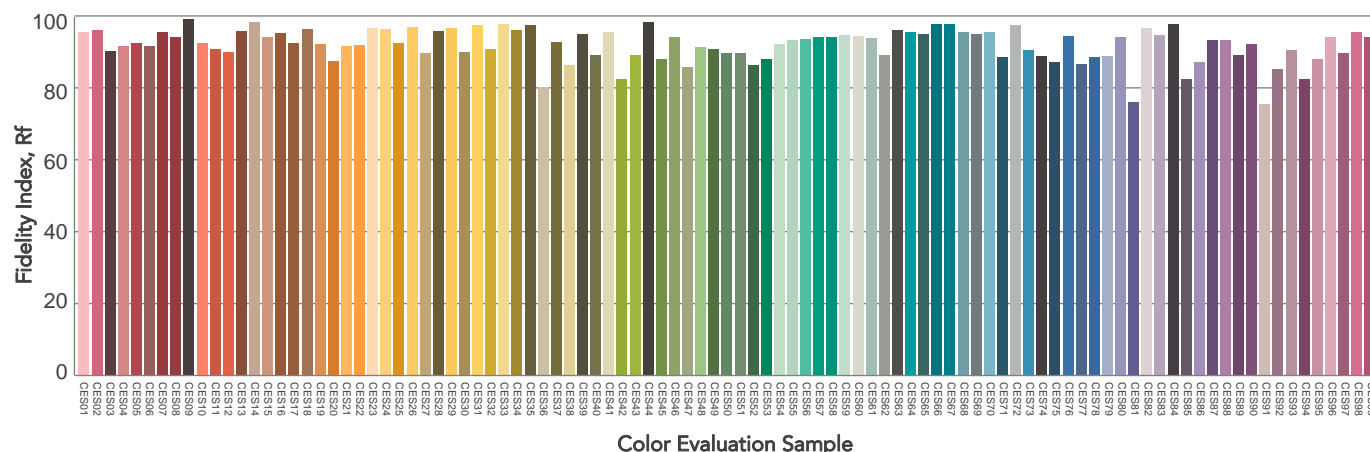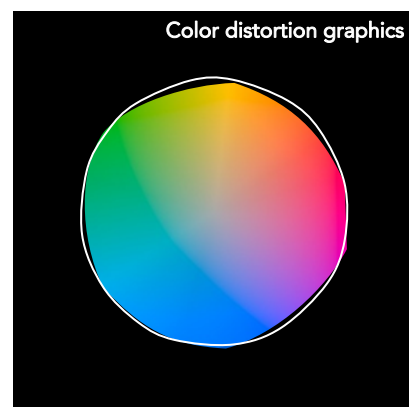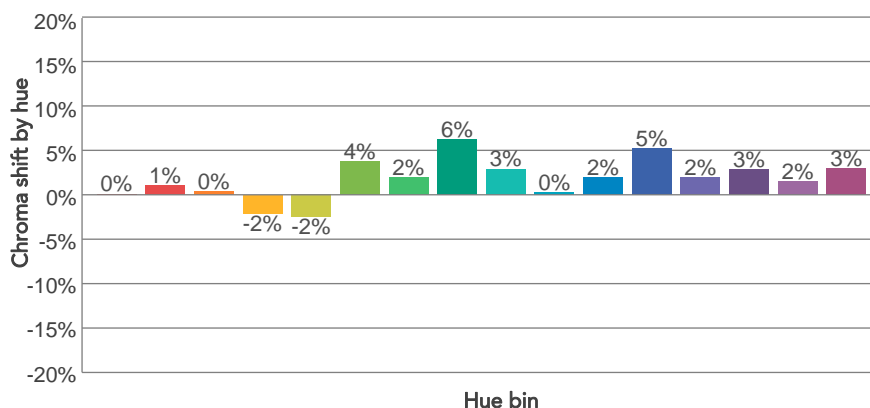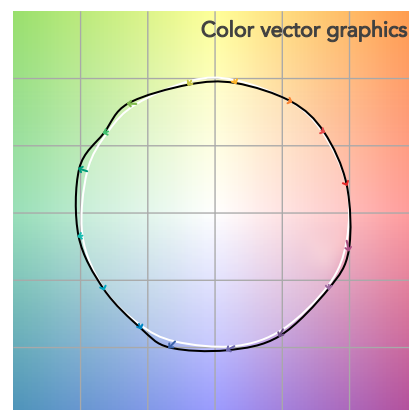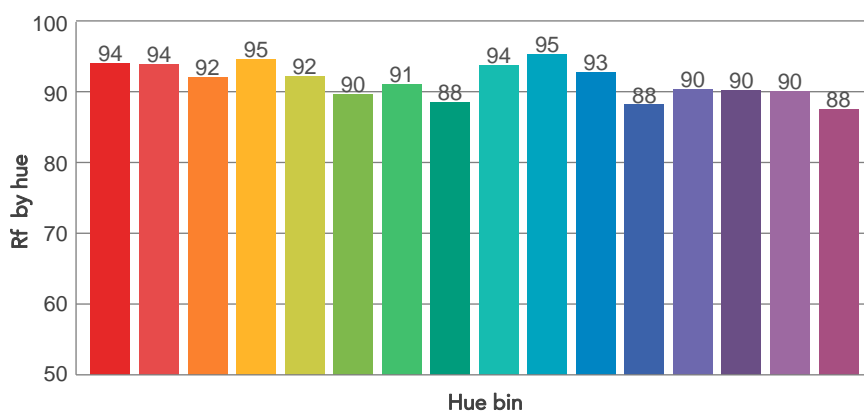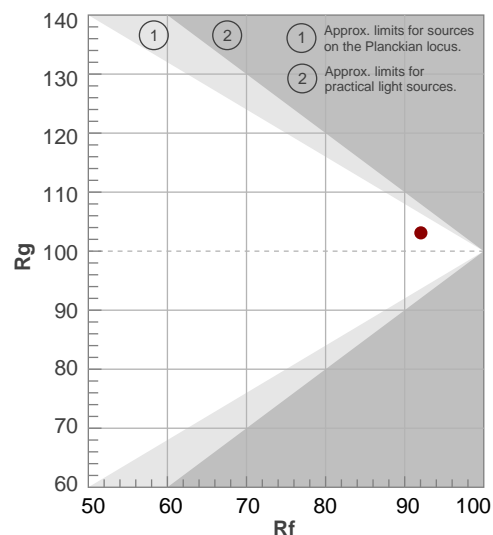

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102°	158,6°	175,6°	79,0%	55,2%

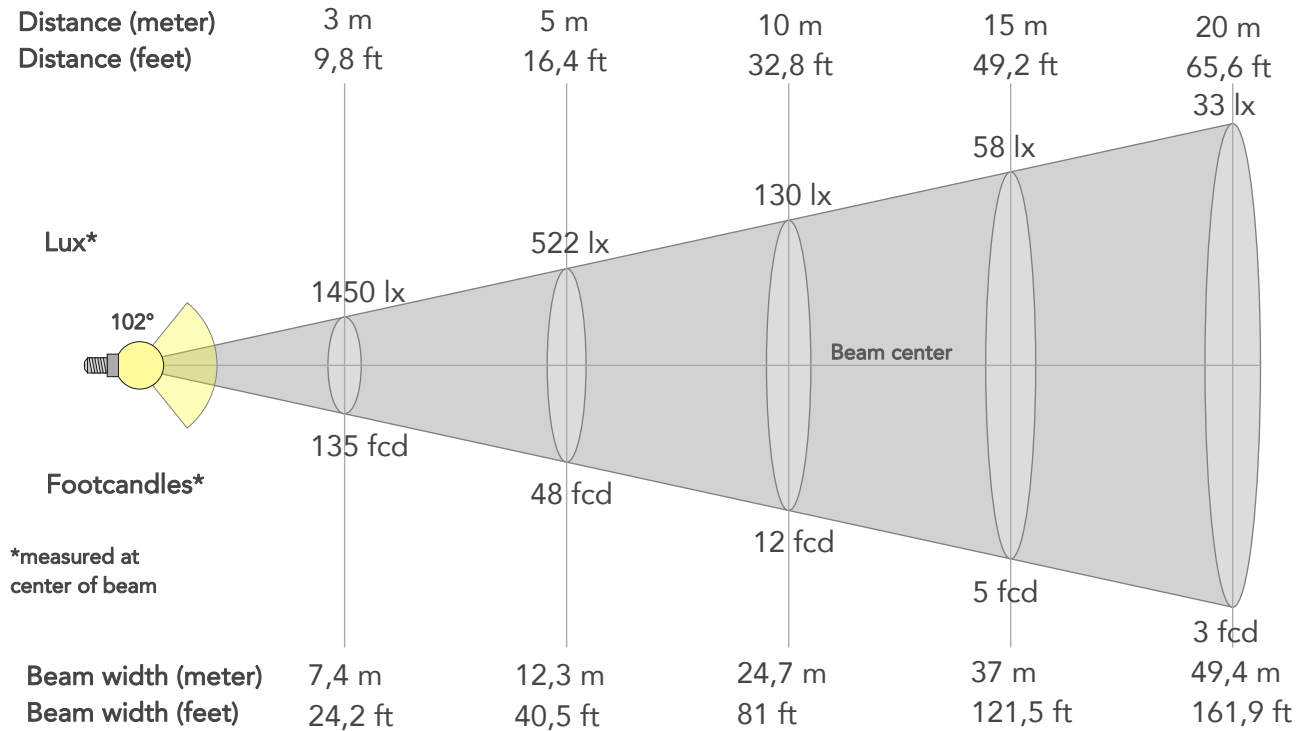

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	13046lx	3262lx	1450lx	815lx	522lx	232lx	130lx	58lx	33lx	21lx	14lx	8lx	5lx
Footcand.	1212fcd	303fcd	135fcd	76fcd	48fcd	22fcd	12fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	4,9m	7,4m	9,9m	12,3m	18,5m	24,7m	37m	49,4m	61,7m	74,1m	98,7m	123,4m
Beam wid.	8,1ft	16,3ft	24,2ft	32,3ft	40,5ft	60,7ft	81ft	121,5ft	161,9ft	202,4ft	242,9ft	323,9ft	404,8ft


LINEAR DISTRIBUTION DIAGRAM

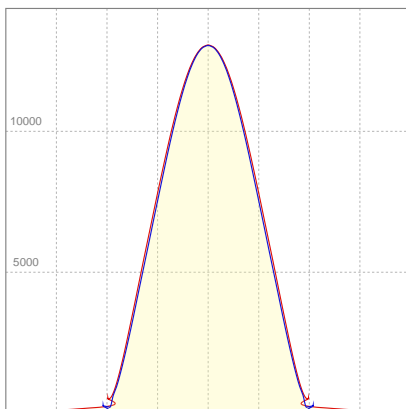

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
223V	2,05A	437,4W	78lm/W

ISO CANDELA DIAGRAM

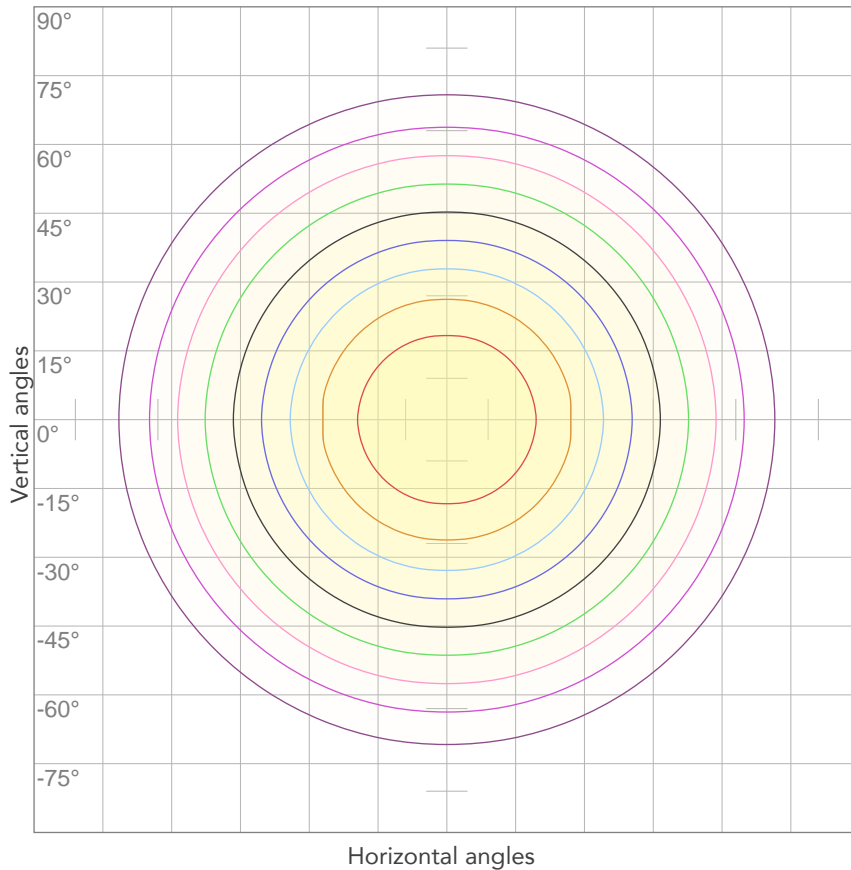


10%	1305 cd
20%	2609 cd
30%	3914 cd
40%	5218 cd
50%	6523 cd
60%	7828 cd
70%	9132 cd
80%	10437 cd

Conditions:

Number of c-planes: 4

Candela at center: 13046 cd

ISO LUX DIAGRAM

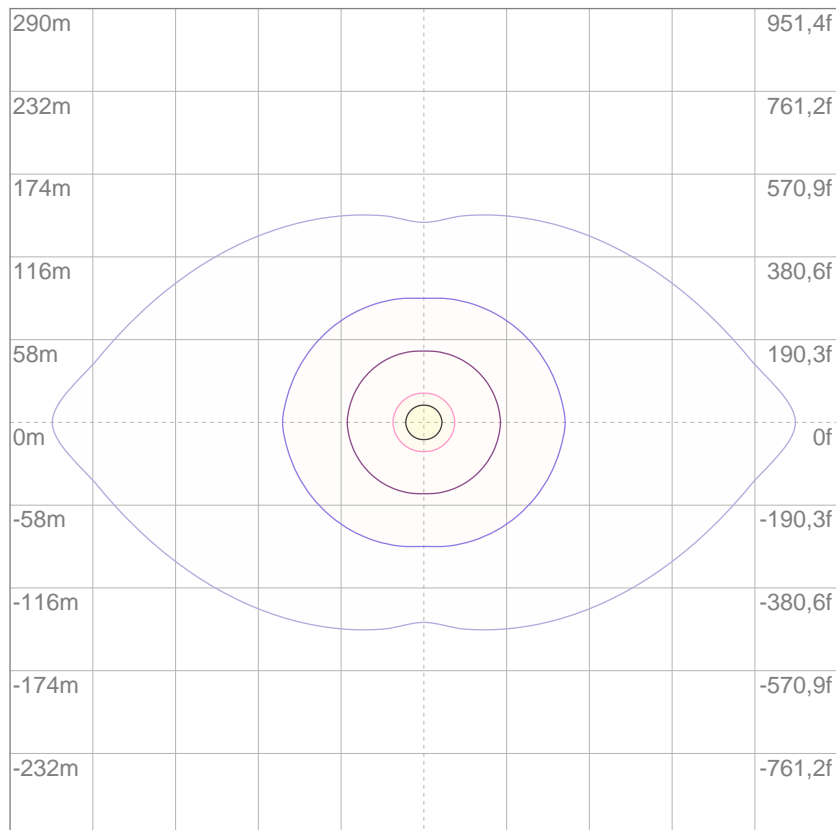

3%	3,91 lx
5%	6,52 lx
10%	13,0 lx
30%	39,1 lx
50%	65,2 lx

Conditions:

Number of c-planes: 4

Lux at center: 130 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

34432 lm

Peak candela output:

13158 cd

Light quality:

CRI: 94,6

Color temperature:

3286 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter LD

Target:


3200K

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:20:26

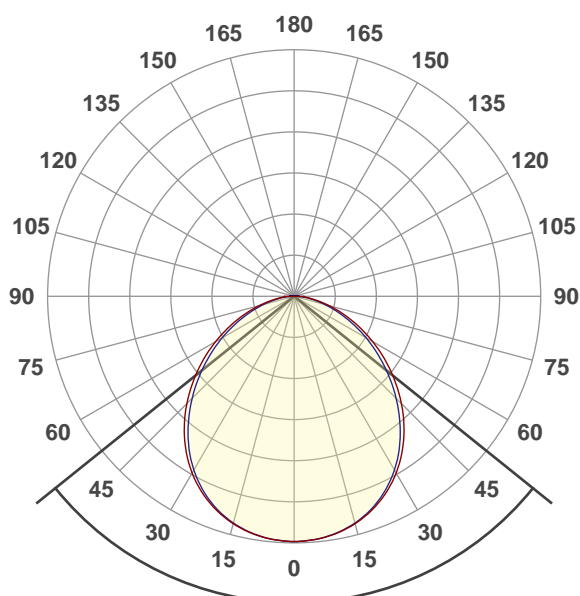




Beam angle 50%: 102,4°

Field angle 10%: 156,8°


Cut off angle 2.5%: 175,3°

Spectra

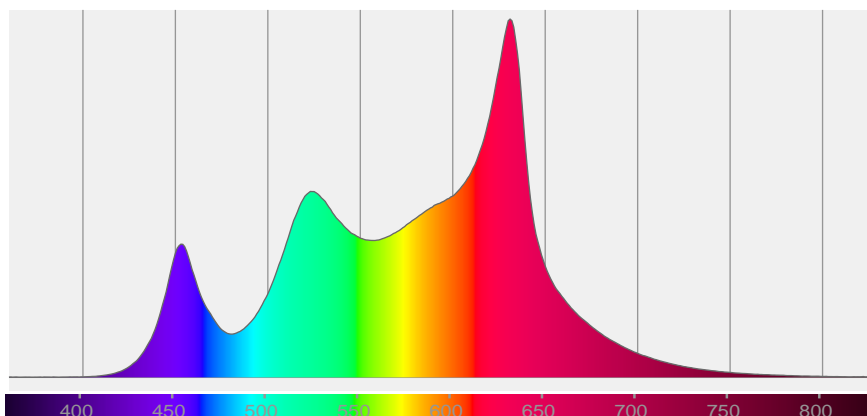


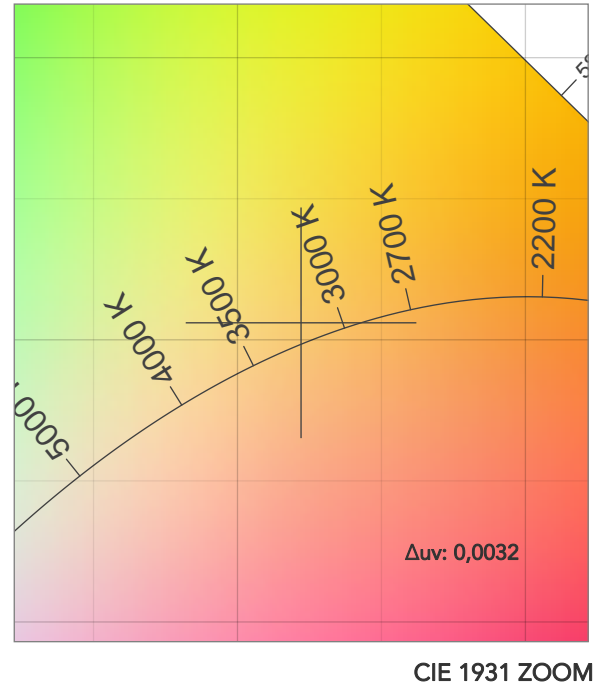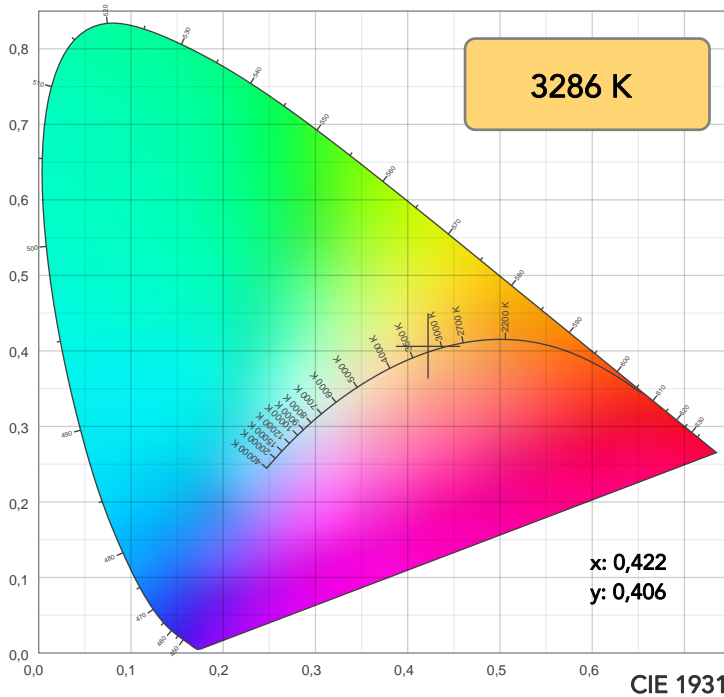

TM30: 92,0

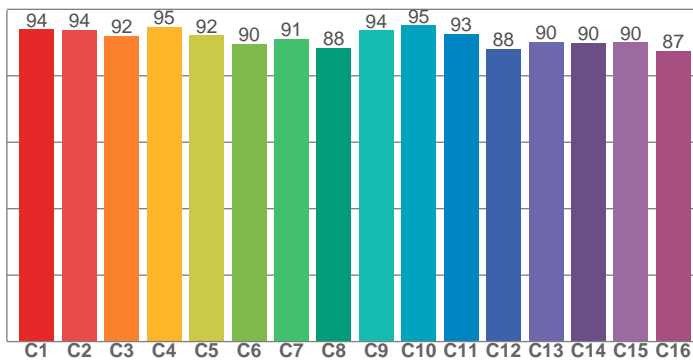

CRI: 94,6 (R1-R8)

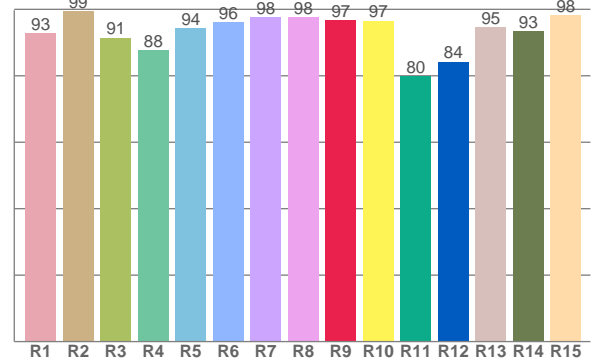

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92,9	99,3	91,4	87,6	94,4	96,1	97,7	97,6	96,8	96,5	79,9	84,2	94,6	93,3	98,2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94,0	93,8	92,0	94,7	92,2	89,6	91,1	88,3	93,7	95,2	92,7	88,1	90,3	90,0	90,0	87,5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94,1	95,7	94,7	95,9	92,0	90,2	95,5	95,3	94,6	94,2	89,8	89,9	91,4	96,6	96,5

CQS: 93,2

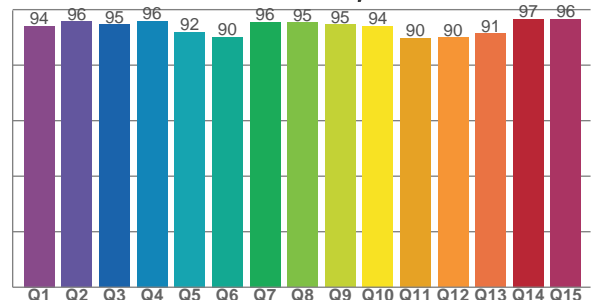

COLOR PARAMETERS

Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
3286 K	94,6	96,8	92,0	103,1	93,2	88	0,422	0,406	0,0032

TM30 DETAILS







Rf 92,0

Fidelity index Rf

Rg 103,1


Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	94	0%	0%
2	94	1%	-2%
3	92	0%	-2%
4	95	-2%	-1%
5	92	-2%	3%
6	90	4%	5%
7	91	2%	2%
8	88	6%	-1%
9	94	3%	0%
10	95	0%	1%
11	93	2%	3%
12	88	5%	-3%
13	90	2%	-6%
14	90	3%	-5%
15	90	1%	-3%
16	87	3%	-7%

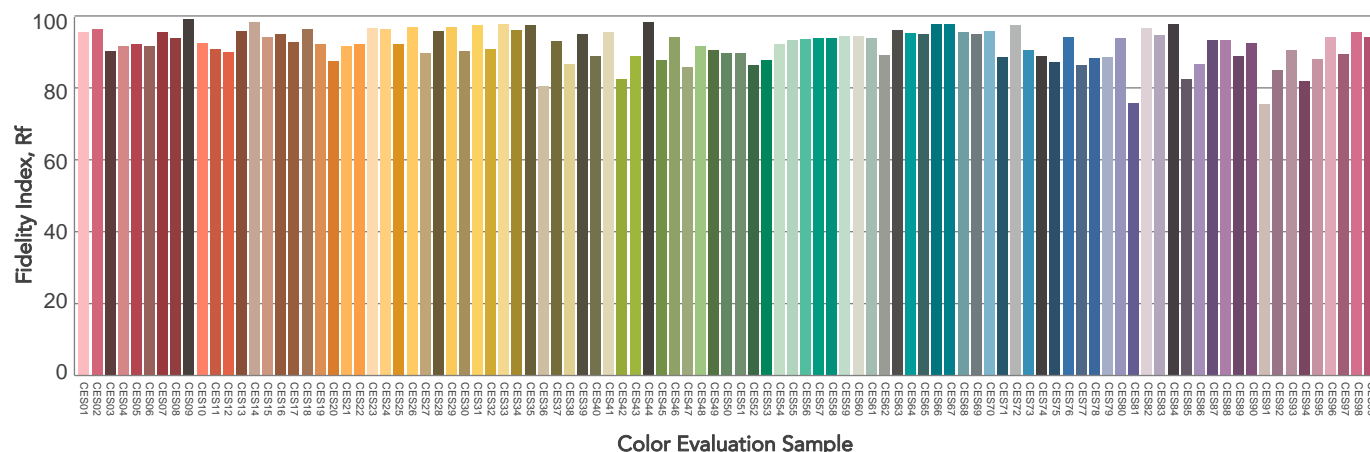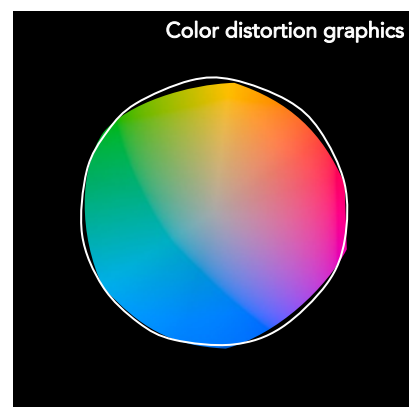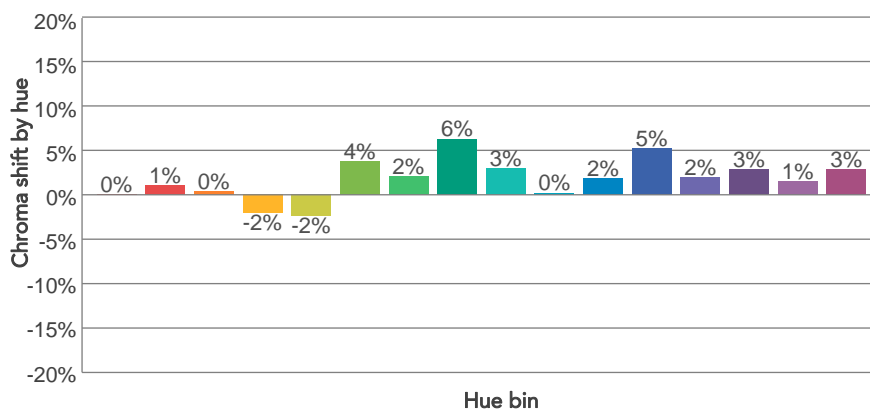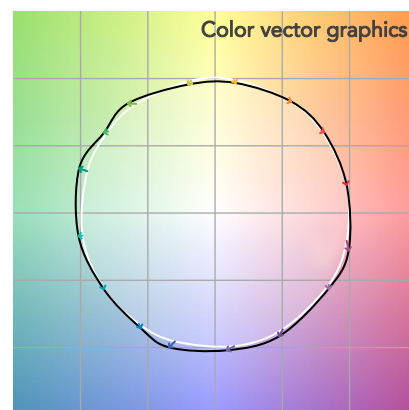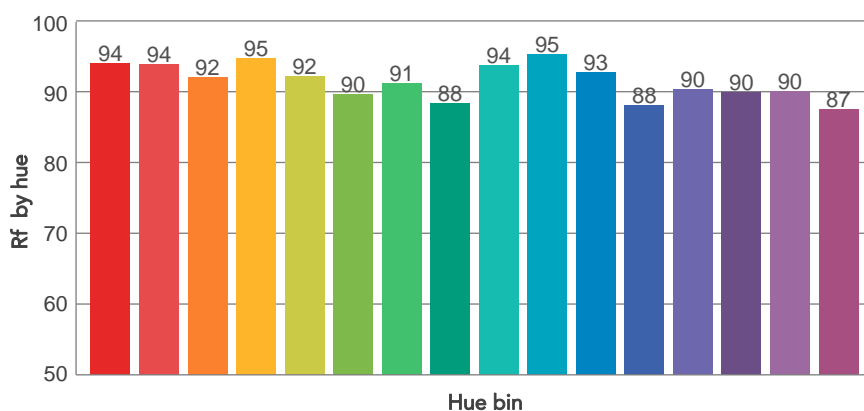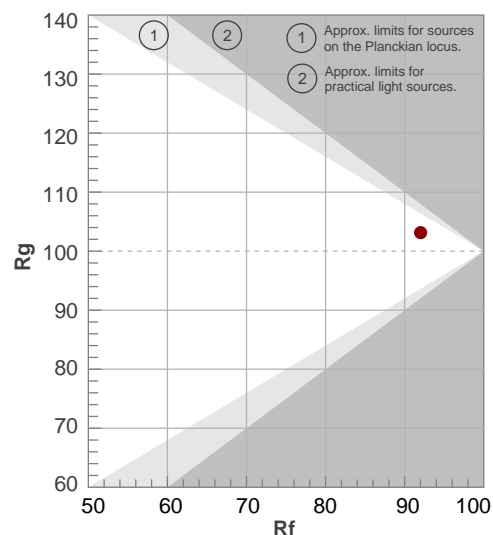

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,4°	156,8°	175,3°	80,2%	56,7%

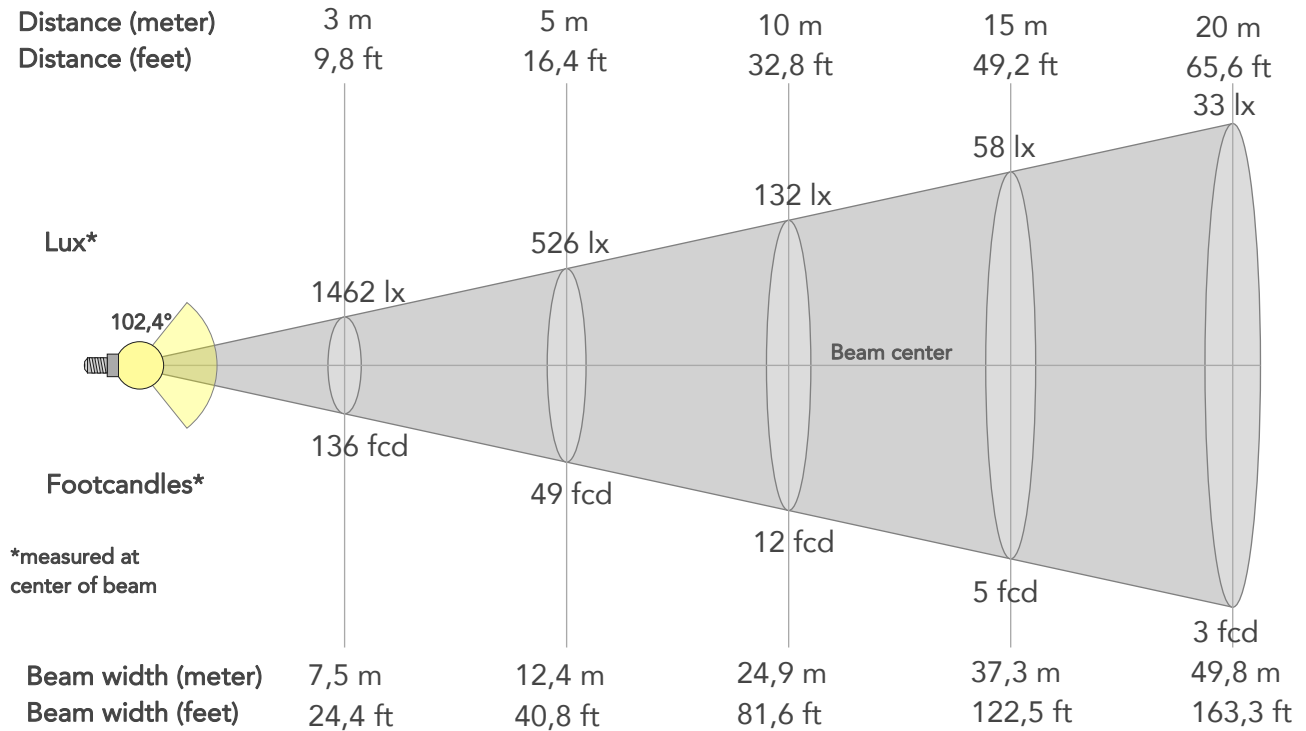

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	13158lx	3289lx	1462lx	822lx	526lx	234lx	132lx	58lx	33lx	21lx	15lx	8lx	5lx
Footcand.	1222fcd	306fcd	136fcd	76fcd	49fcd	22fcd	12fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,5m	10m	12,4m	18,7m	24,9m	37,3m	49,8m	62,2m	74,7m	99,6m	124,5m
Beam wid.	8,2ft	16,4ft	24,4ft	32,6ft	40,8ft	61,2ft	81,6ft	122,5ft	163,3ft	204,1ft	244,9ft	326,6ft	408,2ft


LINEAR DISTRIBUTION DIAGRAM

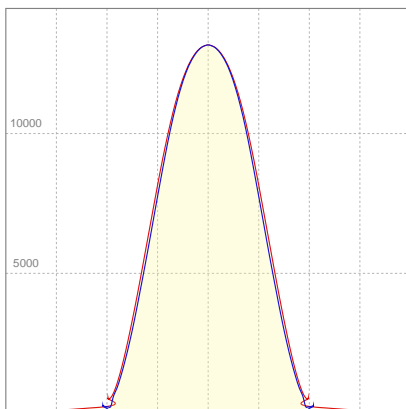

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
224V	2,05A	438,8W	78lm/W

ISO CANDELA DIAGRAM

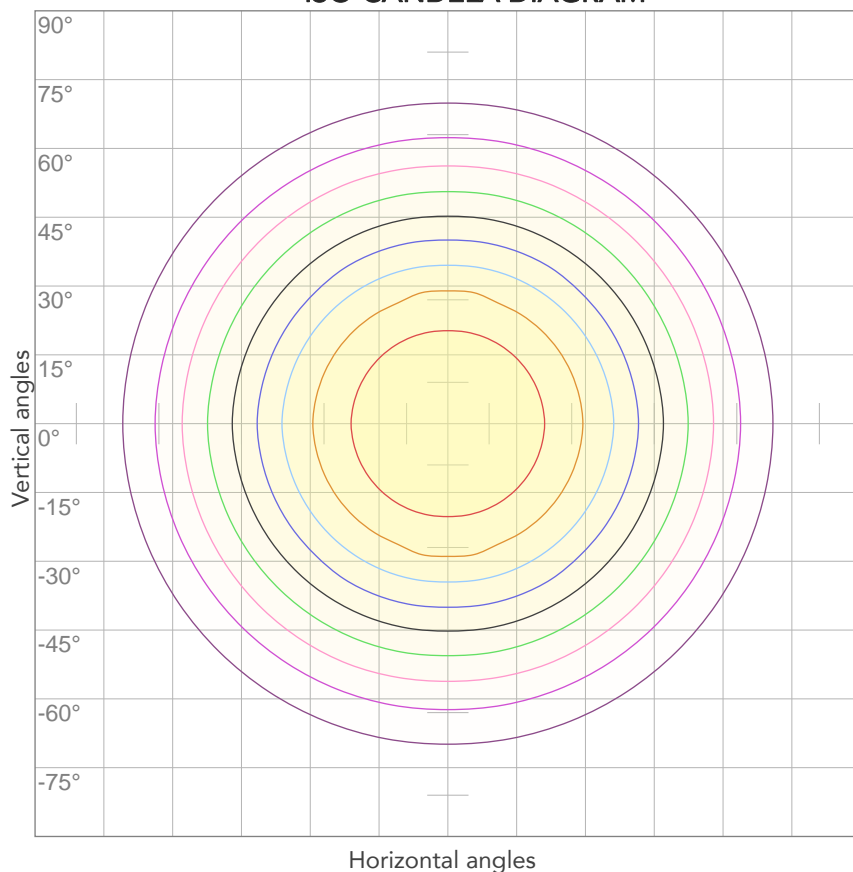


10%	1316 cd
20%	2632 cd
30%	3947 cd
40%	5263 cd
50%	6579 cd
60%	7895 cd
70%	9211 cd
80%	10526 cd

Conditions:

Number of c-planes: 4

Candela at center: 13158 cd

ISO LUX DIAGRAM

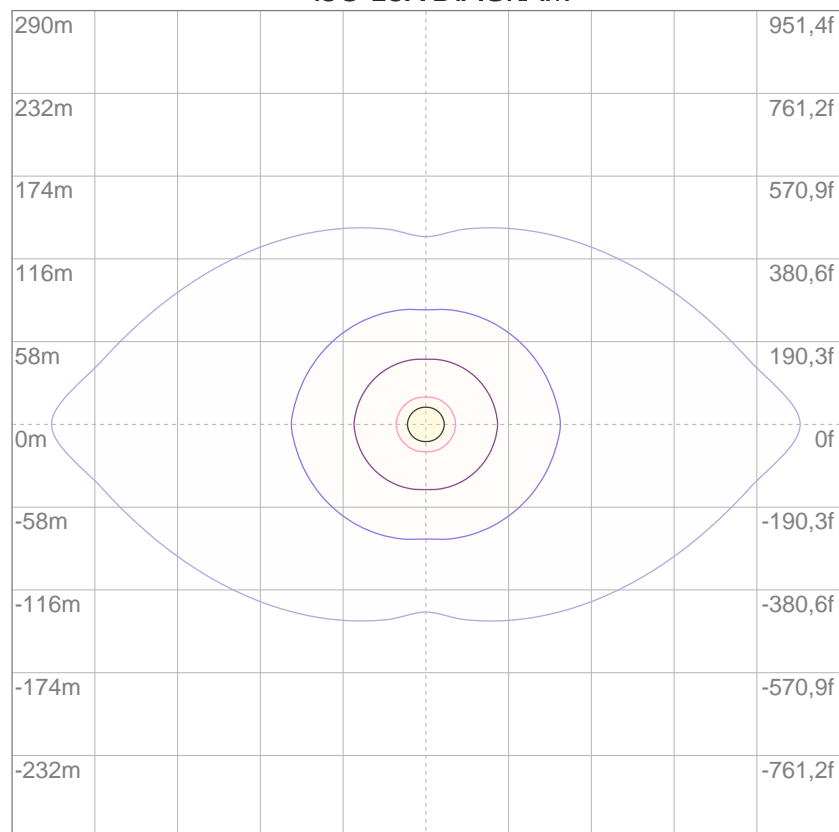

3%	3,95 lx
5%	6,58 lx
10%	13,2 lx
30%	39,5 lx
50%	65,8 lx

Conditions:

Number of c-planes: 4

Lux at center: 132 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

30008 lm

Peak candela output:

18084 cd

Light quality:

CRI: 90,3

Color temperature:

3222 K

PRODUCT NAME:

ECLPANEL TWC

MEASUREMENT CONDITIONS:

Beam angle:

Filter Int.

Target:


3200K

Operator:

Paolo Carvone

Date and time:

14/08/2020 10:35:00

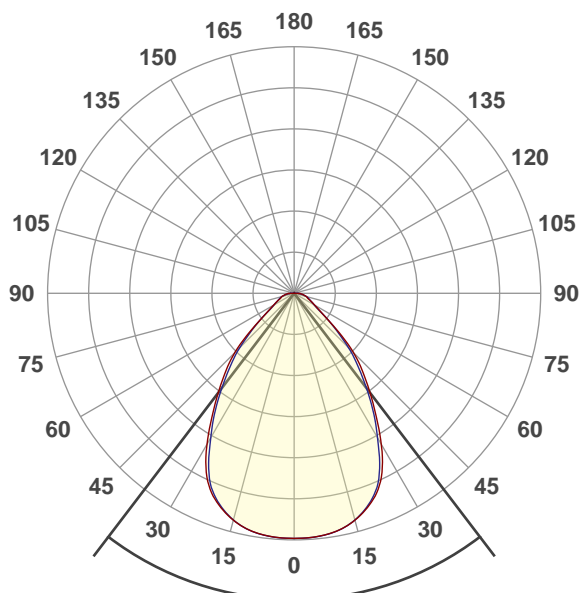




Beam angle 50%: 74,7°

Field angle 10%: 118,3°


Cut off angle 2.5%: 170,7°

Spectra

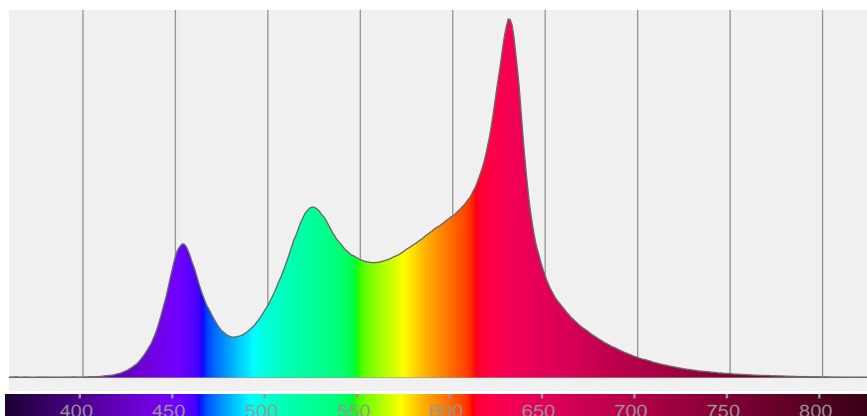


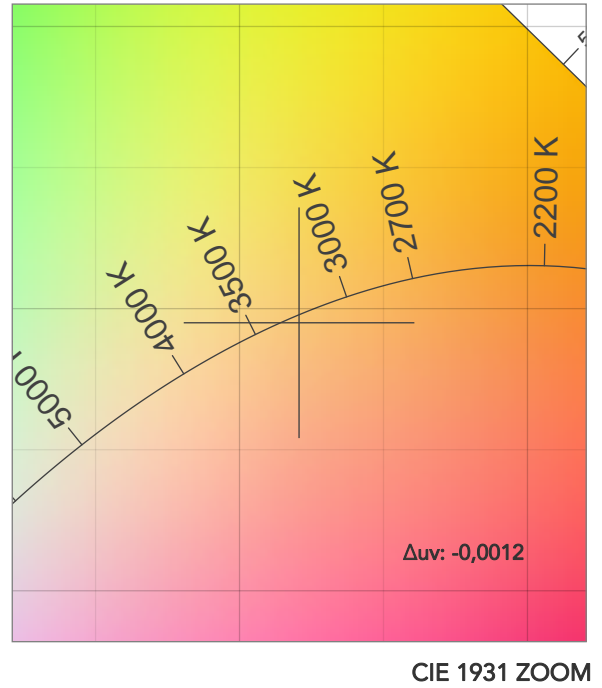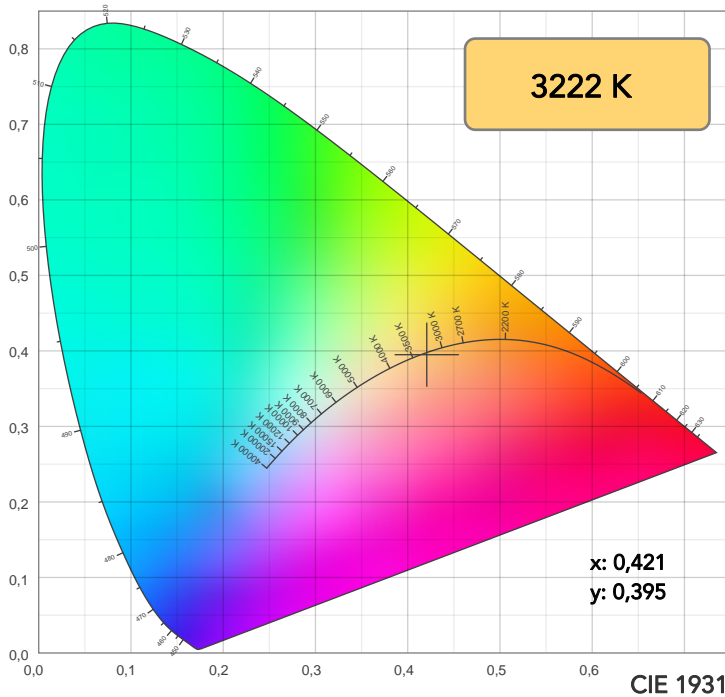

TM30: 90,6

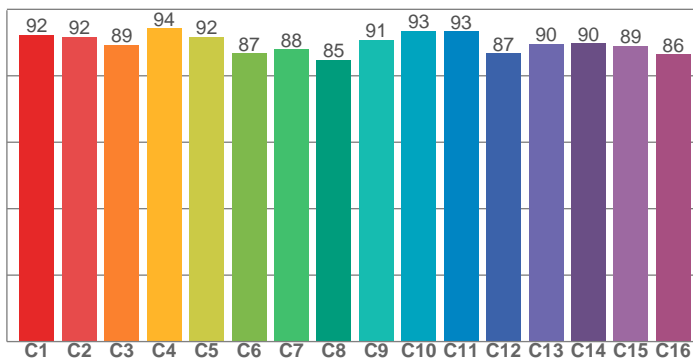

CRI: 90,3 (R1-R8)

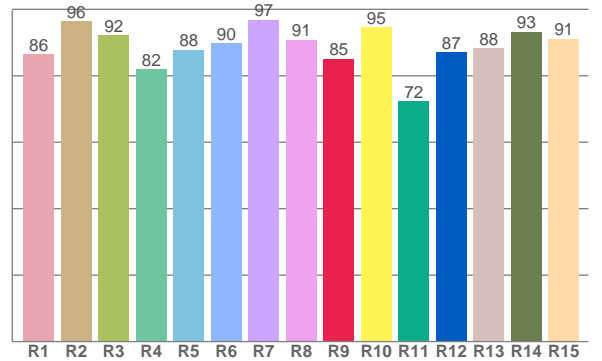

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
86,5	96,4	92,1	81,9	87,8	89,9	96,8	90,9	85,1	94,7	72,3	87,1	88,3	93,2	91,2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,3	91,7	89,4	94,3	91,7	86,8	87,9	84,7	90,7	93,5	93,3	86,7	89,6	89,8	89,1	86,4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
95,8	95,7	94,7	93,8	89,5	87,7	94,1	95,1	94,8	98,4	90,9	89,2	90,7	93,9	95,0

CQS: 92,6

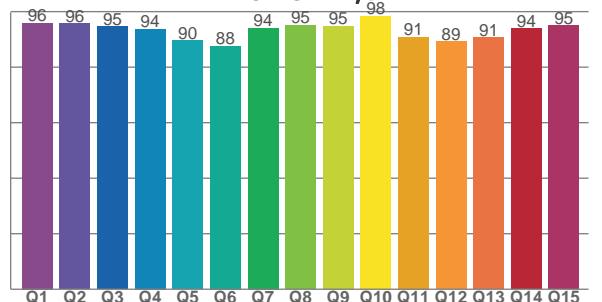

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
3222 K	90,3	85,1	90,6	105,8	92,6	85	0,421	0,395	-0,0012

TM30 DETAILS

Rf 90,6
Fidelity index Rf

Rg 105,8
Gammut index


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	2%	0%
2	92	3%	-2%
3	89	2%	-2%
4	94	-1%	-2%
5	92	-2%	3%
6	87	6%	6%
7	88	4%	3%
8	85	8%	-2%
9	91	5%	-1%
10	93	2%	-1%
11	93	3%	2%
12	87	6%	-5%
13	90	2%	-7%
14	90	3%	-4%
15	89	2%	0%
16	86	5%	-8%

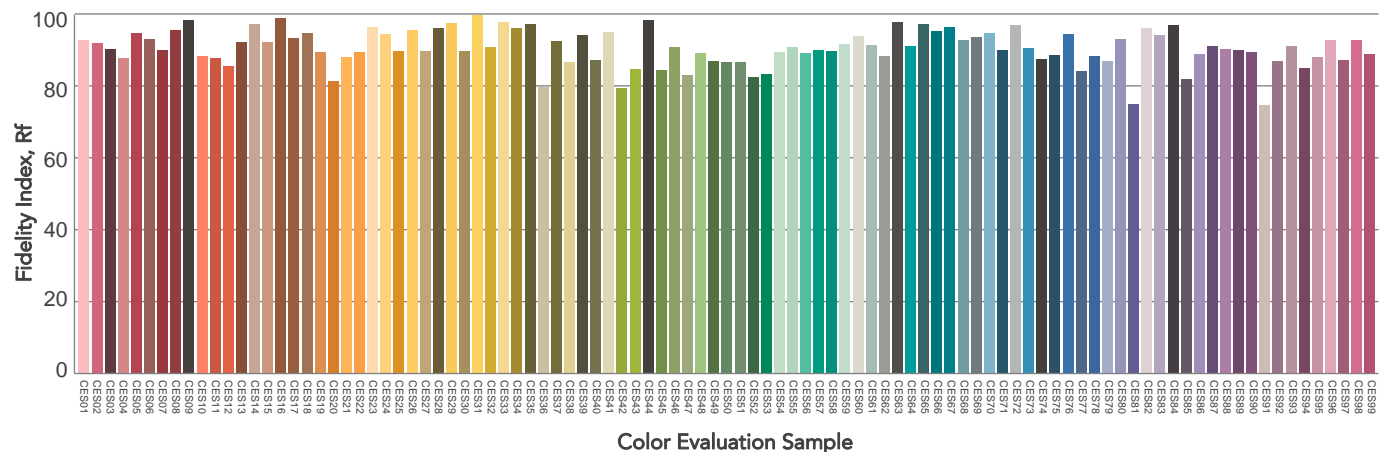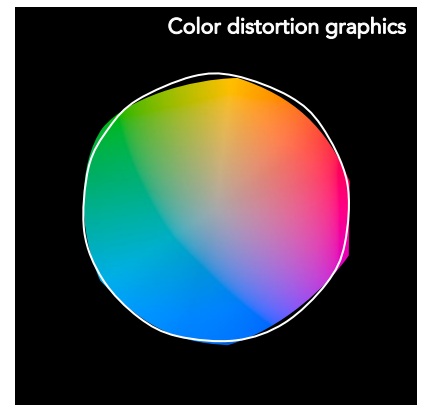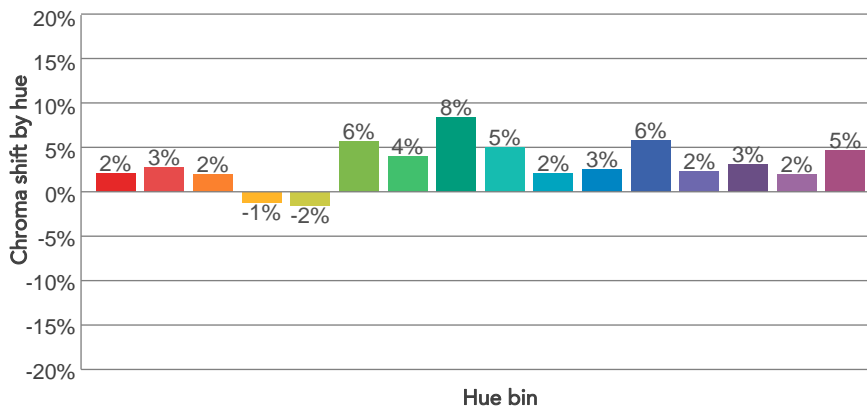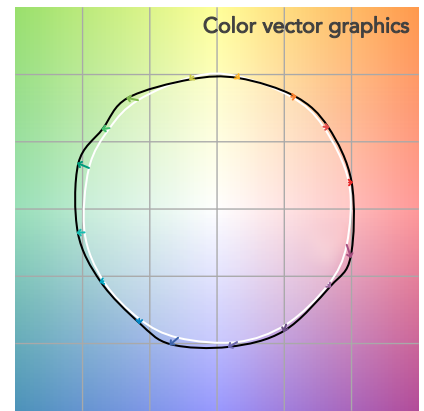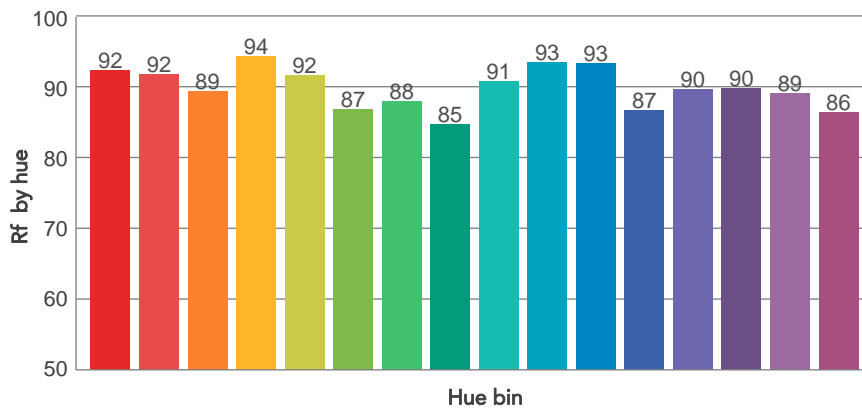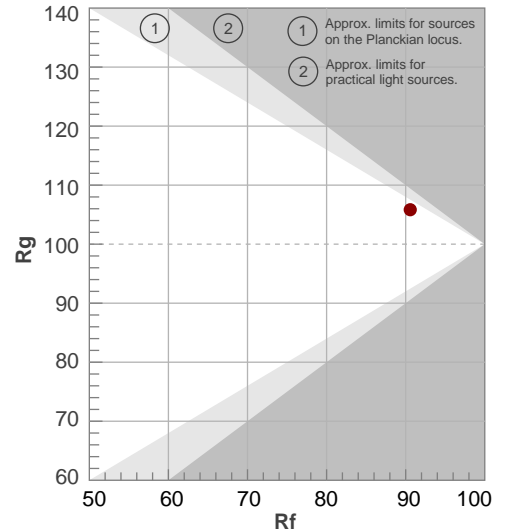

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
74,7°	118,3°	170,7°	88,2%	74,2%

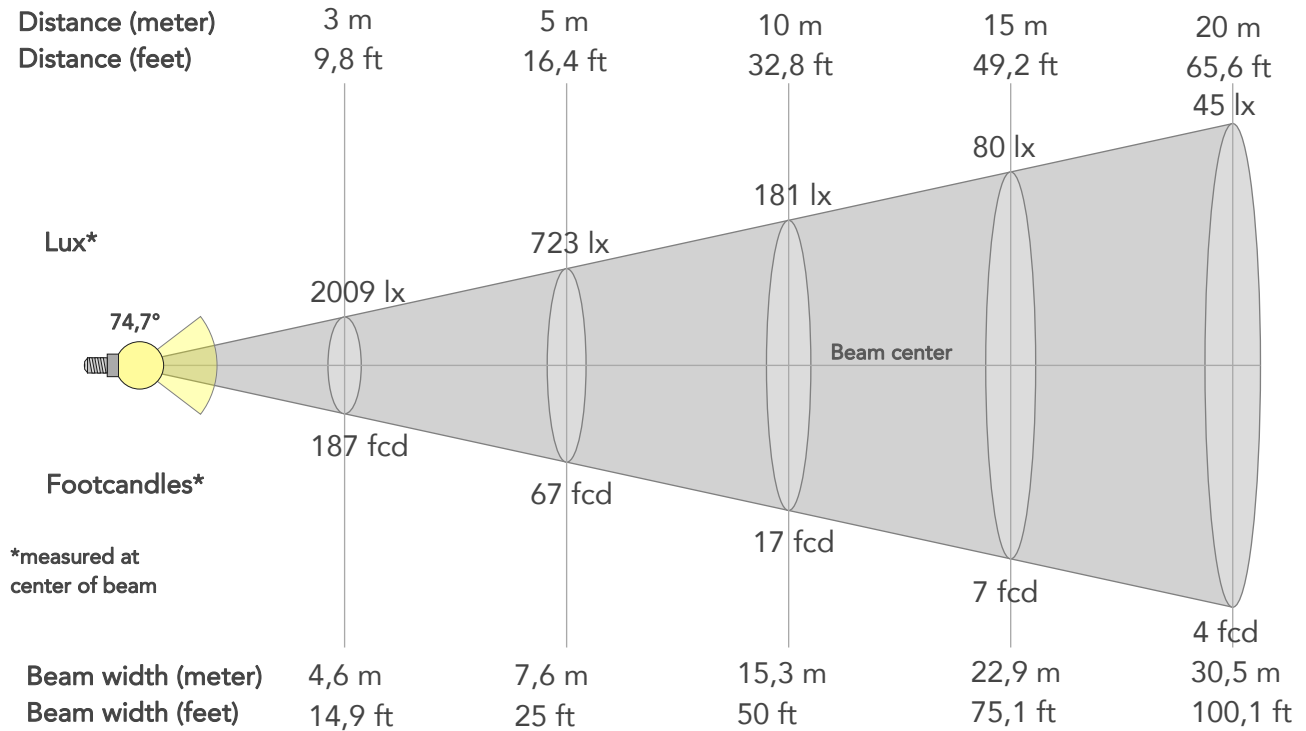

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	18083lx	4521lx	2009lx	1130lx	723lx	321lx	181lx	80lx	45lx	29lx	20lx	11lx	7lx
Footcand.	1680fcd	420fcd	187fcd	105fcd	67fcd	30fcd	17fcd	7fcd	4fcd	3fcd	2fcd	1fcd	1fcd
Beam wid.	1,5m	3,1m	4,6m	6,1m	7,6m	11,4m	15,3m	22,9m	30,5m	38,1m	45,8m	61m	76,3m
Beam wid.	5ft	10,1ft	14,9ft	20ft	25ft	37,5ft	50ft	75,1ft	100,1ft	125,1ft	150,1ft	200,1ft	250,2ft


LINEAR DISTRIBUTION DIAGRAM

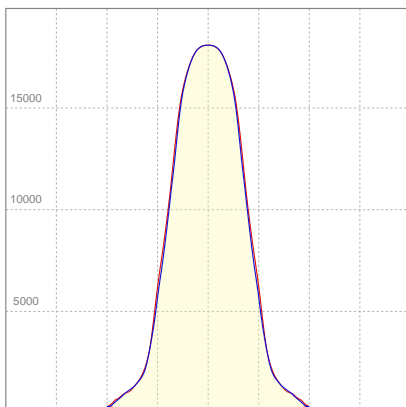

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	2,04A	444,2W	68lm/W

ISO CANDELA DIAGRAM

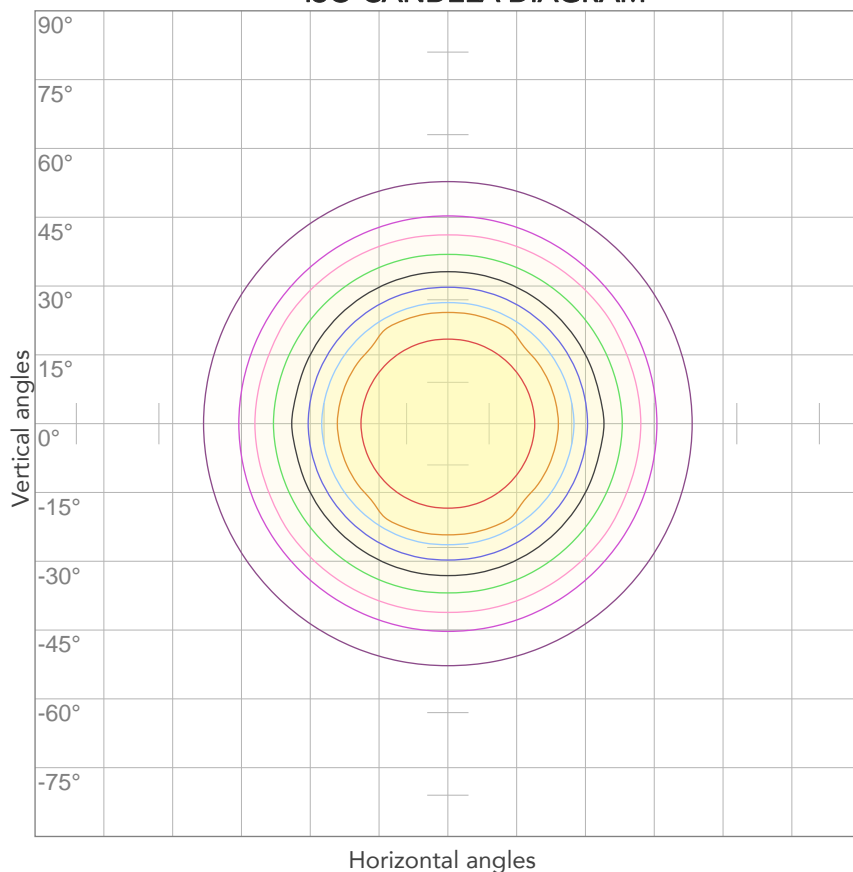


10%	1808 cd
20%	3617 cd
30%	5425 cd
40%	7233 cd
50%	9042 cd
60%	10850 cd
70%	12658 cd
80%	14467 cd

Conditions:

Number of c-planes: 4

Candela at center: 18083 cd

ISO LUX DIAGRAM

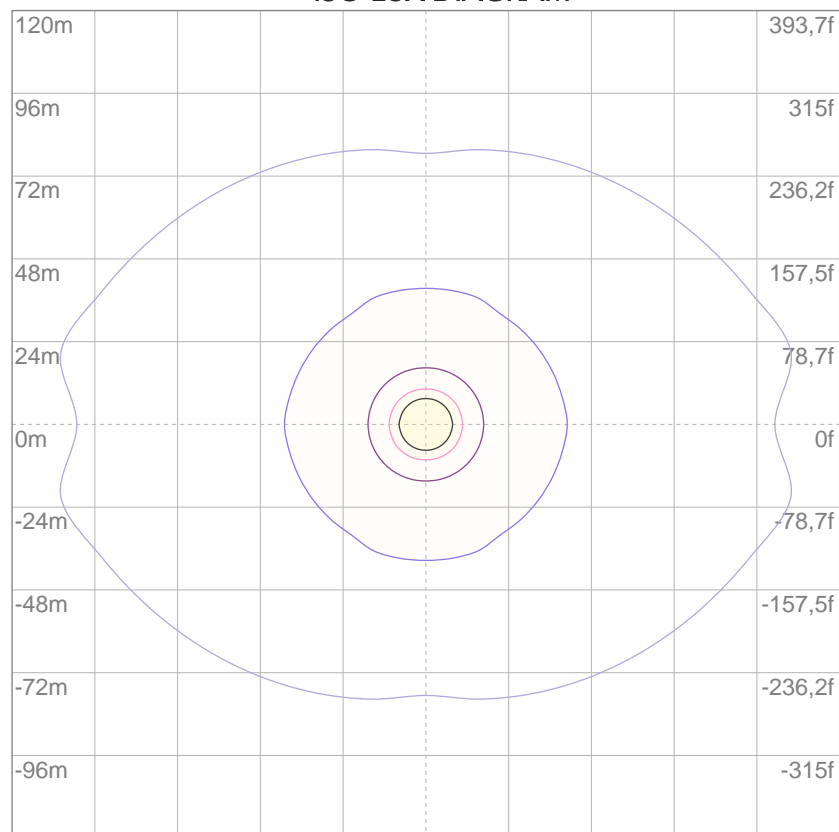

3%	5,42 lx
5%	9,04 lx
10%	18,1 lx
30%	54,2 lx
50%	90,4 lx

Conditions:

Number of c-planes: 4

Lux at center: 181 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

29235 lm

Peak candela output:

9969 cd

Light quality:

CRI: 94,2

Color temperature:

4247 K

PRODUCT NAME:

ECLPANEL TWC

MEASUREMENT CONDITIONS:

Beam angle:

Filter HD

Target:


4000K

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:04:10

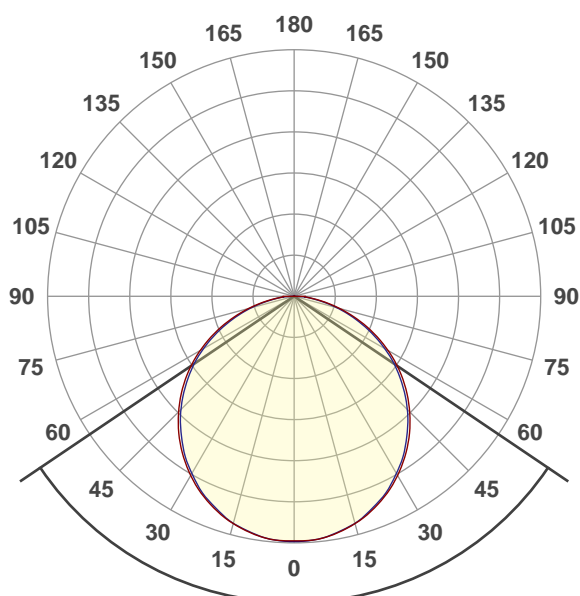




Beam angle 50%: 111,9°

Field angle 10%: 161,8°


Cut off angle 2.5%: 176,4°

Spectra

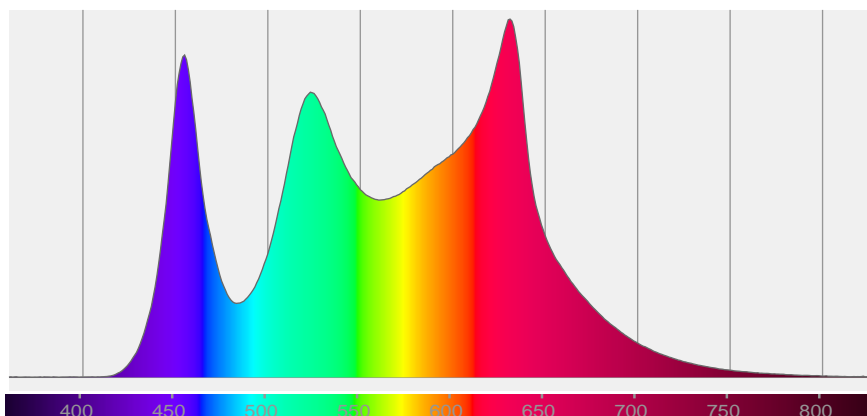


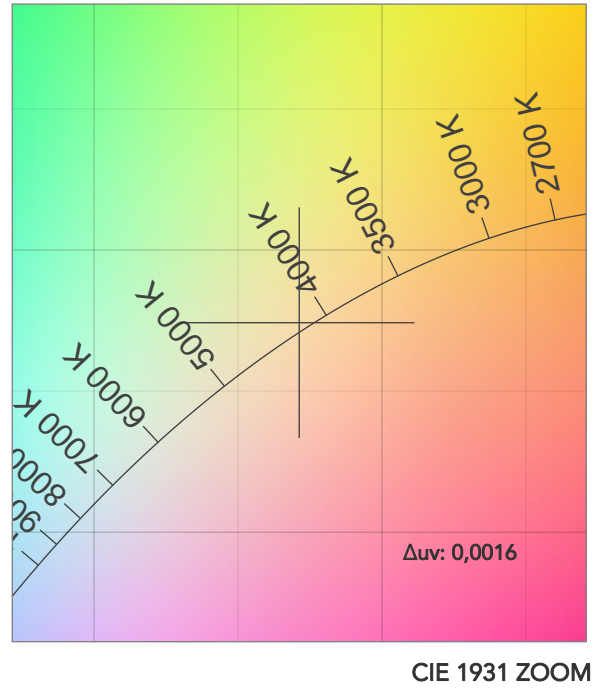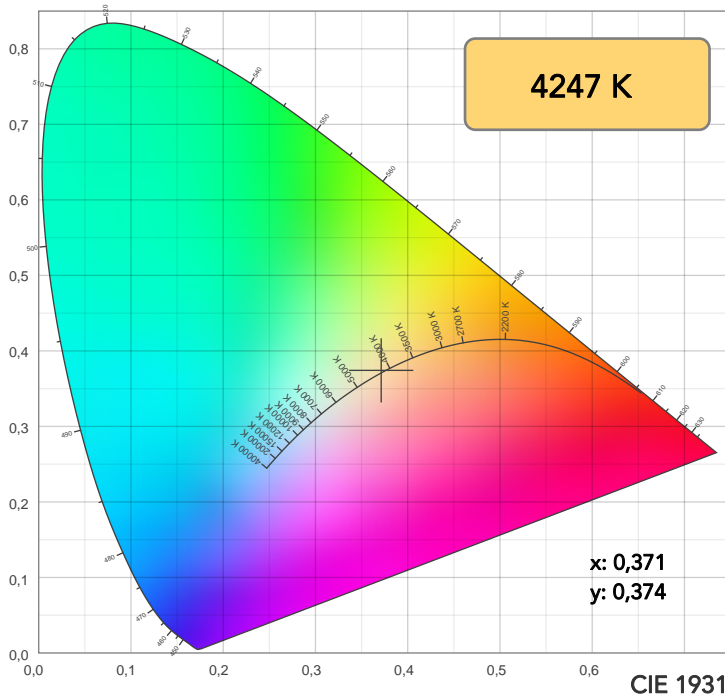

TM30: 90,5

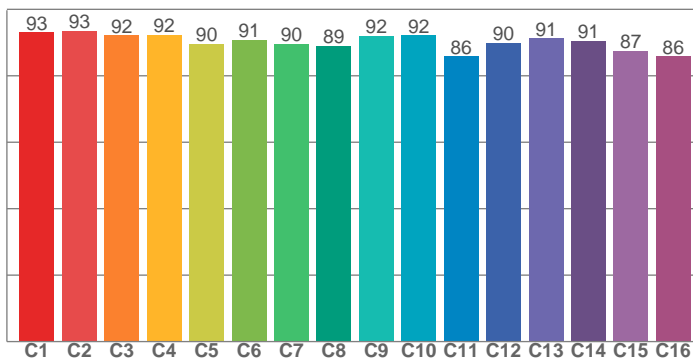

CRI: 94,2 (R1-R8)

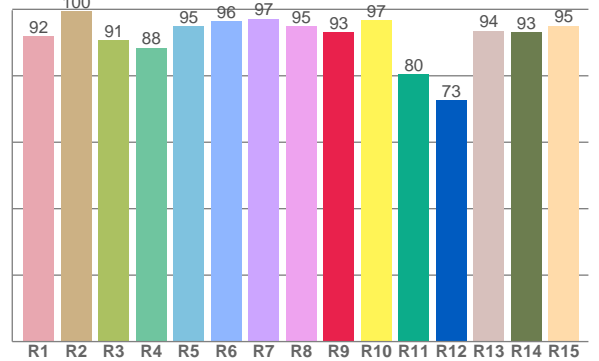

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
91,9	99,5	90,7	88,5	94,9	96,4	97,2	94,9	93,1	96,7	80,5	72,7	93,6	93,2	95,0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
93,1	93,5	92,2	92,3	89,6	90,8	89,5	89,0	91,9	92,2	85,8	90,0	91,2	90,6	87,5	85,8

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94,3	98,4	90,4	96,5	97,0	93,9	96,1	96,8	95,1	98,3	93,4	91,6	92,5	96,8	96,3

CQS: 94,6

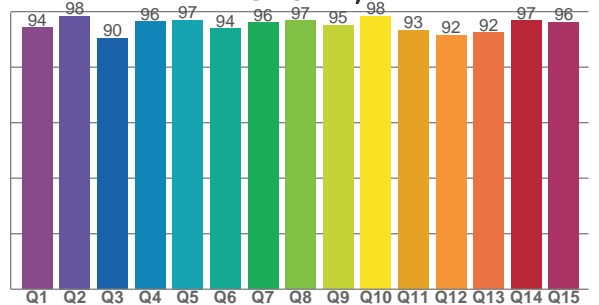

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
4247 K	94,2	93,1	90,5	103,4	94,6	90	0,371	0,374	0,0016

TM30 DETAILS

Rf 90,5
Fidelity index Rf

Rg 103,4
Gammut index


		Graphic shifts (%)	
Hue Bin	R _f	Chroma	Hue
1	93	1%	0%
2	93	2%	-2%
3	92	1%	-2%
4	92	-3%	-2%
5	90	-4%	1%
6	91	3%	4%
7	90	3%	3%
8	89	3%	2%
9	92	2%	4%
10	92	0%	4%
11	86	4%	7%
12	90	4%	2%
13	91	4%	-4%
14	91	1%	4%
15	87	4%	-3%
16	86	4%	-5%

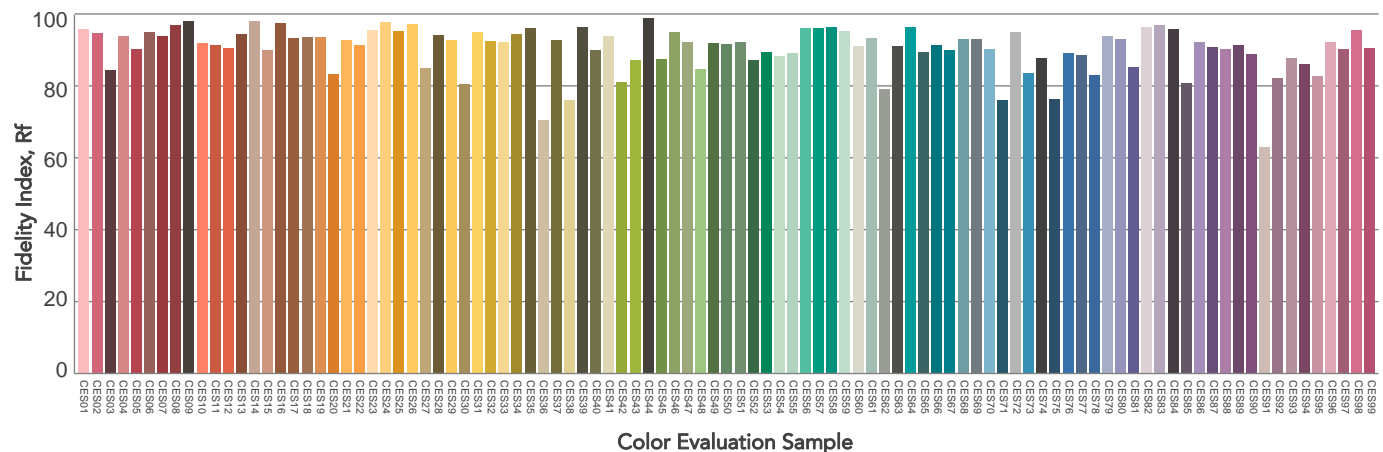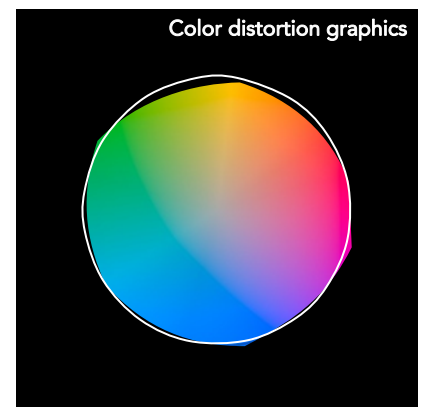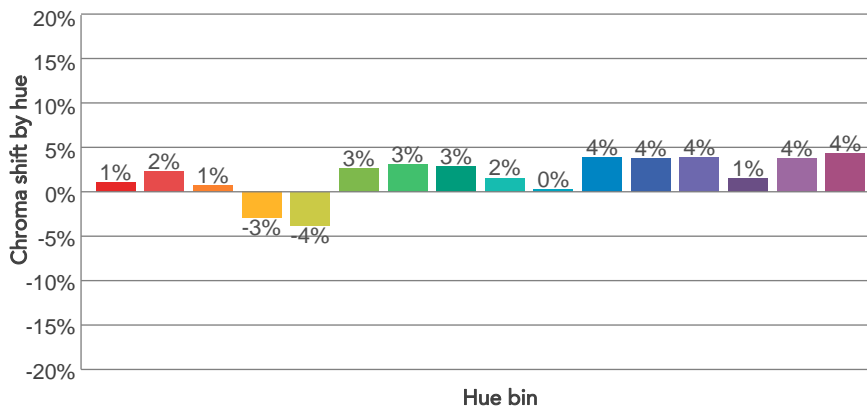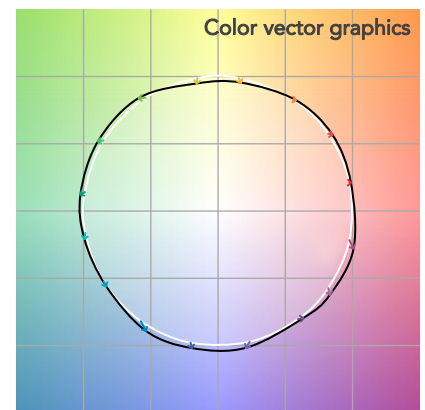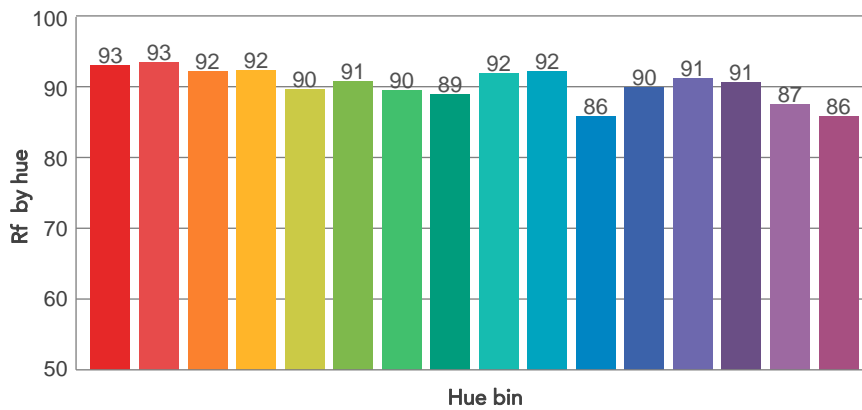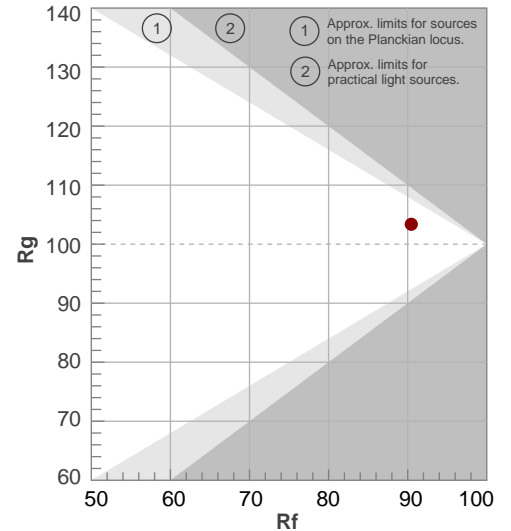

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
111,9°	161,8°	176,4°	76,2%	51,9%

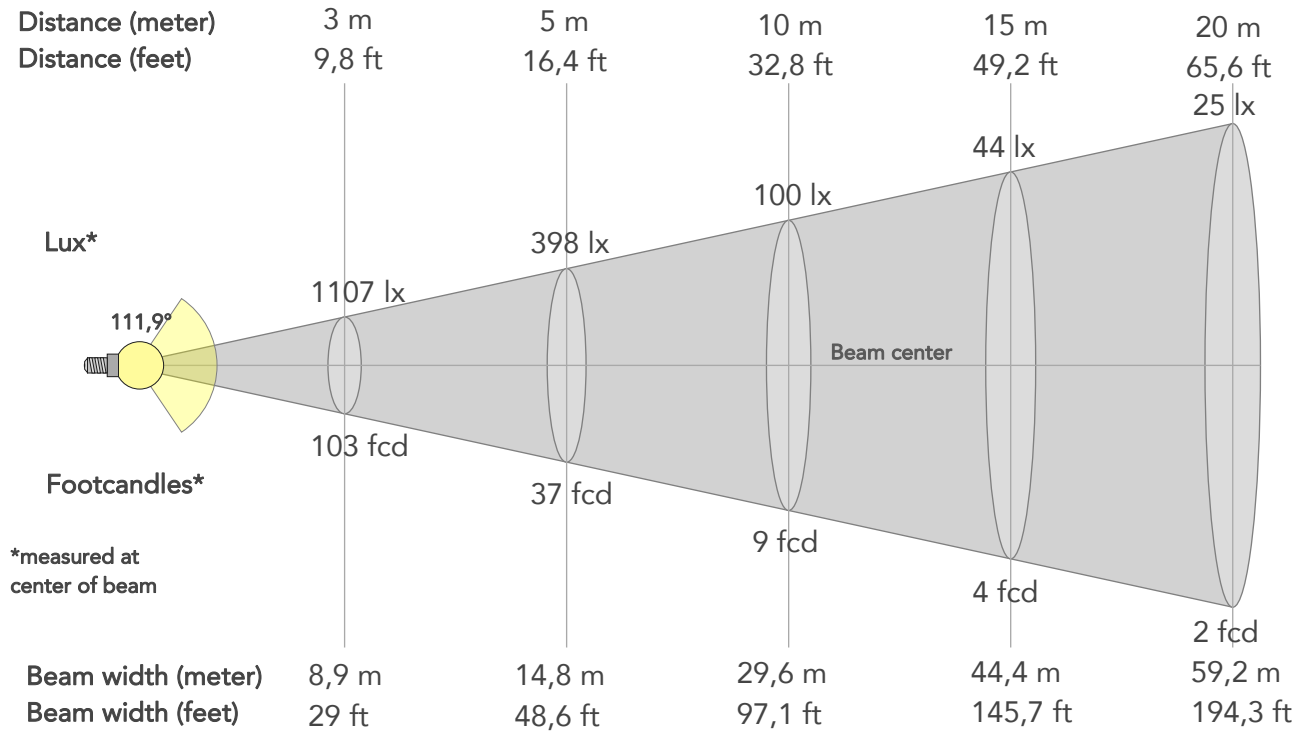

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	9960lx	2490lx	1107lx	622lx	398lx	177lx	100lx	44lx	25lx	16lx	11lx	6lx	4lx
Footcand.	925fcd	231fcd	103fcd	58fcd	37fcd	16fcd	9fcd	4fcd	2fcd	1fcd	1fcd	1fcd	0fcd
Beam wid.	3m	5,9m	8,9m	11,8m	14,8m	22,2m	29,6m	44,4m	59,2m	74m	88,8m	118,4m	148,1m
Beam wid.	9,8ft	19,5ft	29ft	38,8ft	48,6ft	72,8ft	97,1ft	145,7ft	194,3ft	242,8ft	291,4ft	388,5ft	485,6ft


LINEAR DISTRIBUTION DIAGRAM

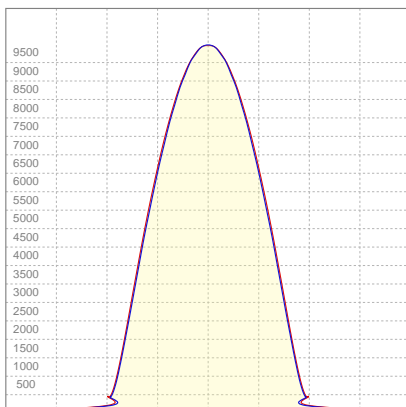

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
224V	2,05A	439,9W	66lm/W

ISO CANDELA DIAGRAM

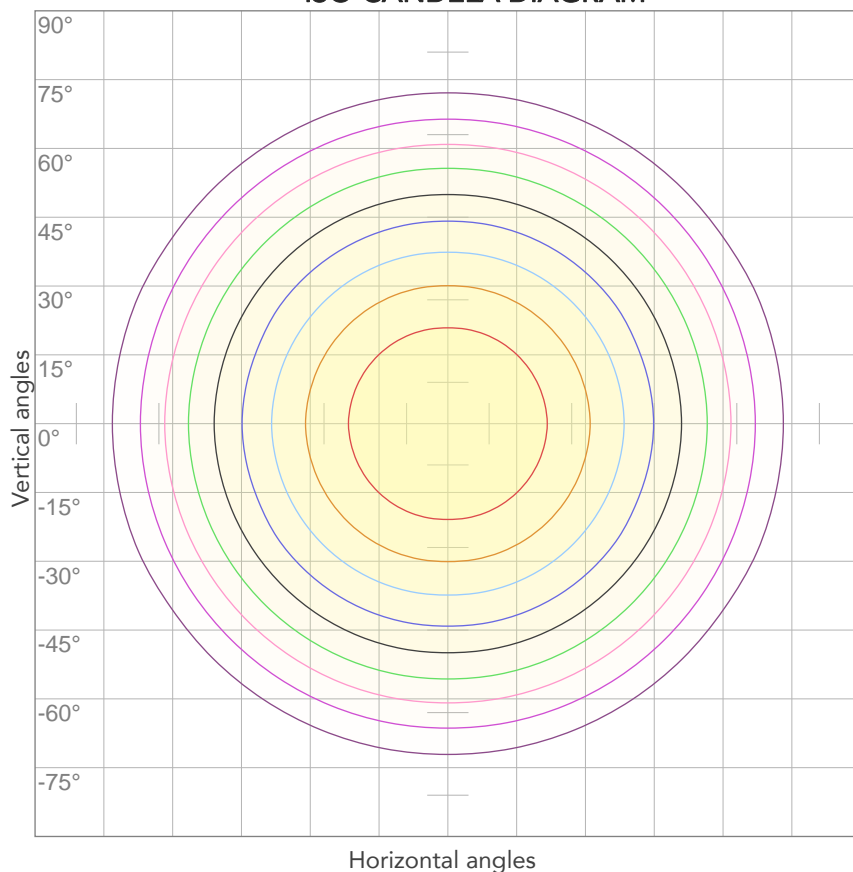


10%	996 cd
20%	1992 cd
30%	2988 cd
40%	3984 cd
50%	4980 cd
60%	5976 cd
70%	6972 cd
80%	7968 cd

Conditions:

Number of c-planes: 4

Candela at center: 9960 cd

ISO LUX DIAGRAM

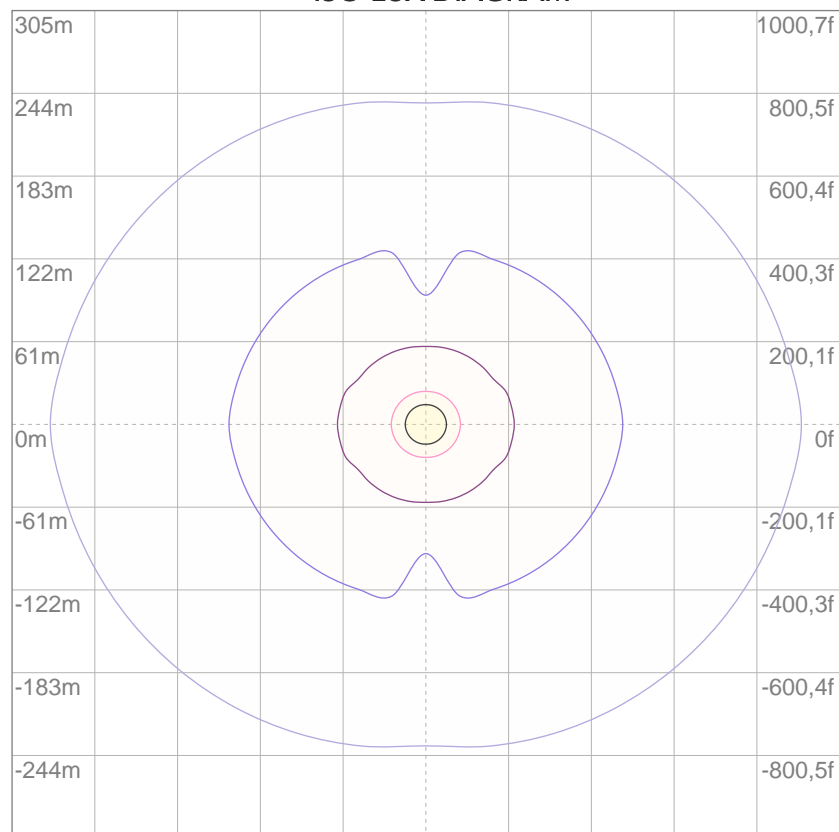

3%	2,99 lx
5%	4,98 lx
10%	9,96 lx
30%	29,9 lx
50%	49,8 lx

Conditions:

Number of c-planes: 4

Lux at center: 99,6 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

34236 lm

Peak candela output:

12939 cd

Light quality:

CRI: 95,9

Color temperature:

4158 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter MD

Target:


4000K

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:41:00

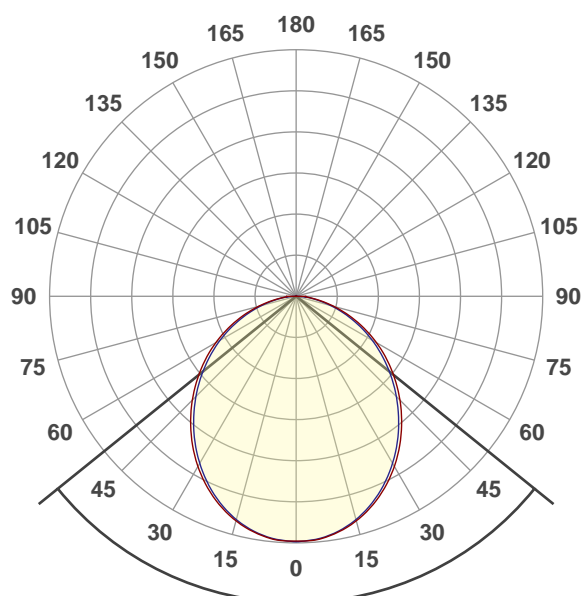




Beam angle 50%: 102,2°

Field angle 10%: 158,6°


Cut off angle 2.5%: 175,9°

Spectra

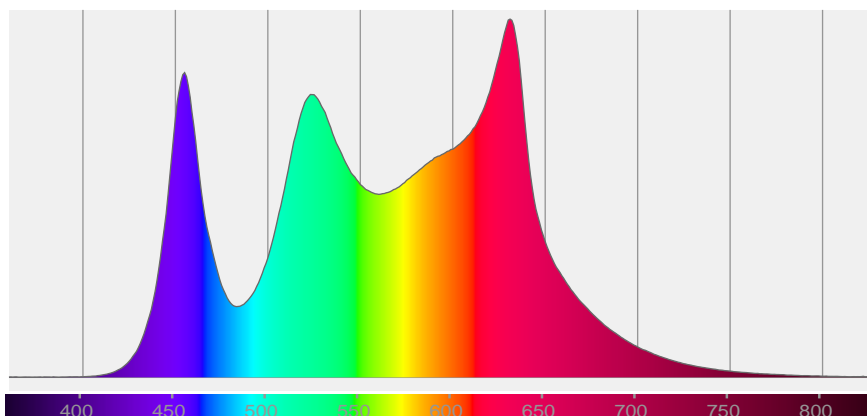


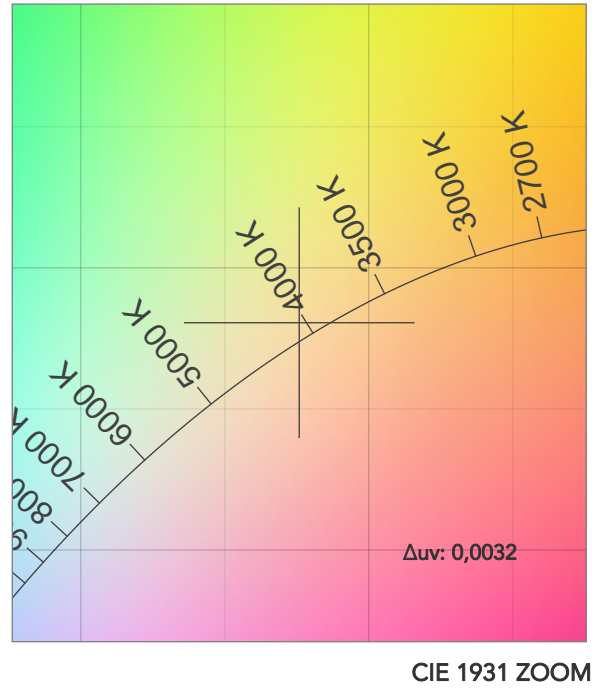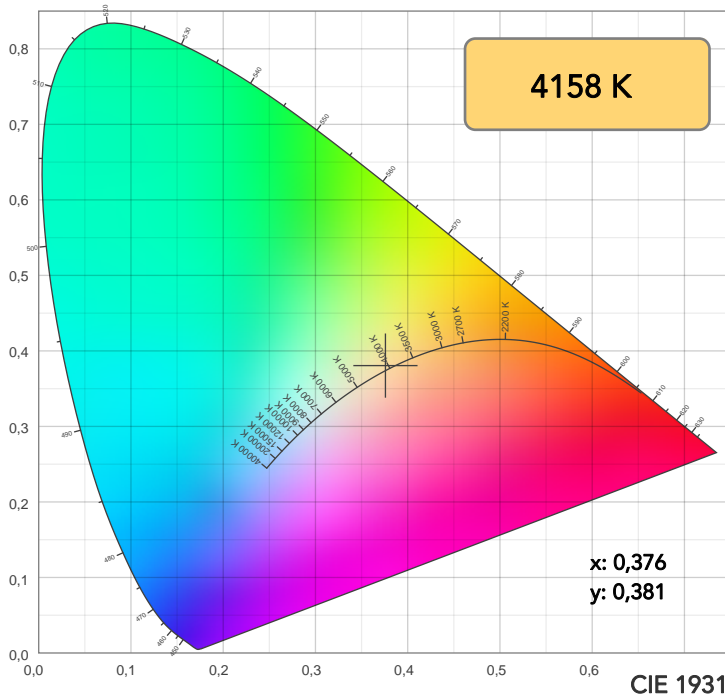

TM30: 90,8

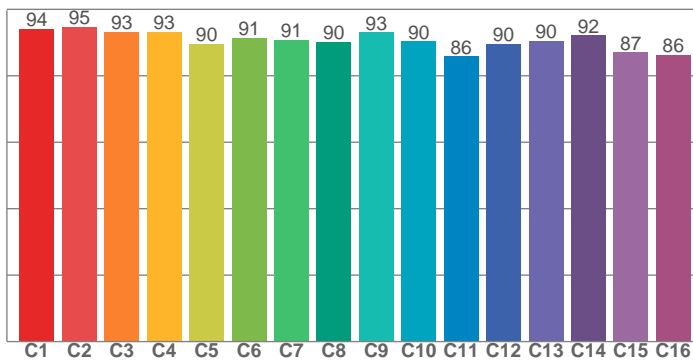

CRI: 95,9 (R1-R8)

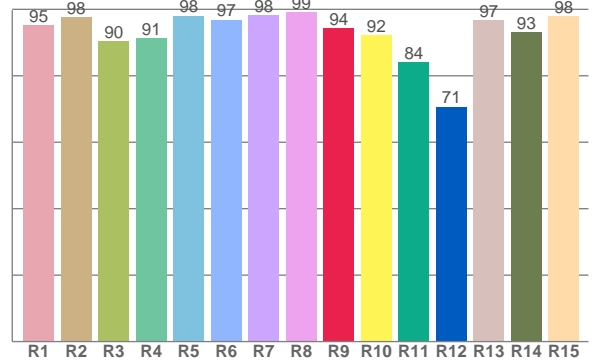

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,3	97,6	90,4	91,2	98,1	96,8	98,1	99,2	94,4	92,3	84,0	70,7	96,7	93,2	97,8


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94,1	94,7	93,2	93,2	89,6	91,4	90,7	90,3	93,0	90,4	85,9	89,7	90,5	92,1	87,1	86,4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93,7	98,1	89,6	95,0	98,2	94,2	95,2	98,0	95,4	97,2	94,2	93,2	93,7	97,7	96,8

CQS: 94,8

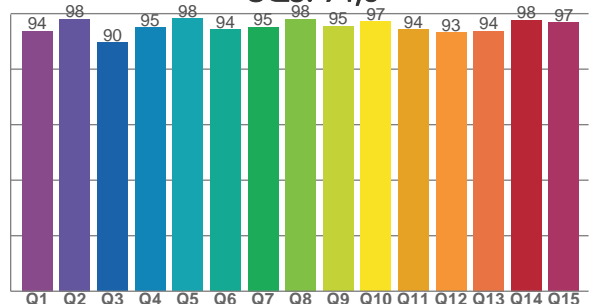

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
4158 K	95,9	94,4	90,8	102,2	94,8	89	0,376	0,381	0,0032

TM30 DETAILS

Rf 90,8
Fidelity index Rf


Rg 102,2
Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	94	0%	0%
2	95	1%	-2%
3	93	0%	-1%
4	93	-3%	-1%
5	90	-3%	2%
6	91	2%	4%
7	91	2%	2%
8	90	2%	2%
9	93	1%	4%
10	90	-1%	5%
11	86	4%	7%
12	90	4%	2%
13	90	4%	-4%
14	92	2%	3%
15	87	3%	-5%
16	86	3%	-6%

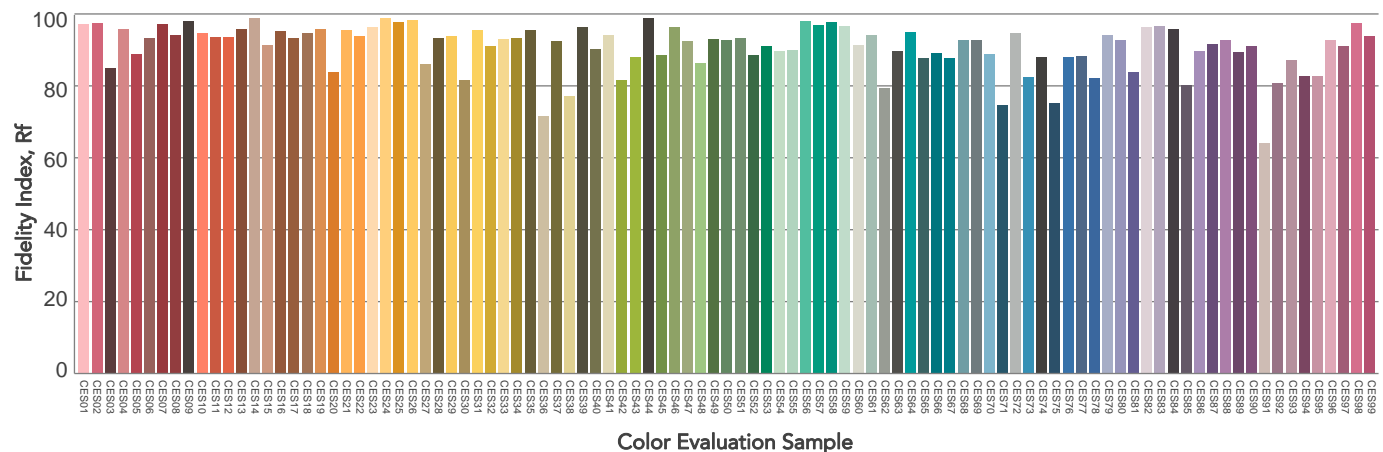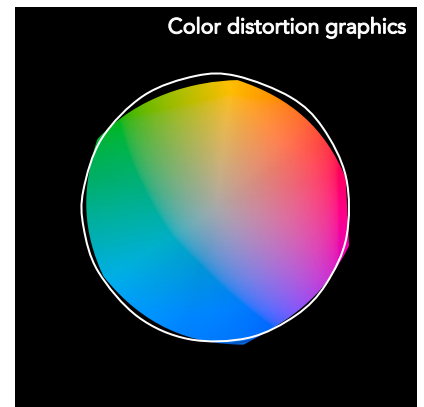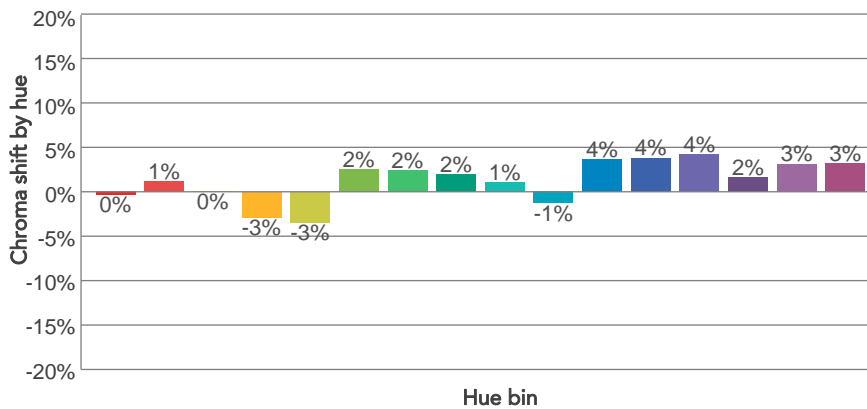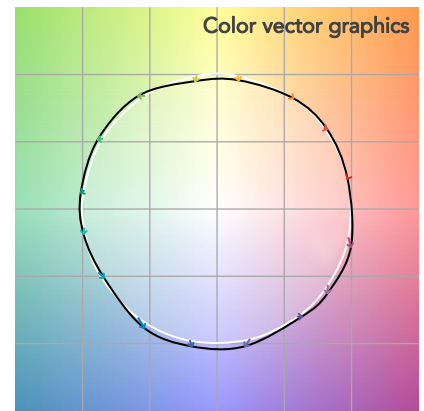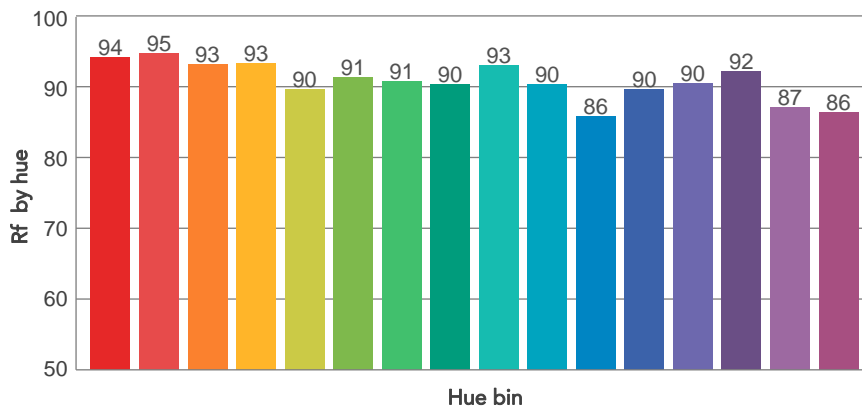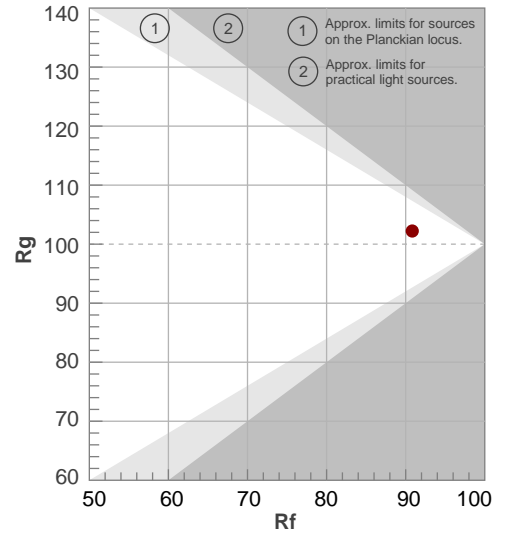

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,2°	158,6°	175,9°	77,8%	54,4%

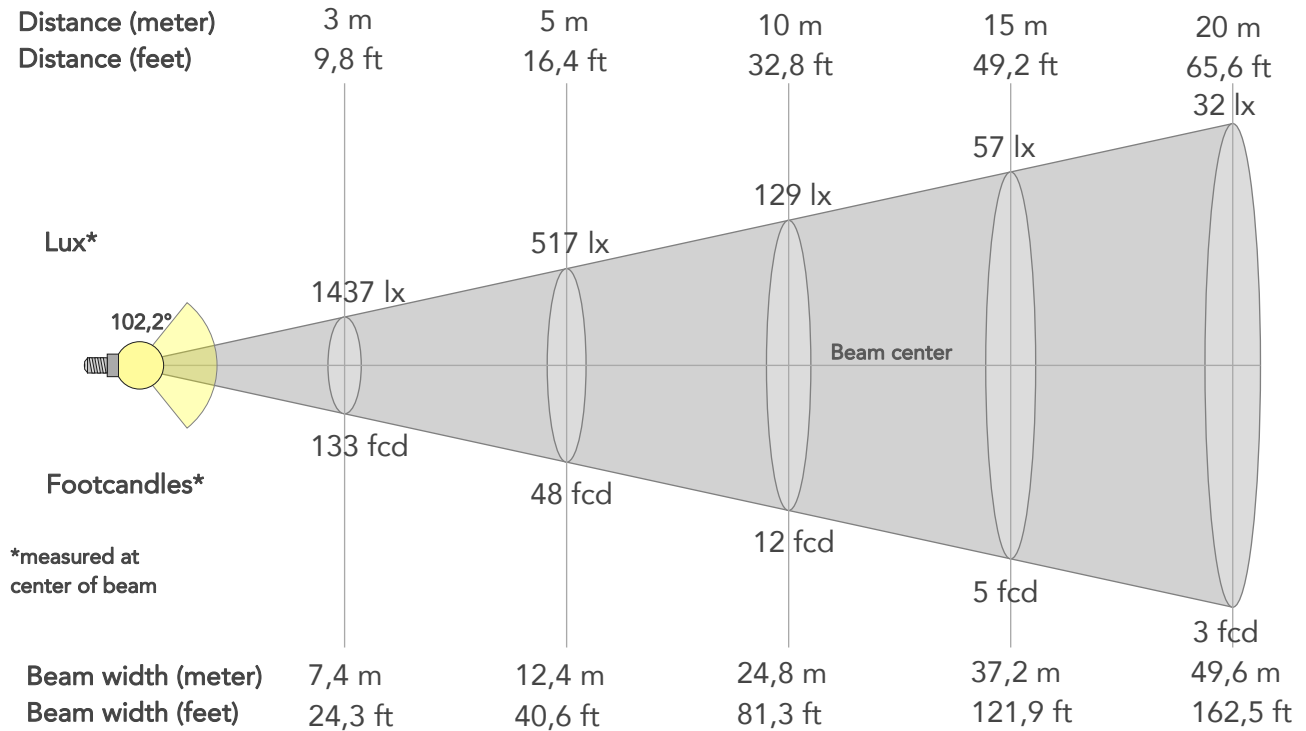

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	12930lx	3233lx	1437lx	808lx	517lx	230lx	129lx	57lx	32lx	21lx	14lx	8lx	5lx
Footcand.	1201fcd	300fcd	133fcd	75fcd	48fcd	21fcd	12fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,4m	9,9m	12,4m	18,6m	24,8m	37,2m	49,6m	61,9m	74,3m	99,1m	123,9m
Beam wid.	8,2ft	16,4ft	24,3ft	32,5ft	40,6ft	60,9ft	81,3ft	121,9ft	162,5ft	203,2ft	243,8ft	325,1ft	406,3ft


LINEAR DISTRIBUTION DIAGRAM

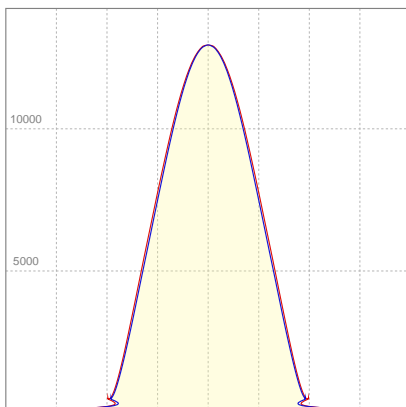

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
223V	2,05A	438,3W	78lm/W

ISO CANDELA DIAGRAM

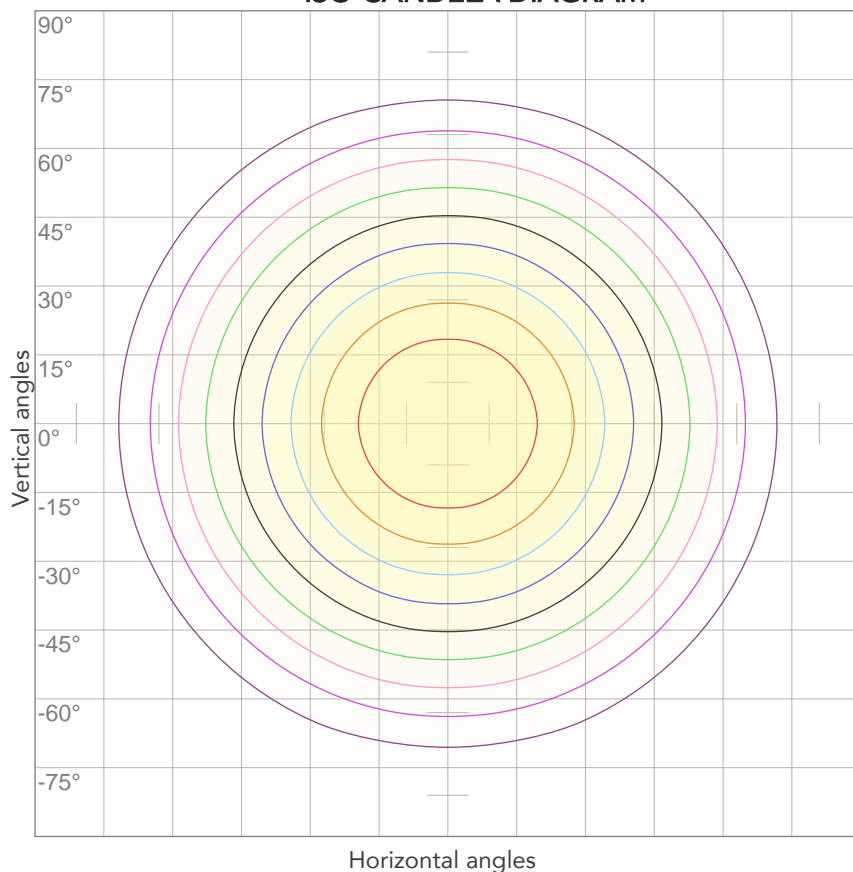


10%	1293 cd
20%	2586 cd
30%	3879 cd
40%	5172 cd
50%	6465 cd
60%	7758 cd
70%	9051 cd
80%	10344 cd

Conditions:

Number of c-planes: 4

Candela at center: 12930 cd

ISO LUX DIAGRAM

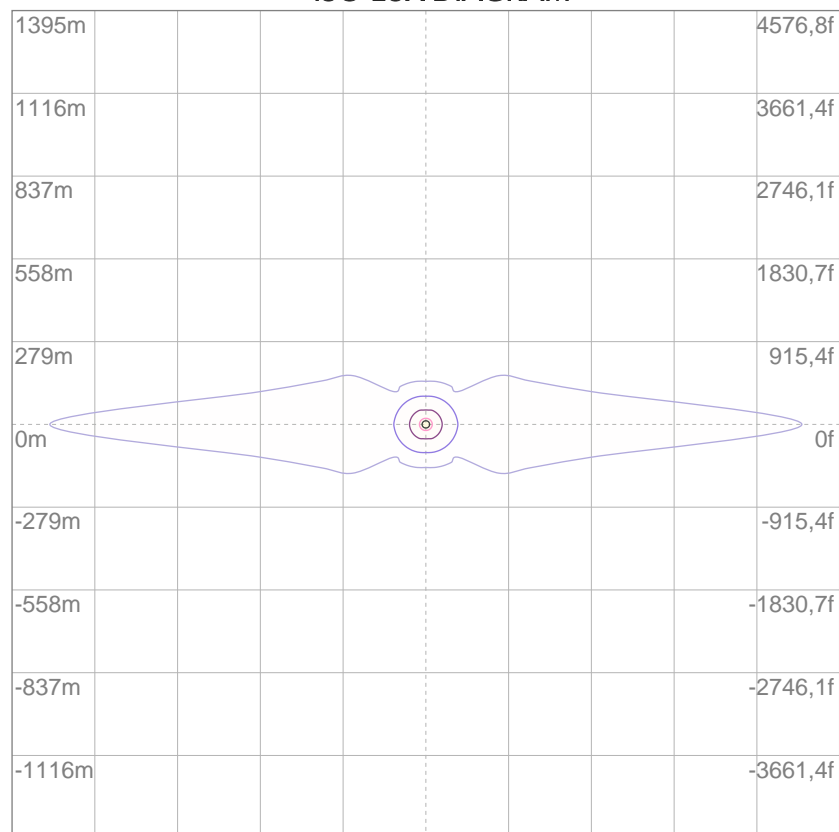

3%	3,88 lx
5%	6,47 lx
10%	12,9 lx
30%	38,8 lx
50%	64,7 lx

Conditions:

Number of c-planes: 4

Lux at center: 129 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

34055 lm

Peak candela output:

12989 cd

Light quality:

CRI: 95,8

Color temperature:

4167 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter LD

Target:


4000K

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:22:03

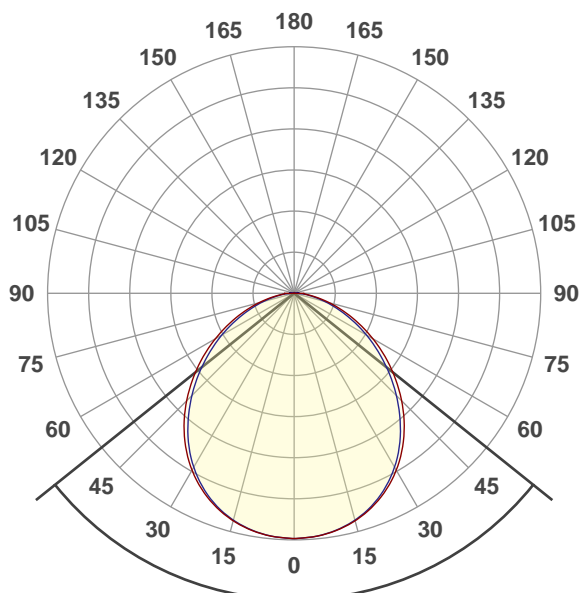




Beam angle 50%: 102,6°

Field angle 10%: 156,9°


Cut off angle 2.5%: 175,8°

Spectra

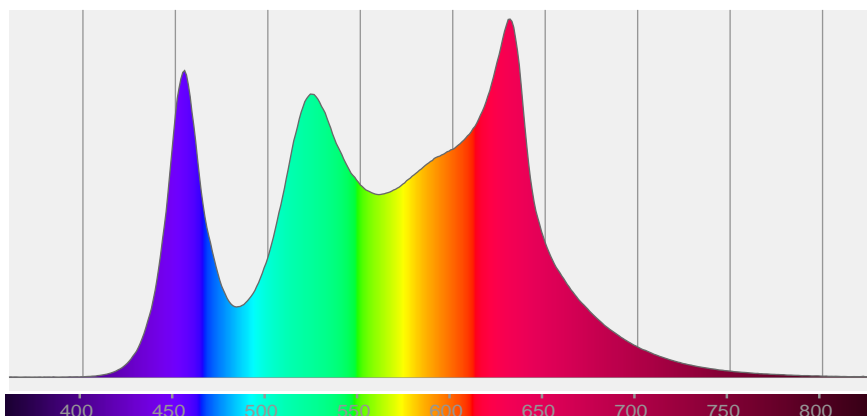


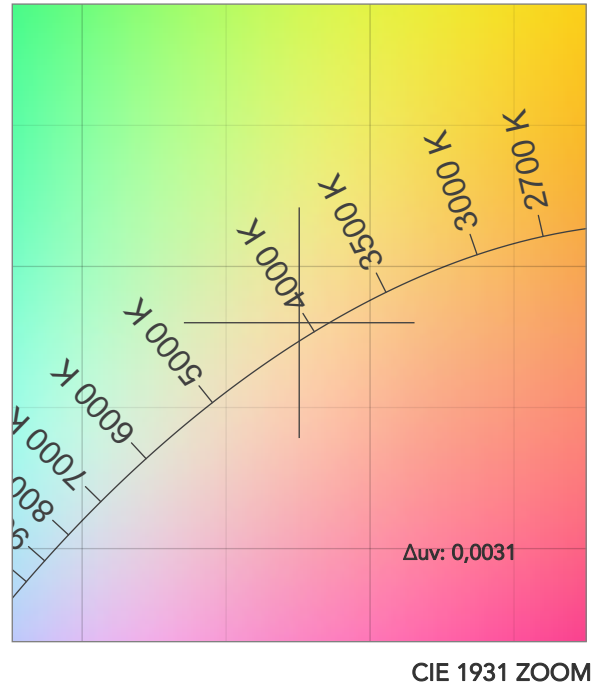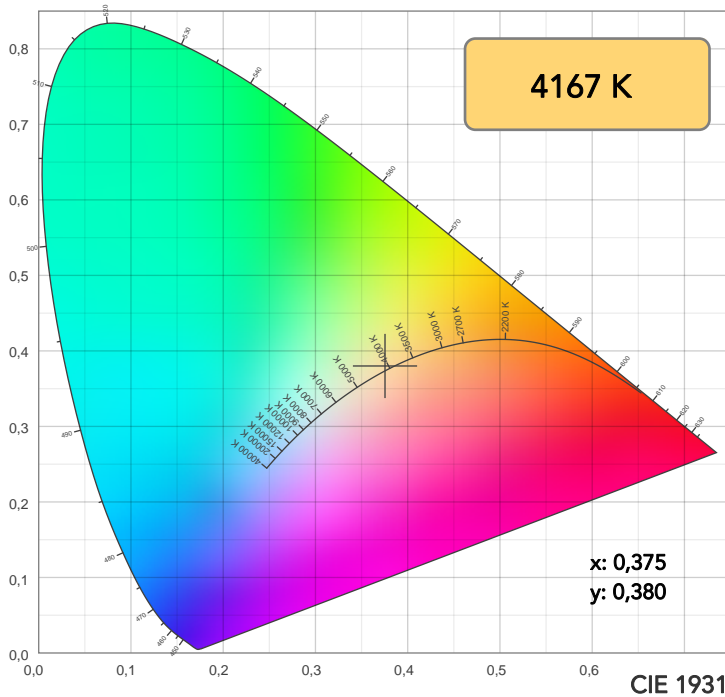

TM30: 90,8

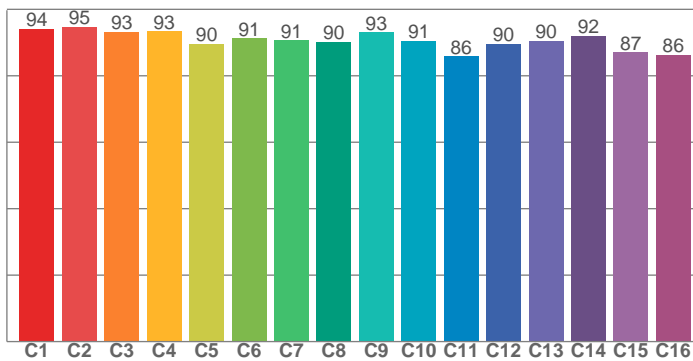

CRI: 95,8 (R1-R8)

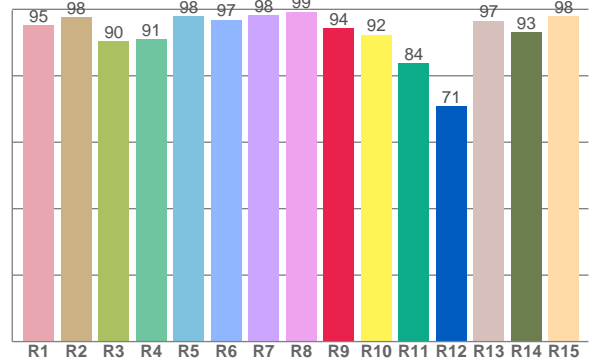

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,2	97,6	90,5	91,1	98,0	96,8	98,1	99,3	94,2	92,4	83,8	70,8	96,6	93,2	97,9


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
94,1	94,7	93,2	93,3	89,7	91,3	90,7	90,2	93,1	90,5	85,9	89,6	90,4	92,1	87,0	86,3

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93,7	98,1	89,6	95,1	98,1	94,1	95,2	98,0	95,4	97,2	94,3	93,2	93,7	97,6	96,7

CQS: 94,8

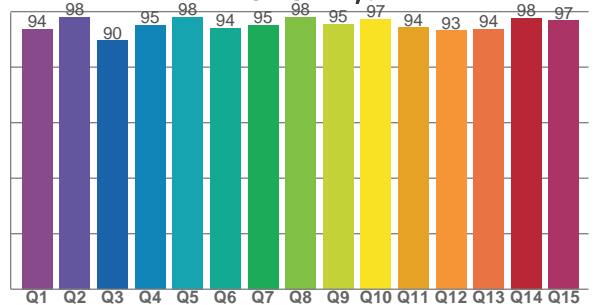

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
4167 K	95,8	94,2	90,8	102,3	94,8	89	0,375	0,380	0,0031

TM30 DETAILS

Rf 90,8
Fidelity index Rf


Rg 102,3
Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	94	0%	-1%
2	95	1%	-2%
3	93	0%	0%
4	93	-3%	-1%
5	90	-3%	2%
6	91	3%	4%
7	91	3%	2%
8	90	2%	2%
9	93	1%	4%
10	91	-1%	5%
11	86	4%	7%
12	90	4%	2%
13	90	4%	-4%
14	92	2%	3%
15	87	3%	-5%
16	86	3%	-6%

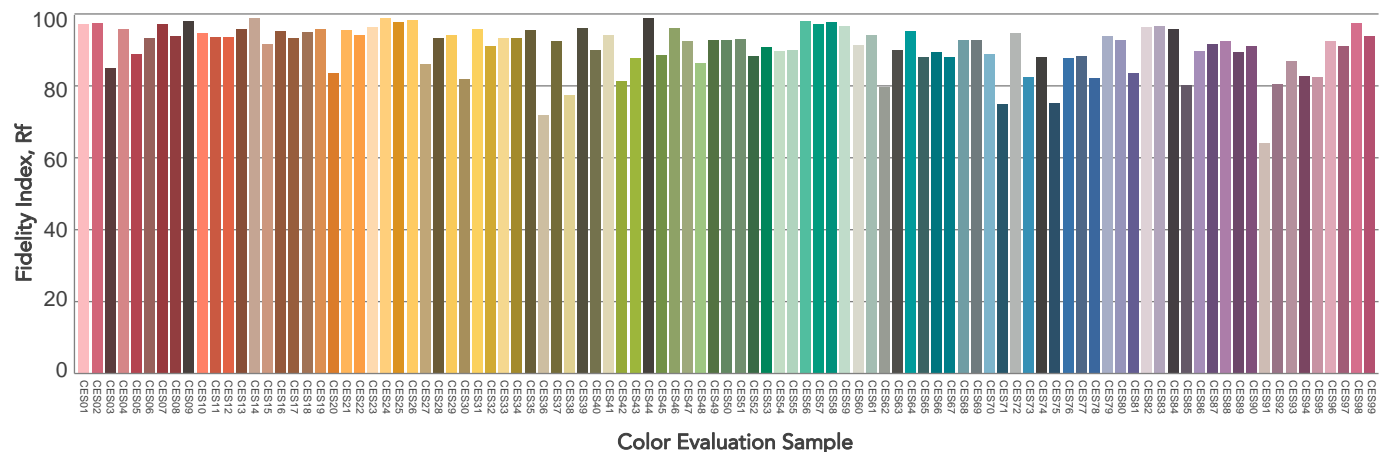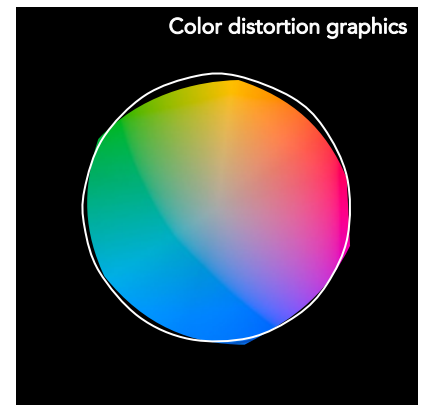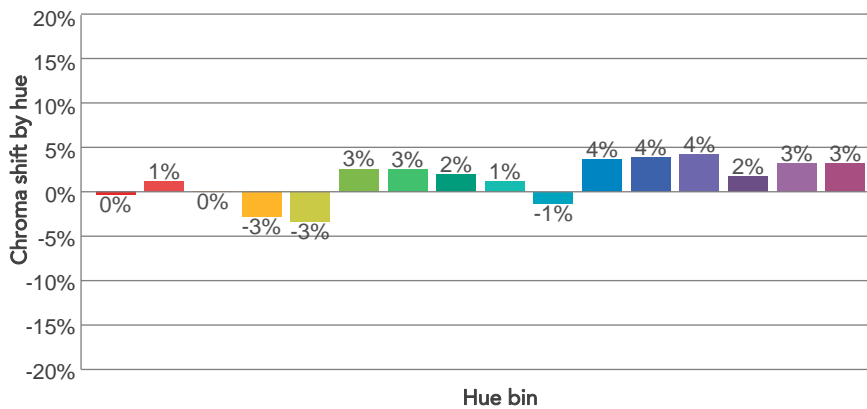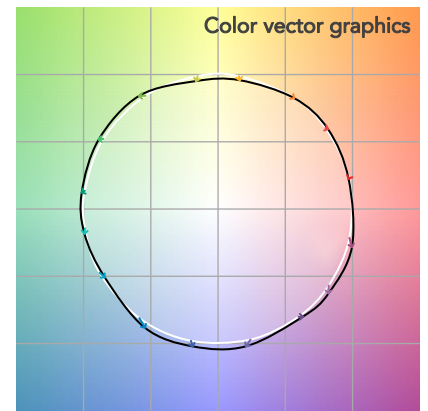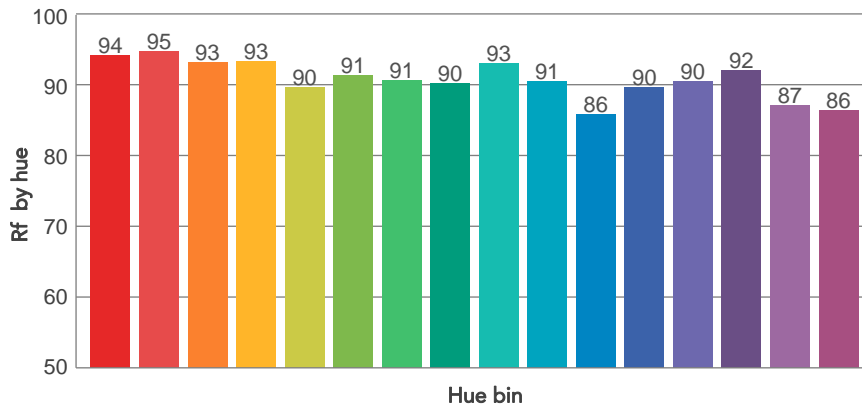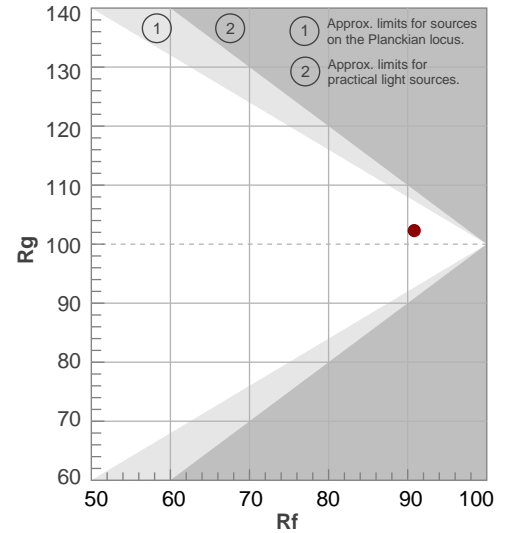

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,6°	156,9°	175,8°	80,3%	56,6%

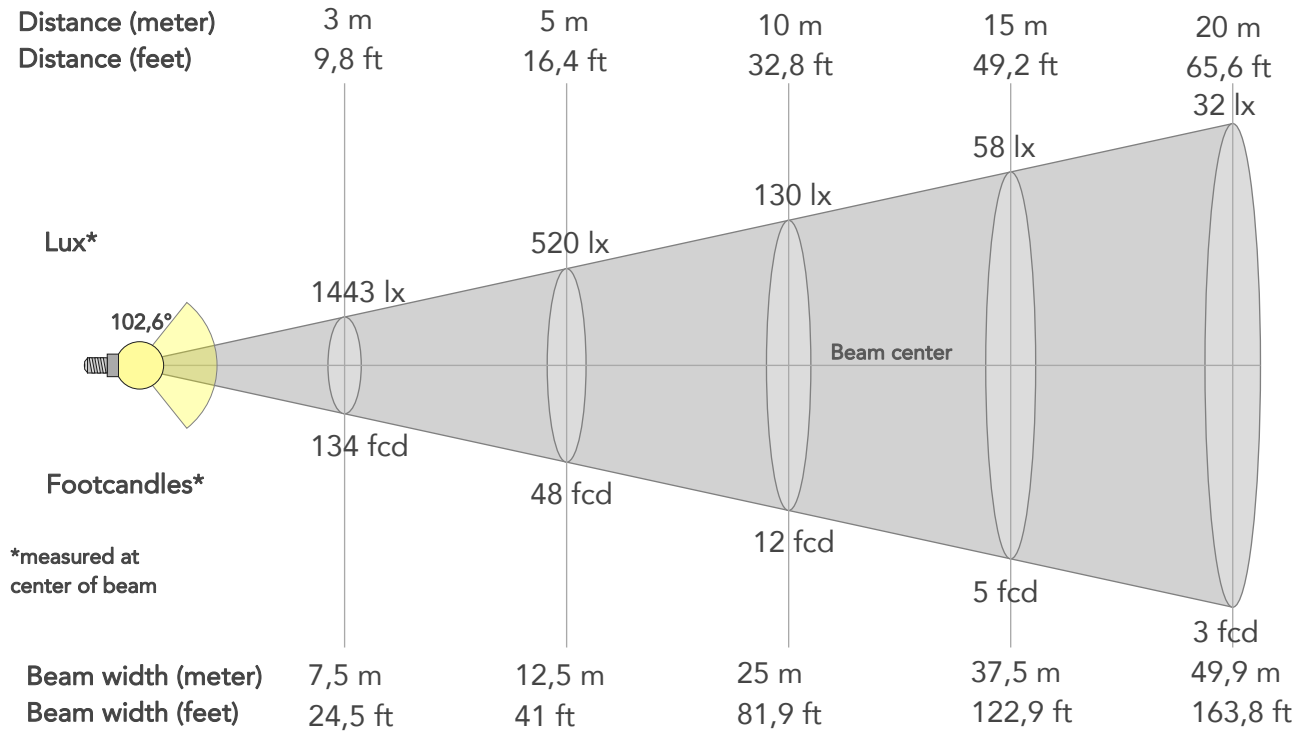

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	12988lx	3247lx	1443lx	812lx	520lx	231lx	130lx	58lx	32lx	21lx	14lx	8lx	5lx
Footcand.	1207fcd	302fcd	134fcd	75fcd	48fcd	21fcd	12fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,5m	10m	12,5m	18,7m	25m	37,5m	49,9m	62,4m	74,9m	99,9m	124,9m
Beam wid.	8,2ft	16,5ft	24,5ft	32,7ft	41ft	61,4ft	81,9ft	122,9ft	163,8ft	204,8ft	245,7ft	327,6ft	409,5ft


LINEAR DISTRIBUTION DIAGRAM

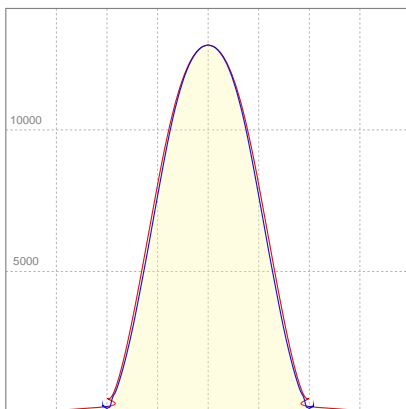

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
224V	2,06A	439,8W	77lm/W

ISO CANDELA DIAGRAM

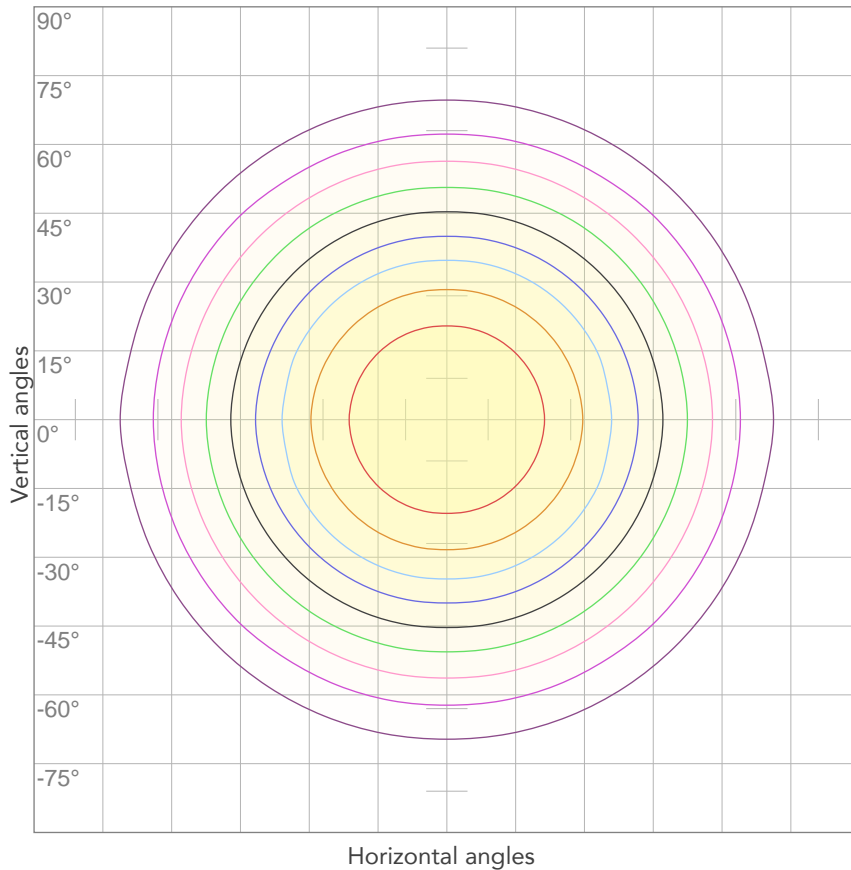


10%	1299 cd
20%	2598 cd
30%	3896 cd
40%	5195 cd
50%	6494 cd
60%	7793 cd
70%	9091 cd
80%	10390 cd

Conditions:

Number of c-planes: 4

Candela at center: 12988 cd

ISO LUX DIAGRAM

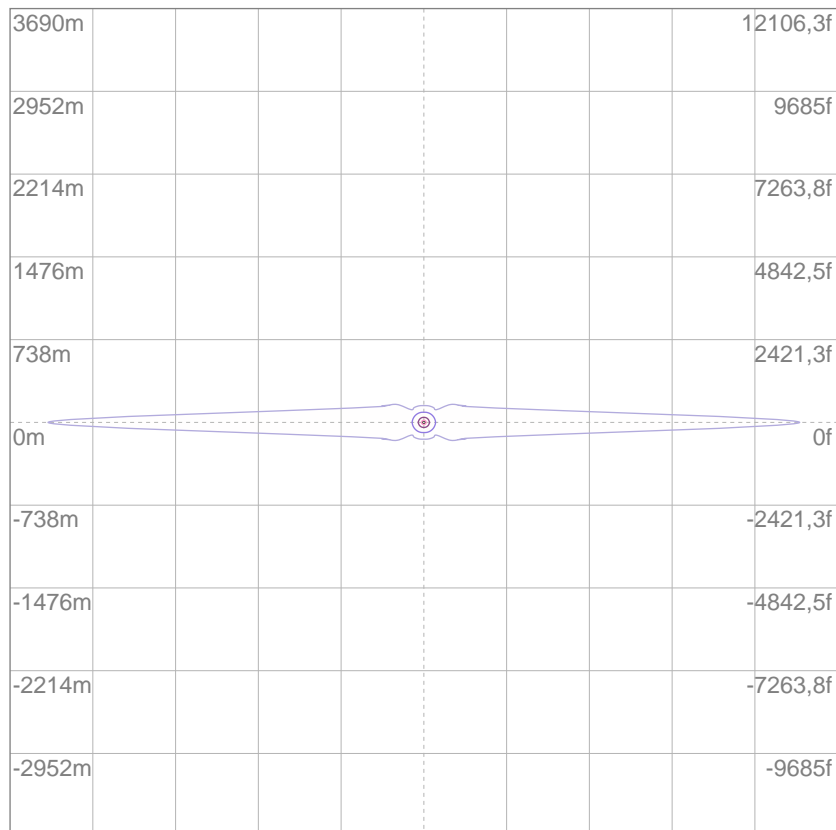

3%	3,90 lx
5%	6,49 lx
10%	13,0 lx
30%	39,0 lx
50%	64,9 lx

Conditions:

Number of c-planes: 4

Lux at center: 130 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

29831 lm

Peak candela output:

17948 cd

Light quality:

CRI: 92,0

Color temperature:

4107 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter Int.

Target:


4000K

Operator:

Paolo Carvone

Date and time:

14/08/2020 10:36:57

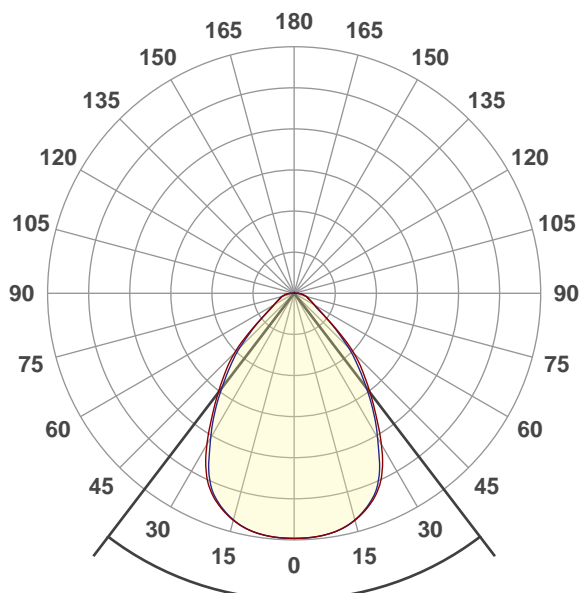




Beam angle 50%: 74,7°

Field angle 10%: 118,6°


Cut off angle 2.5%: 170,9°

Spectra

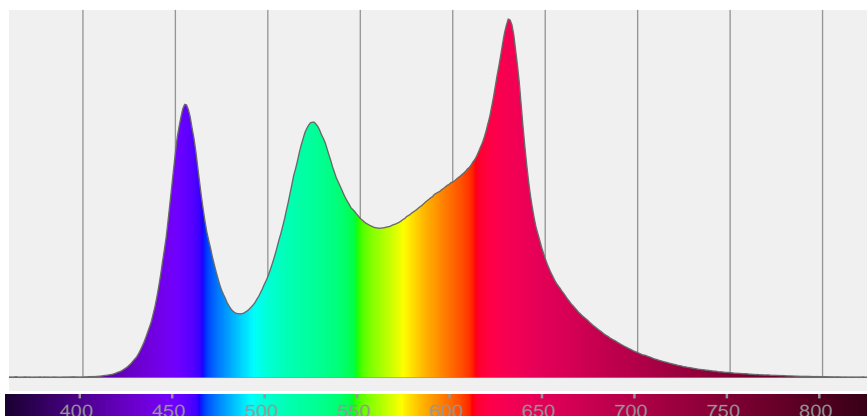


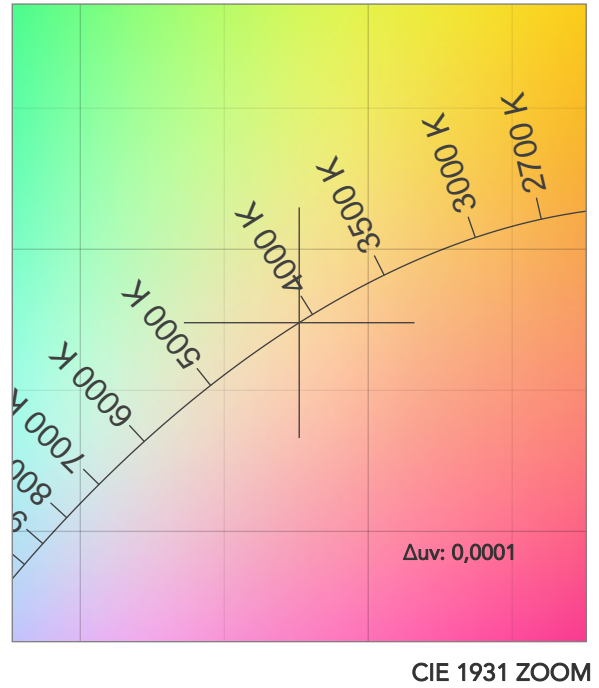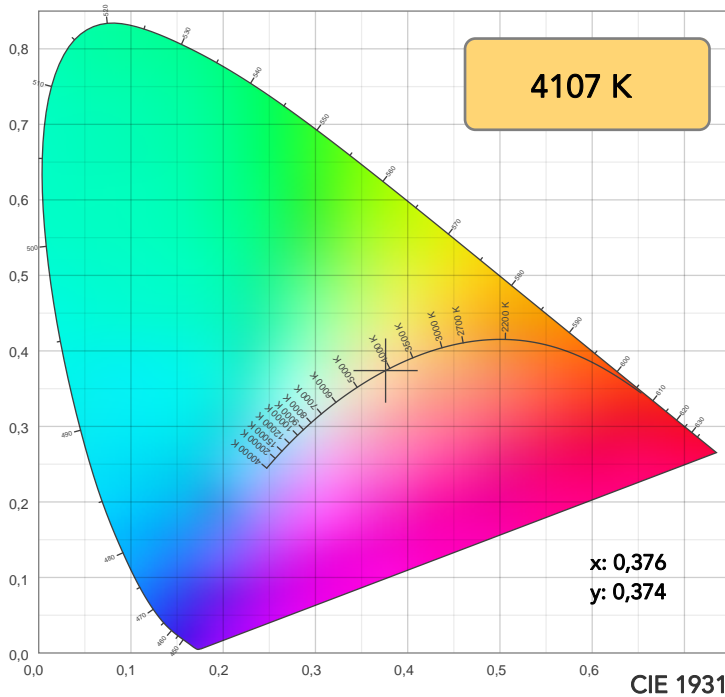

TM30: 89,8

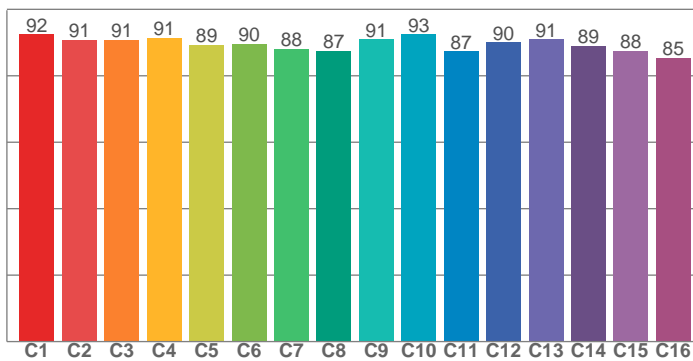

CRI: 92,0 (R1-R8)

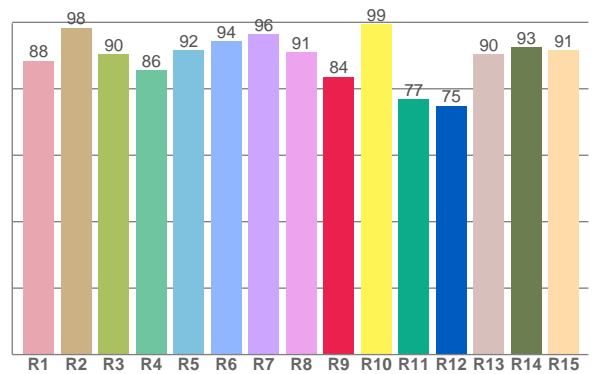

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
88,4	98,4	90,4	85,5	91,7	94,3	96,3	90,9	83,6	99,3	76,9	74,8	90,4	92,6	91,5


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,5	90,9	90,9	91,4	89,2	89,6	88,0	87,5	90,9	92,5	87,4	90,0	91,0	89,0	87,6	85,4

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94,3	98,1	91,1	97,5	96,1	93,5	96,4	95,9	94,3	98,8	92,7	90,4	91,4	95,6	95,1

CQS: 94,2

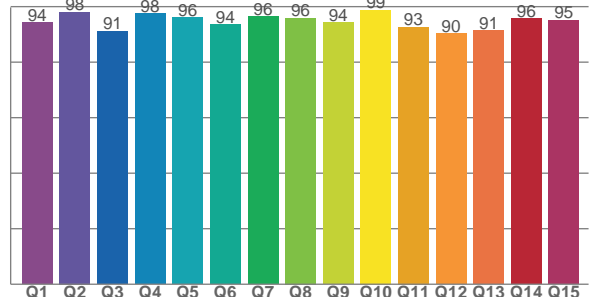

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
4107 K	92,0	83,6	89,8	104,1	94,2	88	0,376	0,374	0,0001

TM30 DETAILS

Rf 89,8
Fidelity index Rf


Rg 104,1
Gammut index

		Graphic shifts (%)	
Hue Bin	R _f	Chroma	Hue
1	92	2%	0%
2	91	3%	-3%
3	91	1%	-2%
4	91	-3%	-3%
5	89	-4%	1%
6	90	3%	5%
7	88	4%	4%
8	87	4%	3%
9	91	3%	4%
10	93	0%	4%
11	87	4%	6%
12	90	4%	1%
13	91	4%	-4%
14	89	1%	5%
15	88	4%	-2%
16	85	5%	-5%

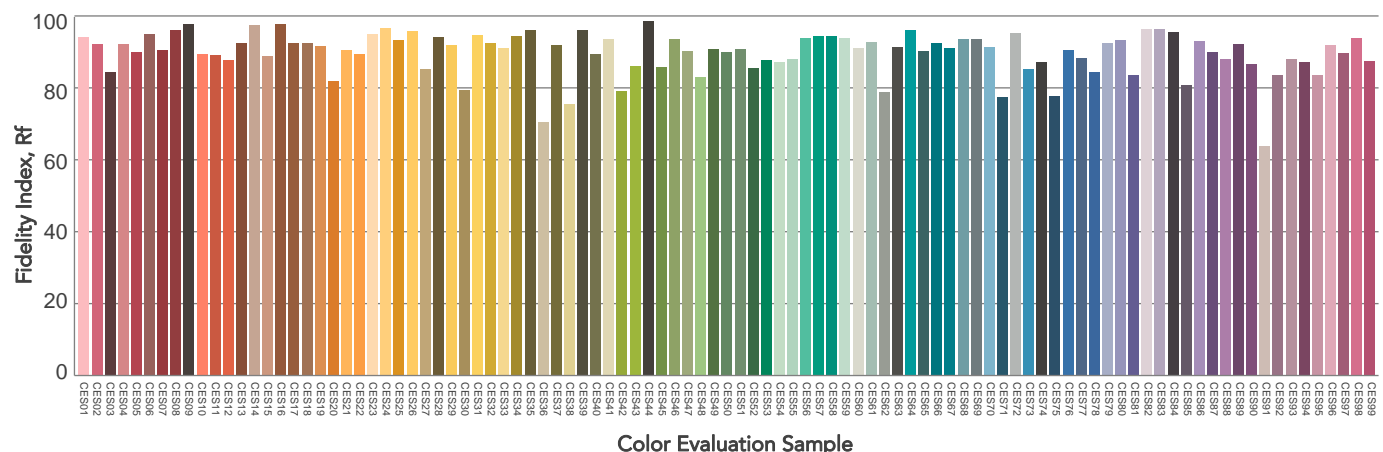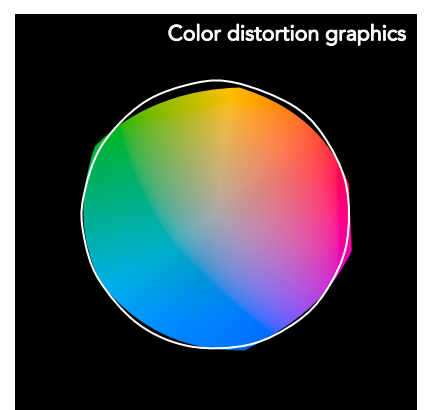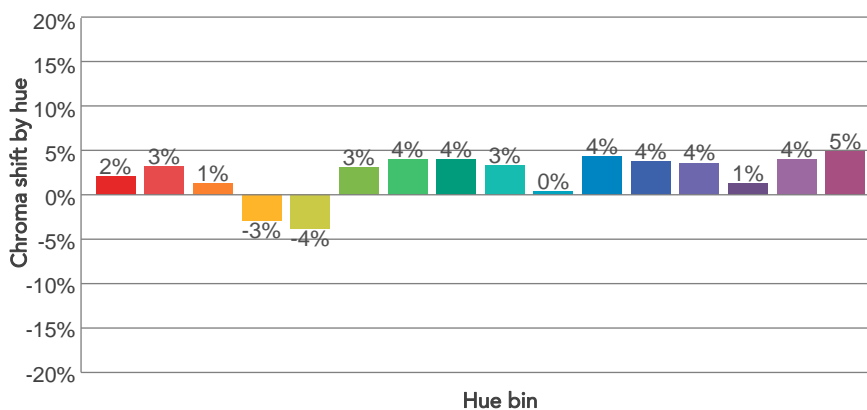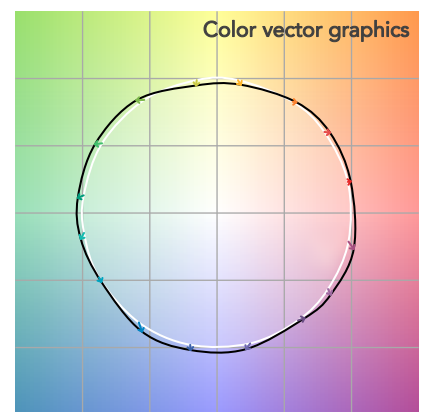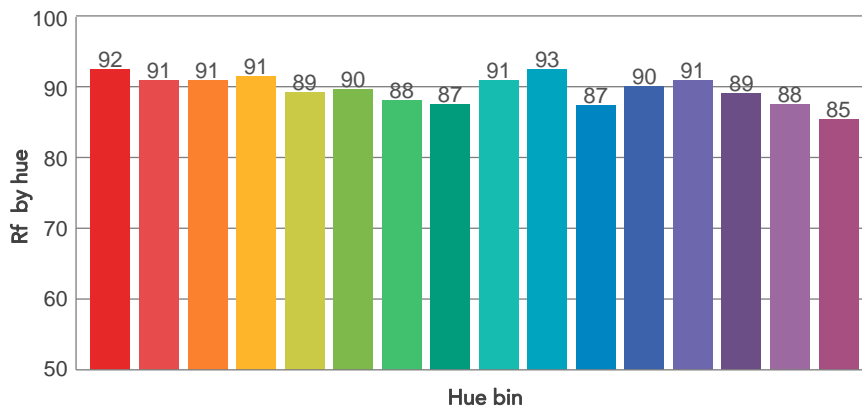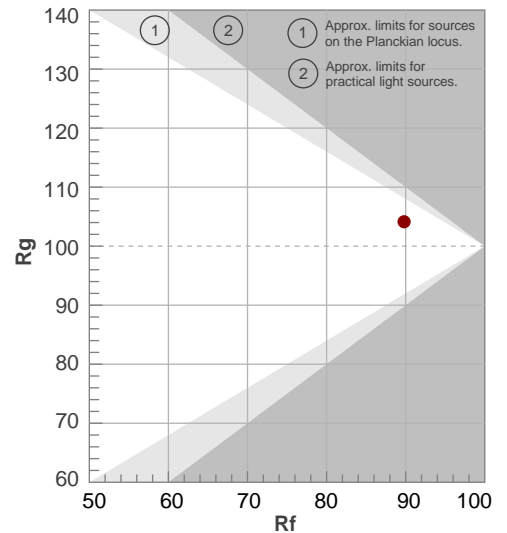

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
74,7°	118,6°	170,9°	88,1%	74,1%

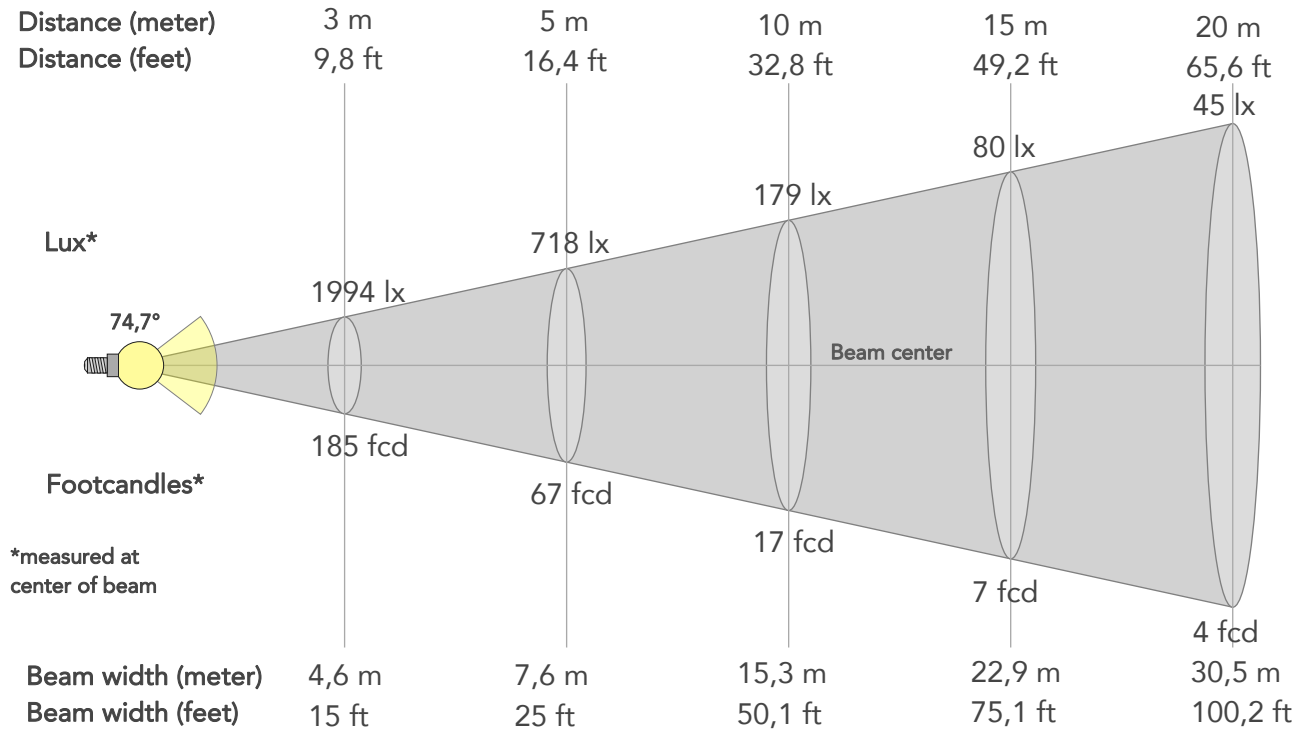

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	17947lx	4487lx	1994lx	1122lx	718lx	319lx	179lx	80lx	45lx	29lx	20lx	11lx	7lx
Footcand.	1667fcd	417fcd	185fcd	104fcd	67fcd	30fcd	17fcd	7fcd	4fcd	3fcd	2fcd	1fcd	1fcd
Beam wid.	1,5m	3,1m	4,6m	6,1m	7,6m	11,5m	15,3m	22,9m	30,5m	38,2m	45,8m	61,1m	76,4m
Beam wid.	5ft	10,1ft	15ft	20ft	25ft	37,6ft	50,1ft	75,1ft	100,2ft	125,2ft	150,3ft	200,4ft	250,5ft


LINEAR DISTRIBUTION DIAGRAM

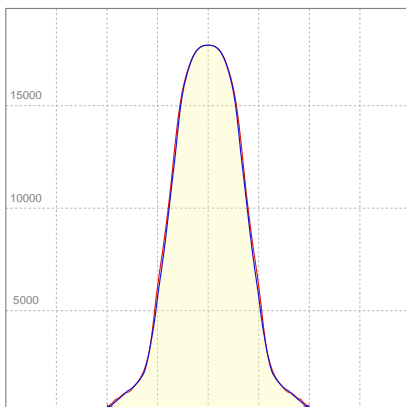

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	2,04A	445,9W	67lm/W

ISO CANDELA DIAGRAM

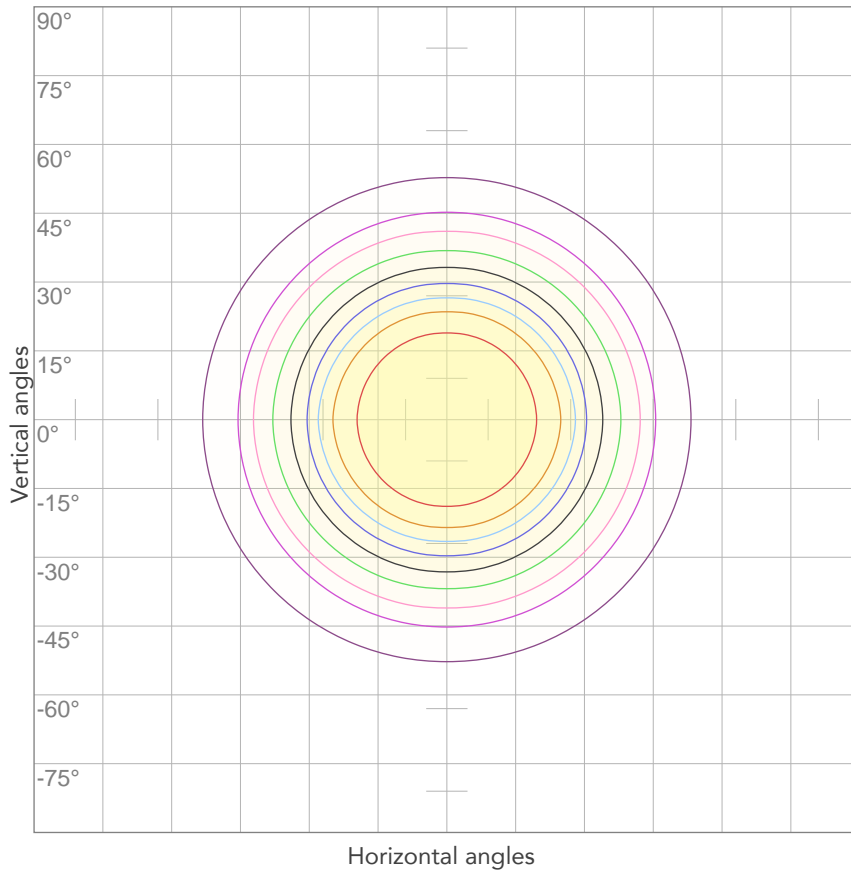


10%	1795 cd
20%	3589 cd
30%	5384 cd
40%	7179 cd
50%	8973 cd
60%	10768 cd
70%	12563 cd
80%	14357 cd

Conditions:

Number of c-planes: 4

Candela at center: 17947 cd

ISO LUX DIAGRAM

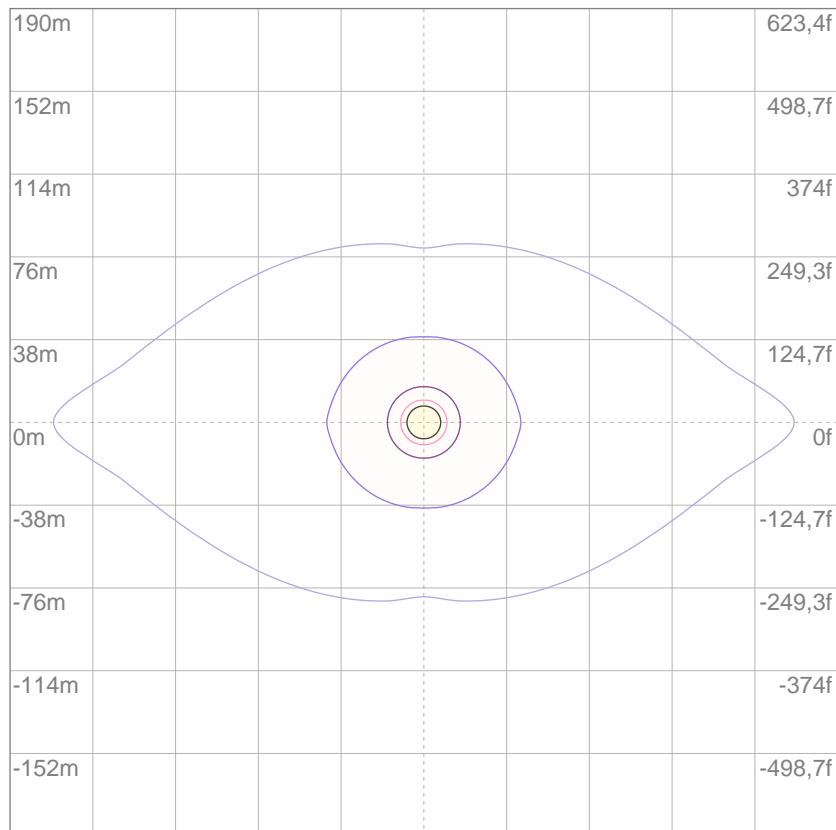

3%	5,38 lx
5%	8,97 lx
10%	17,9 lx
30%	53,8 lx
50%	89,7 lx

Conditions:

Number of c-planes: 4

Lux at center: 179 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

27821 lm

Peak candela output:

9617 cd

Light quality:

CRI: 94,4

Color temperature:

6185 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter HD

Target:


5600K

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:05:36

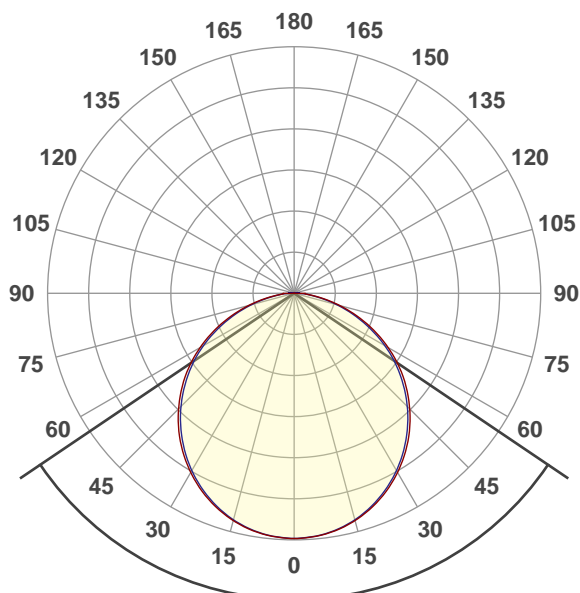




Beam angle 50%: 111,9°

Field angle 10%: 161,8°


Cut off angle 2.5%: 177,4°

Spectra

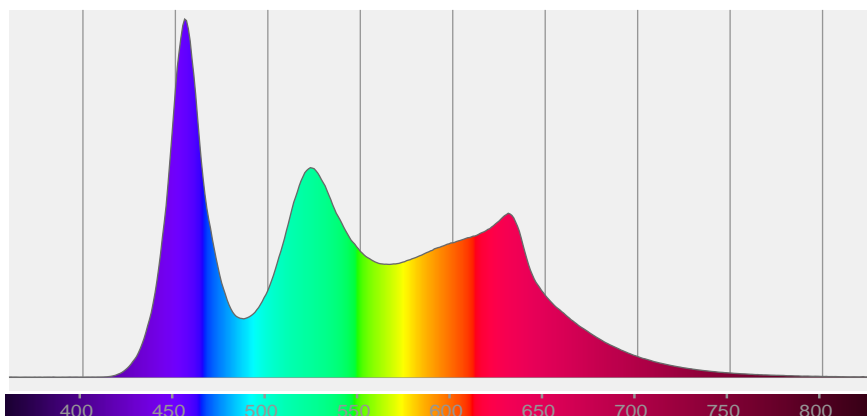


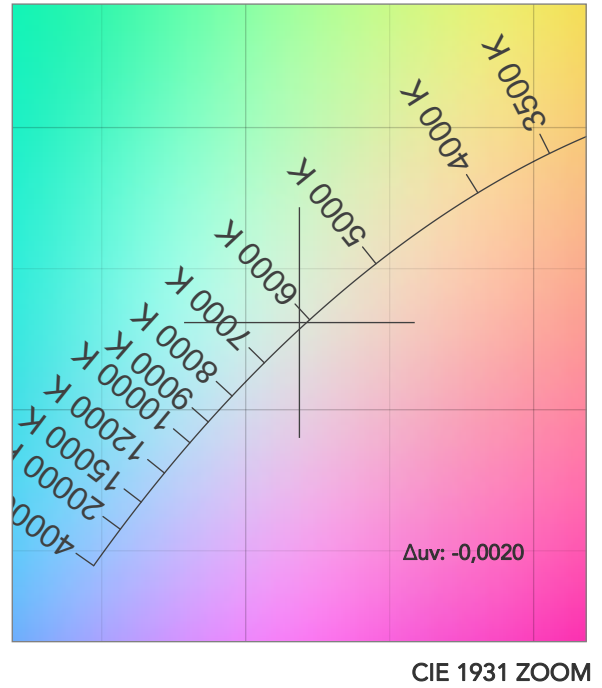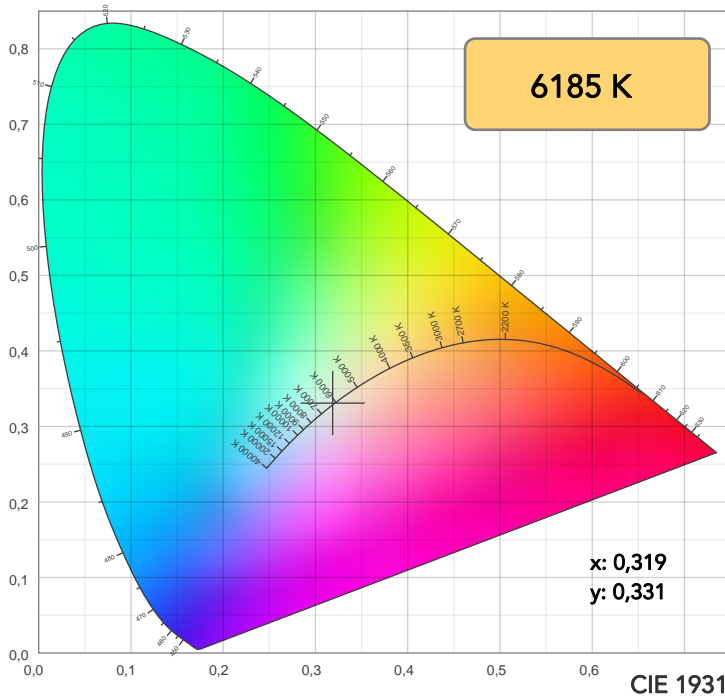

TM30: 89,3

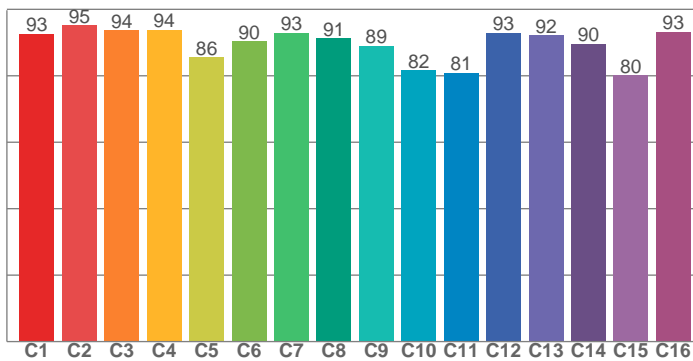

CRI: 94,4 (R1-R8)

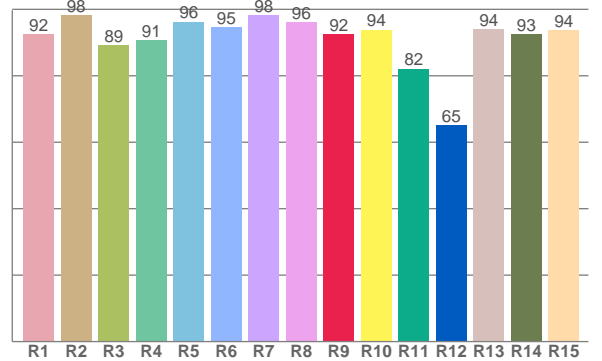

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92,5	98,1	89,1	90,6	96,3	94,5	98,2	96,0	92,5	93,8	82,1	65,2	94,0	92,6	93,6


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,6	95,1	93,7	93,9	85,5	90,3	92,9	91,3	89,0	81,6	80,9	92,8	92,1	89,7	80,1	93,2

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
94,2	98,9	84,4	88,5	97,1	96,4	96,1	97,4	92,4	94,3	98,5	96,0	95,7	96,4	96,3

CQS: 93,6

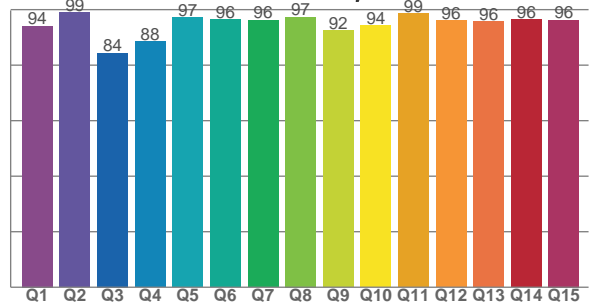

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
6185 K	94,4	92,5	89,3	103,3	93,6	93	0,319	0,331	-0,0020

TM30 DETAILS

Rf 89,3
Fidelity index Rf


Rg 103,3
Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	93	1%	0%
2	95	2%	0%
3	94	1%	-1%
4	94	-2%	1%
5	86	-5%	1%
6	90	2%	4%
7	93	4%	1%
8	91	0%	4%
9	89	-1%	8%
10	82	-1%	10%
11	81	4%	10%
12	93	3%	3%
13	92	5%	0%
14	90	3%	3%
15	80	12%	-8%
16	93	2%	1%

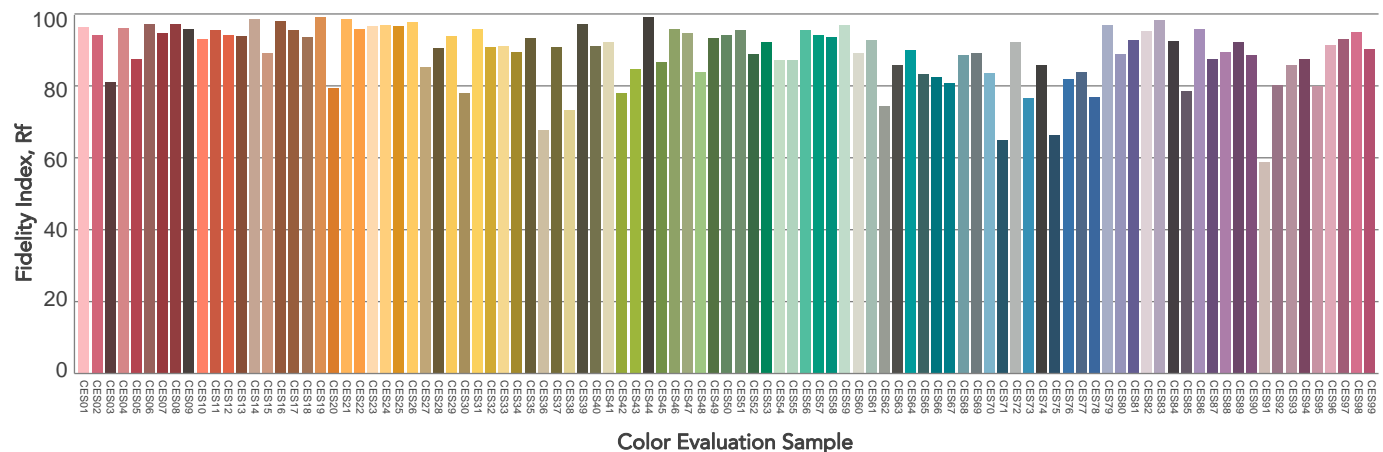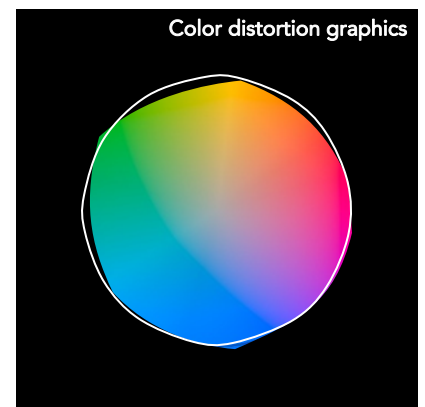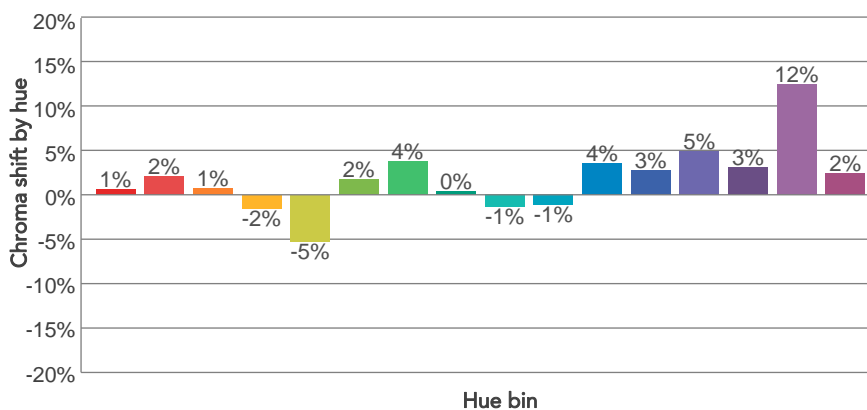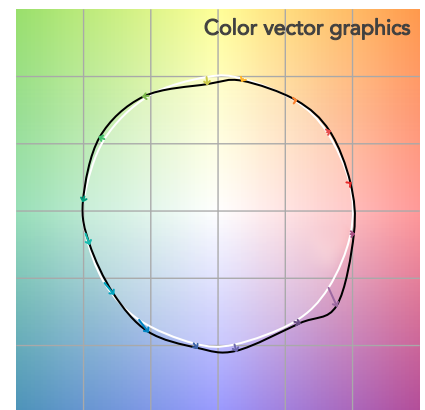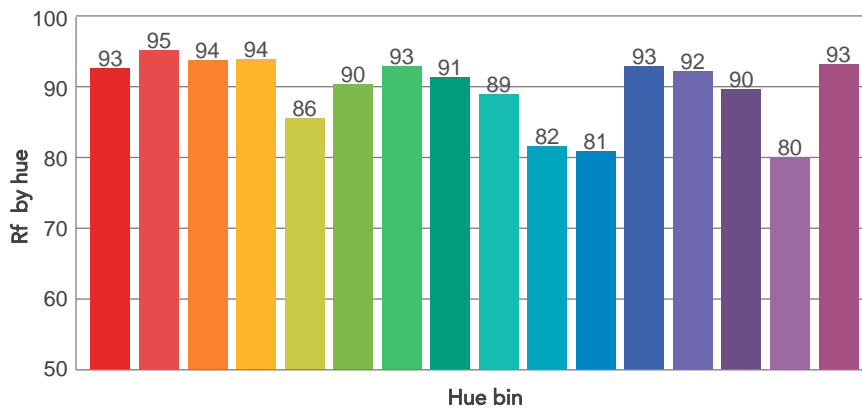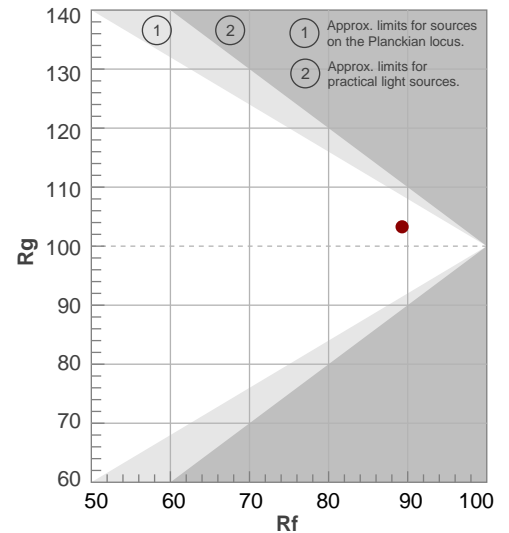

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
111,9°	161,8°	177,4°	77,2%	52,6%

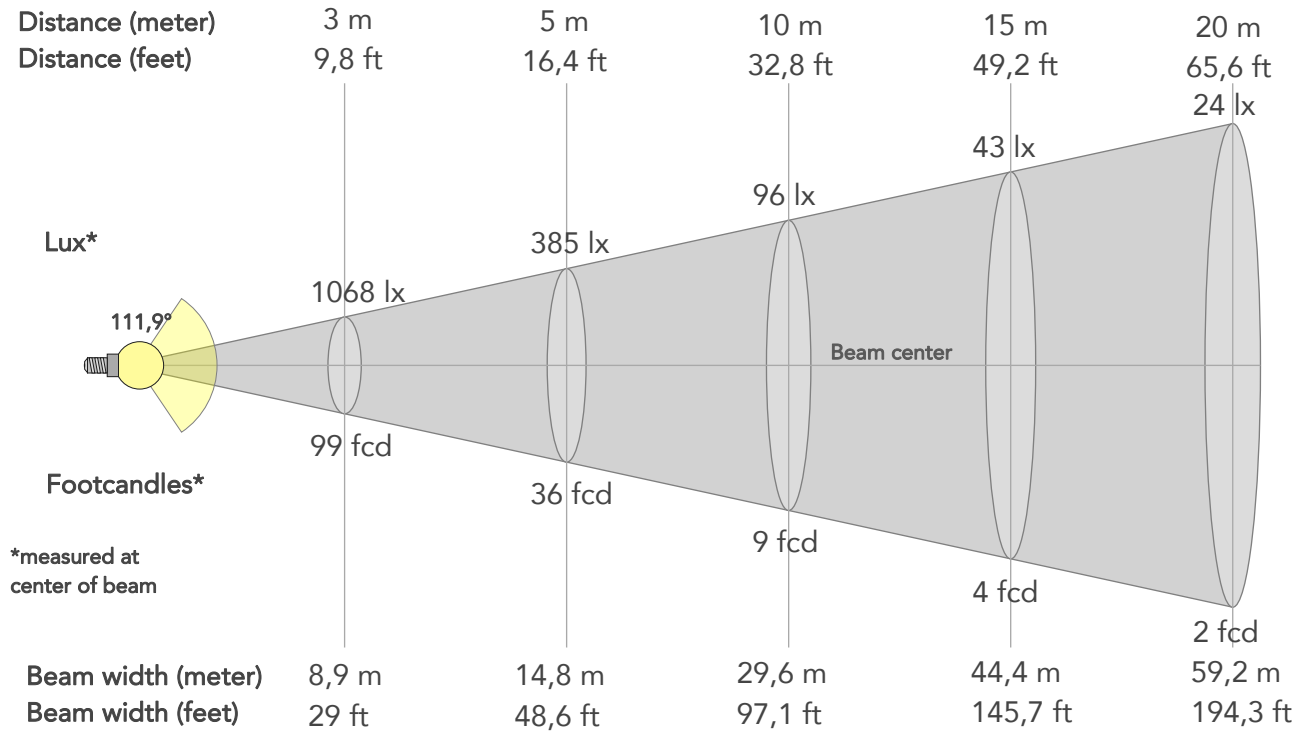

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	9613lx	2403lx	1068lx	601lx	385lx	171lx	96lx	43lx	24lx	15lx	11lx	6lx	4lx
Footcand.	893fcd	223fcd	99fcd	56fcd	36fcd	16fcd	9fcd	4fcd	2fcd	1fcd	1fcd	1fcd	0fcd
Beam wid.	3m	5,9m	8,9m	11,8m	14,8m	22,2m	29,6m	44,4m	59,2m	74m	88,8m	118,5m	148,1m
Beam wid.	9,8ft	19,5ft	29ft	38,8ft	48,6ft	72,9ft	97,1ft	145,7ft	194,3ft	242,8ft	291,4ft	388,5ft	485,7ft


LINEAR DISTRIBUTION DIAGRAM

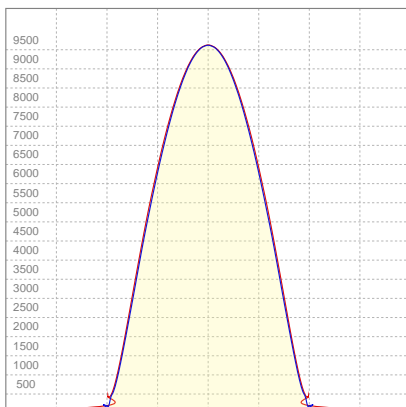

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
224V	2,04A	439,2W	63lm/W

ISO CANDELA DIAGRAM

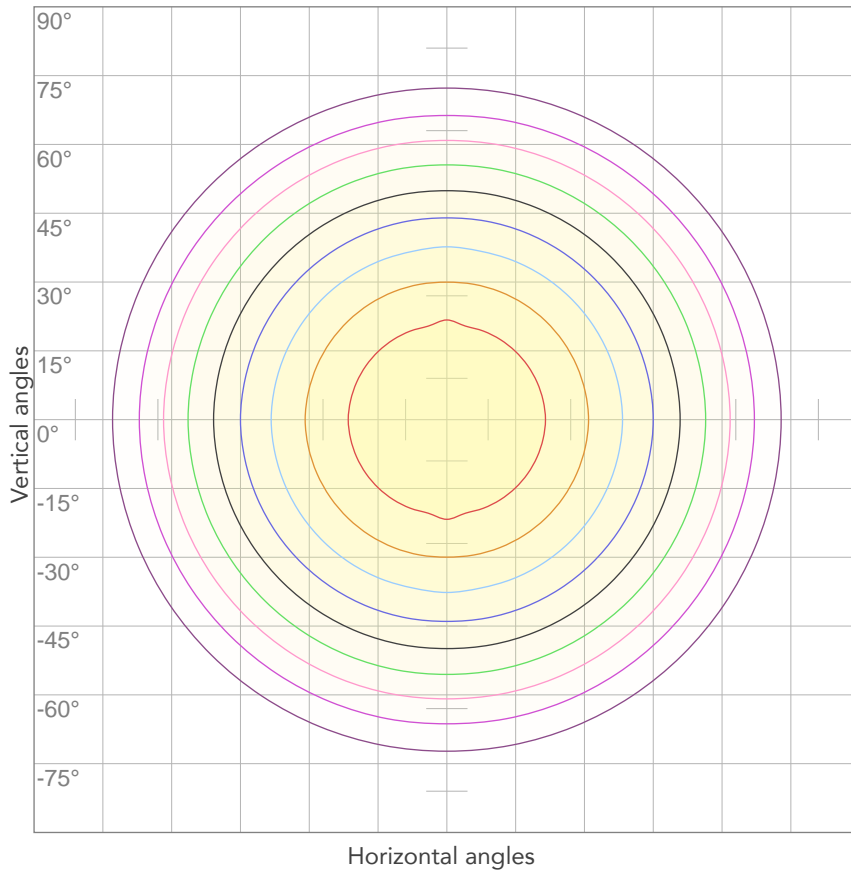


10%	961 cd
20%	1923 cd
30%	2884 cd
40%	3845 cd
50%	4807 cd
60%	5768 cd
70%	6729 cd
80%	7691 cd

Conditions:

Number of c-planes: 4

Candela at center: 9613 cd

ISO LUX DIAGRAM

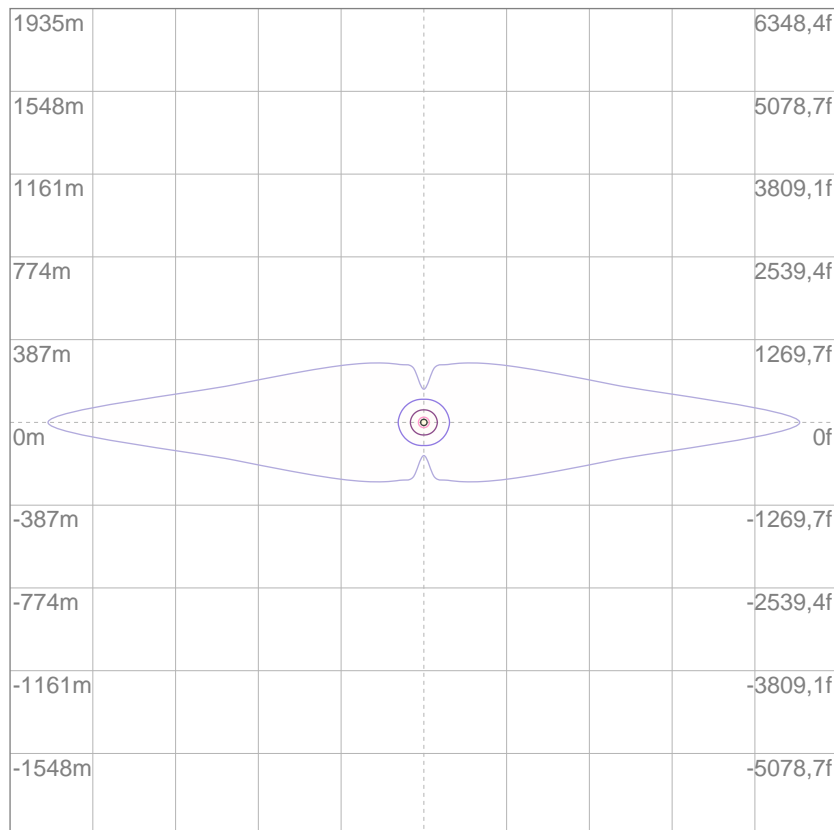

3%	2,88 lx
5%	4,81 lx
10%	9,61 lx
30%	28,8 lx
50%	48,1 lx

Conditions:

Number of c-planes: 4

Lux at center: 96,1 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

33069 lm

Peak candela output:

12475 cd

Light quality:

CRI: 95,5

Color temperature:

5904 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter MD

Target:


5600K

Operator:

Paolo Carvone

Date and time:

14/05/2020 17:42:31

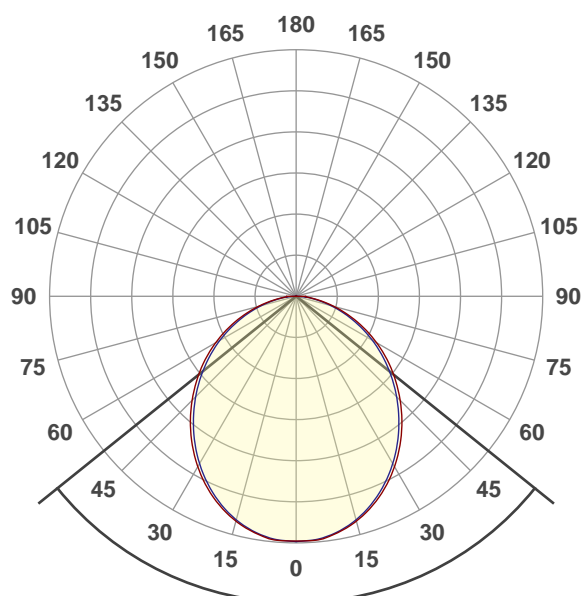




Beam angle 50%: 102,4°

Field angle 10%: 158,6°


Cut off angle 2.5%: 175,9°

Spectra

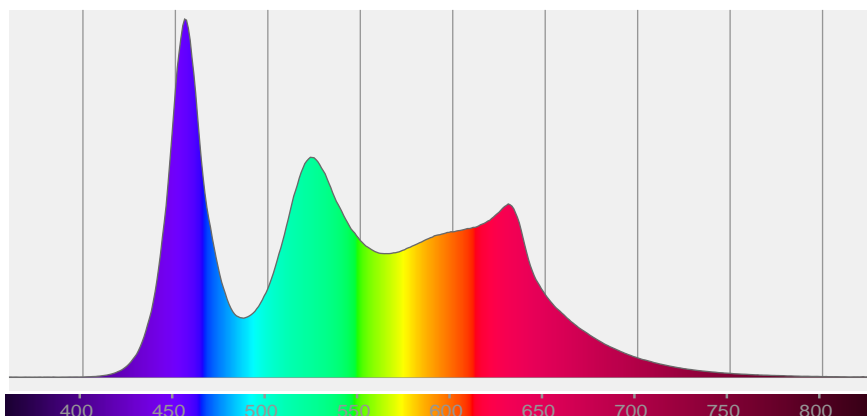


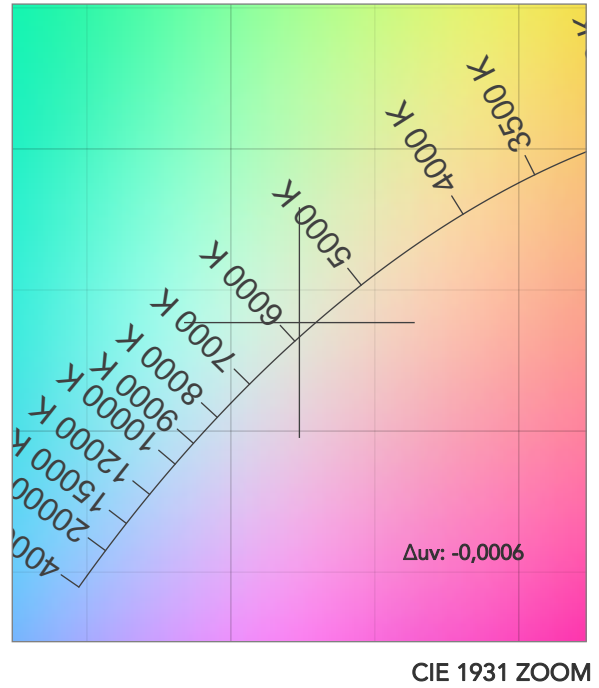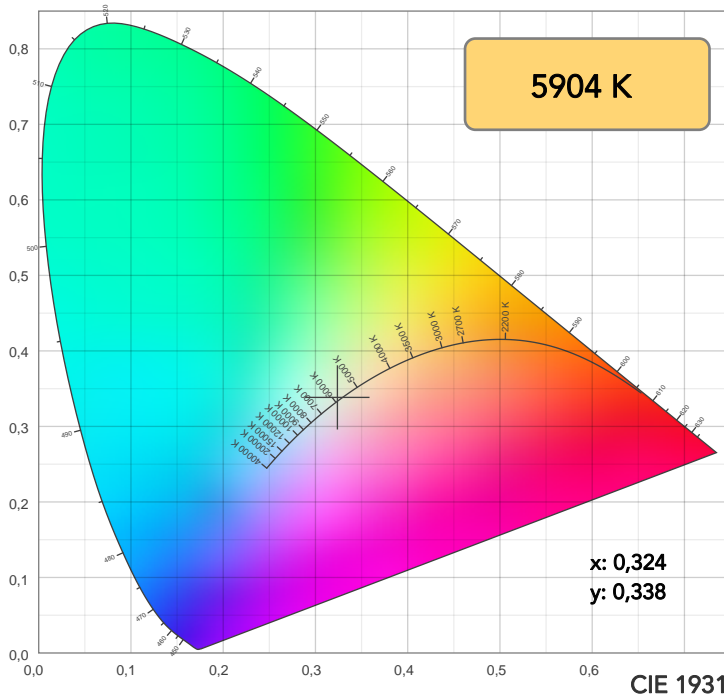

TM30: 89,5

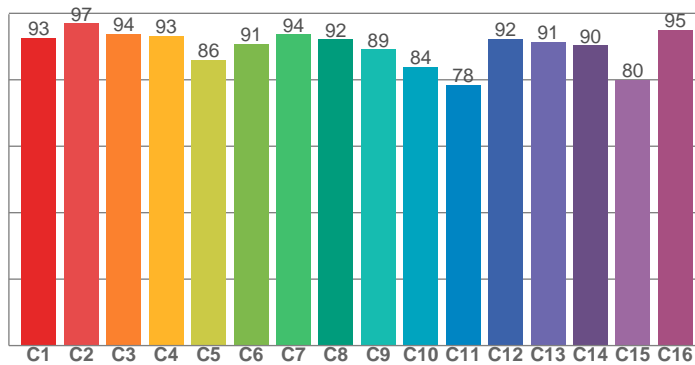

CRI: 95,5 (R1-R8)

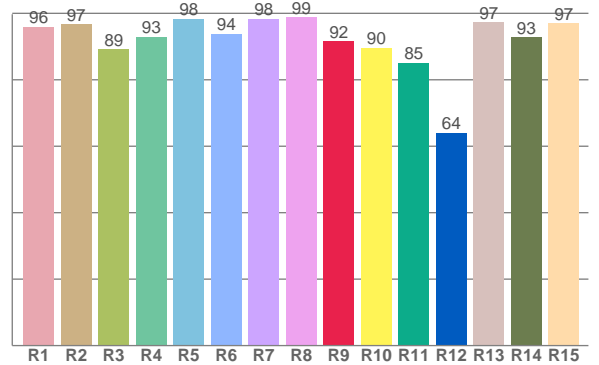

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96,0	96,7	89,1	92,9	98,4	93,9	98,4	98,9	91,6	89,6	85,1	64,1	97,3	92,8	97,0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,7	97,0	93,8	93,2	85,9	90,8	93,6	92,2	89,2	83,8	78,5	92,4	91,4	90,4	79,9	95,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93,6	98,9	83,5	87,1	95,4	96,1	94,6	98,7	93,0	93,2	98,5	97,9	97,2	96,6	96,0

CQS: 93,2

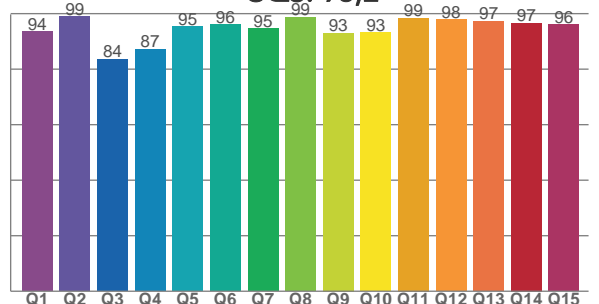

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
5904 K	95,5	91,6	89,5	102,4	93,2	92	0,324	0,338	-0,0006

TM30 DETAILS

Rf 89,5
Fidelity index Rf


Rg 102,4
Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	93	-1%	0%
2	97	1%	0%
3	94	0%	1%
4	93	-1%	2%
5	86	-5%	1%
6	91	2%	3%
7	94	3%	0%
8	92	-1%	3%
9	89	-2%	8%
10	84	-1%	9%
11	78	3%	12%
12	92	3%	3%
13	91	5%	-1%
14	90	3%	1%
15	80	11%	-10%
16	95	1%	0%

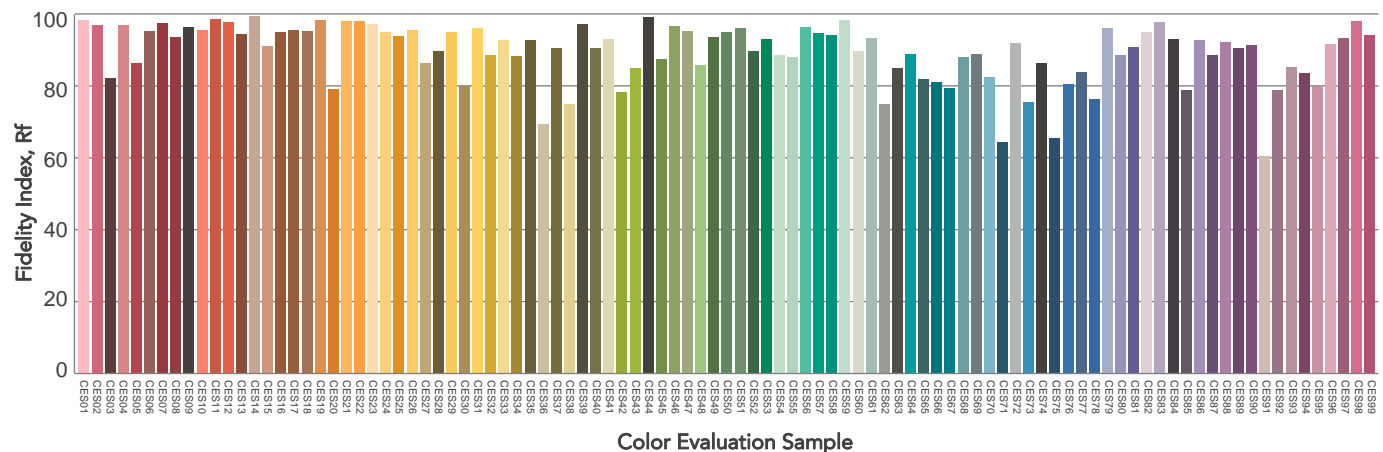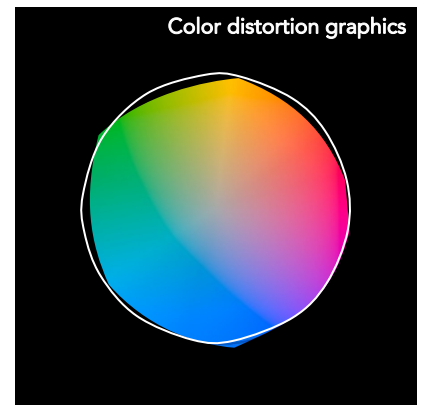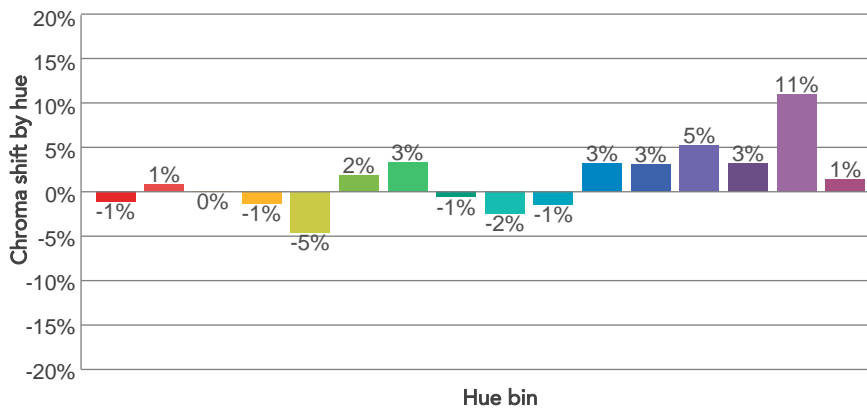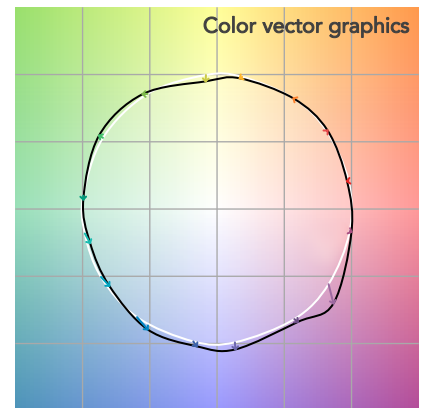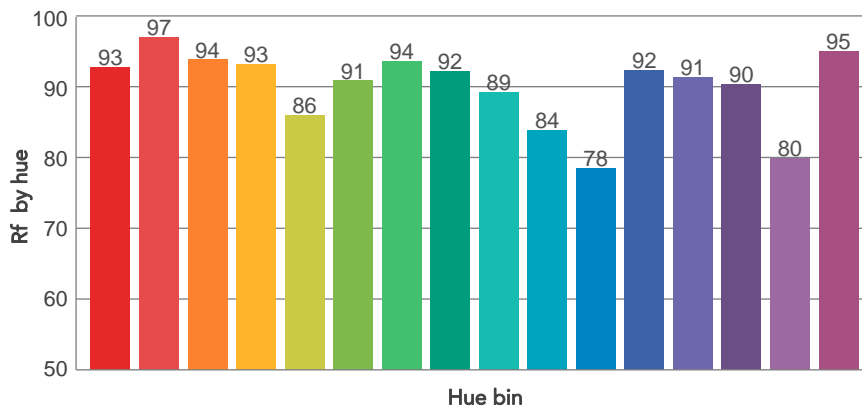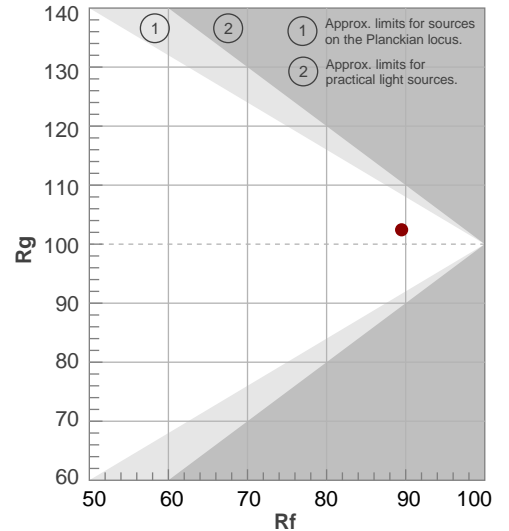

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,4°	158,6°	175,9°	77,8%	54,4%

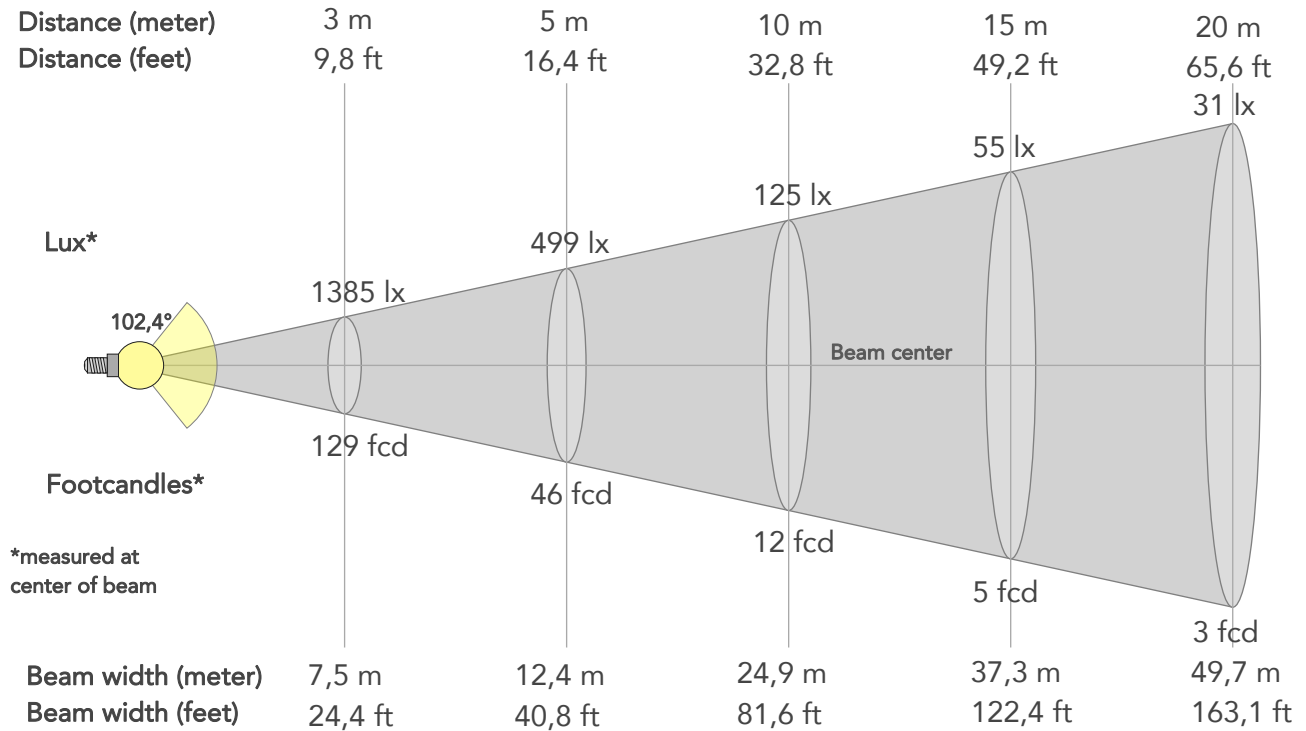

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	12467lx	3117lx	1385lx	779lx	499lx	222lx	125lx	55lx	31lx	20lx	14lx	8lx	5lx
Footcand.	1158fcd	290fcd	129fcd	72fcd	46fcd	21fcd	12fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,5m	9,9m	12,4m	18,7m	24,9m	37,3m	49,7m	62,2m	74,6m	99,5m	124,3m
Beam wid.	8,2ft	16,4ft	24,4ft	32,6ft	40,8ft	61,2ft	81,6ft	122,4ft	163,1ft	203,9ft	244,7ft	326,3ft	407,9ft


LINEAR DISTRIBUTION DIAGRAM

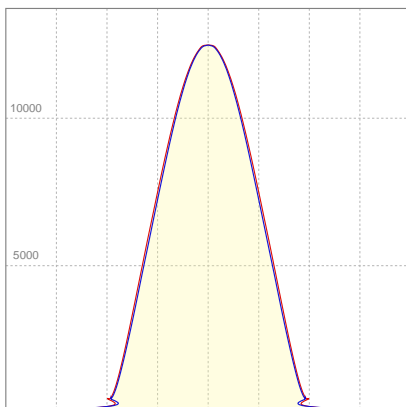

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
223V	2,05A	438,2W	75lm/W

ISO CANDELA DIAGRAM

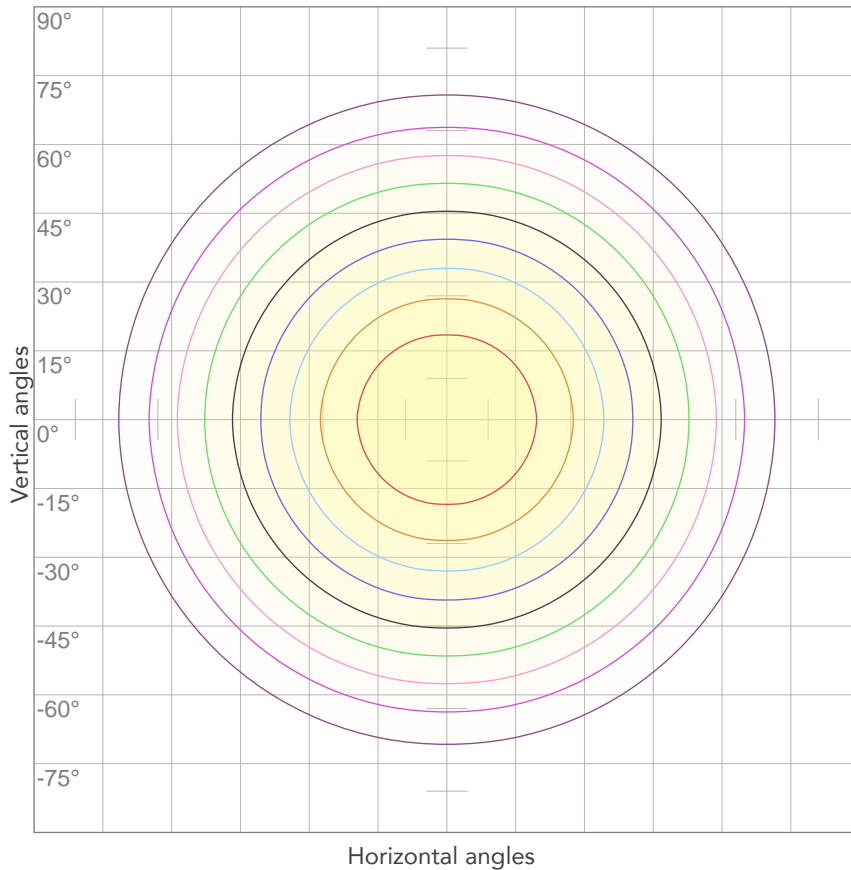


10%	1247 cd
20%	2493 cd
30%	3740 cd
40%	4987 cd
50%	6233 cd
60%	7480 cd
70%	8727 cd
80%	9973 cd

Conditions:

Number of c-planes: 4

Candela at center: 12467 cd

ISO LUX DIAGRAM

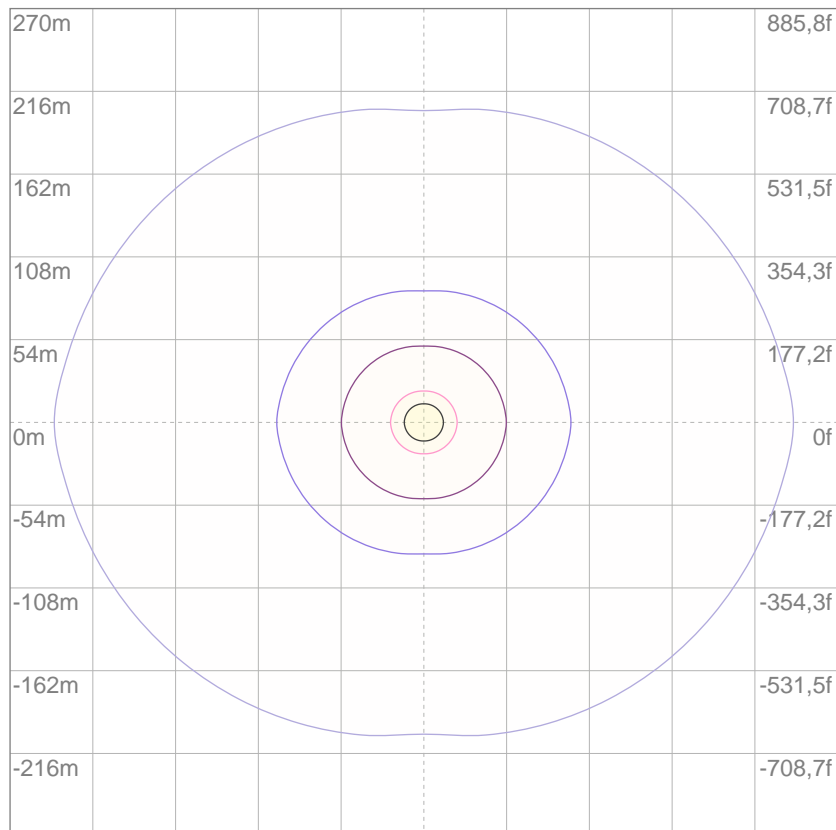

3%	3,74 lx
5%	6,23 lx
10%	12,5 lx
30%	37,4 lx
50%	62,3 lx

Conditions:

Number of c-planes: 4

Lux at center: 125 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

32794 lm

Peak candela output:

12480 cd

Light quality:

CRI: 95,5

Color temperature:

5931 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter LD

Target:


5600K

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:23:39

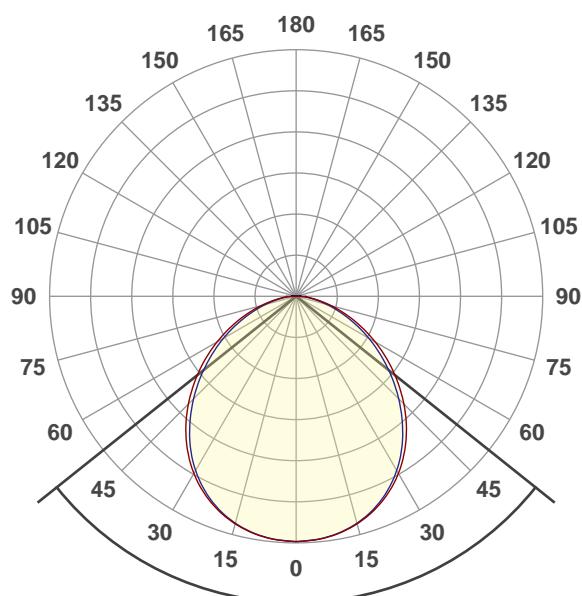




Beam angle 50%: 102,8°

Field angle 10%: 157°


Cut off angle 2.5%: 175,8°

Spectra

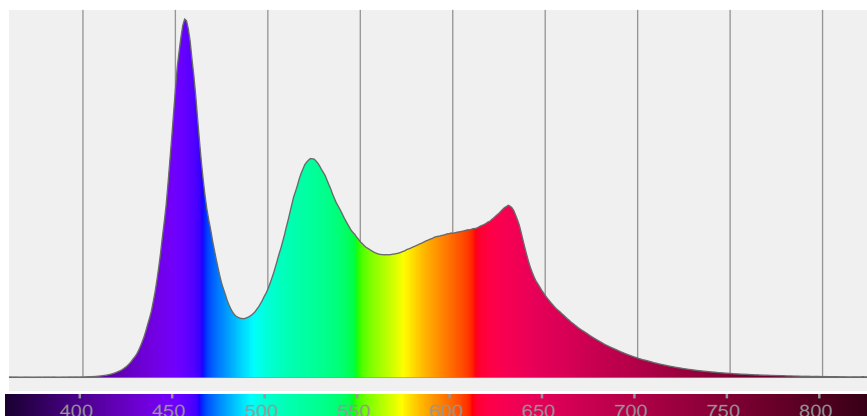


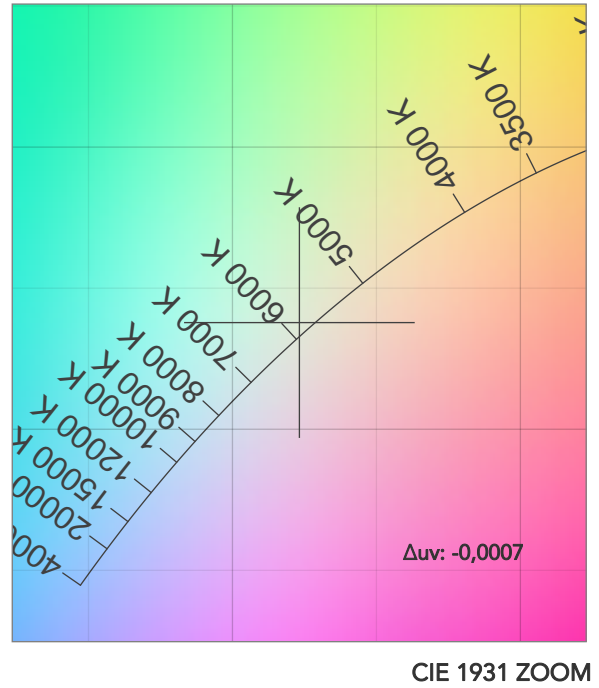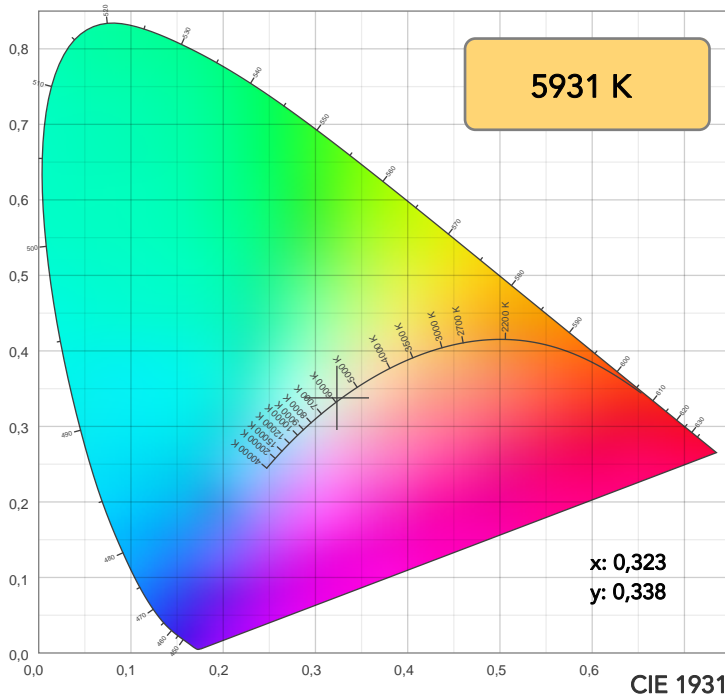

TM30: 89,5

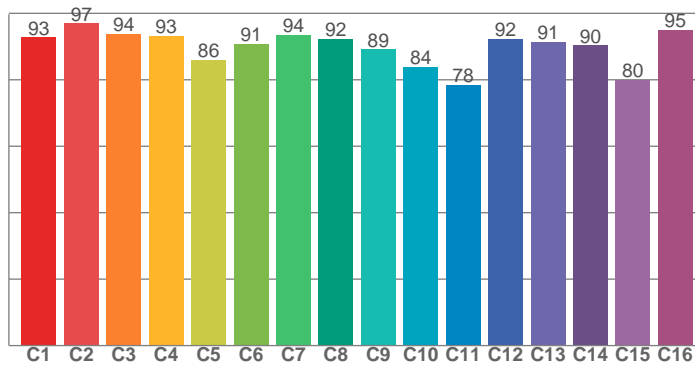

CRI: 95,5 (R1-R8)

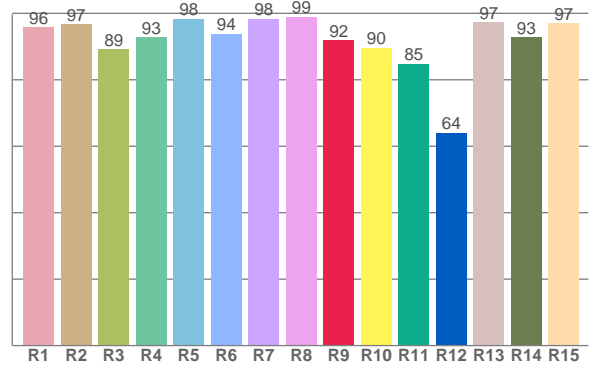

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,9	96,7	89,1	92,8	98,4	93,8	98,4	99,0	91,8	89,7	84,9	64,0	97,2	92,8	97,0


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,7	96,9	93,8	93,2	85,9	90,8	93,5	92,2	89,2	83,9	78,4	92,3	91,4	90,3	79,9	95,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93,6	98,9	83,5	87,2	95,5	96,0	94,6	98,6	93,0	93,2	98,5	97,9	97,2	96,6	96,0

CQS: 93,2

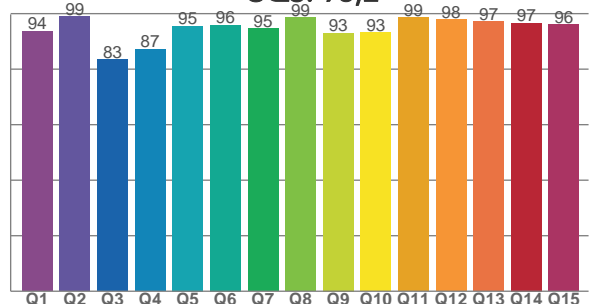

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
5931 K	95,5	91,8	89,5	102,5	93,2	92	0,323	0,338	-0,0007

TM30 DETAILS

Rf 89,5
Fidelity index Rf

Rg 102,5
Gammut index


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	93	-1%	0%
2	97	1%	0%
3	94	0%	1%
4	93	-1%	2%
5	86	-5%	1%
6	91	2%	3%
7	94	3%	0%
8	92	-1%	3%
9	89	-2%	8%
10	84	-1%	9%
11	78	3%	12%
12	92	3%	3%
13	91	5%	-1%
14	90	3%	1%
15	80	11%	-10%
16	95	1%	0%

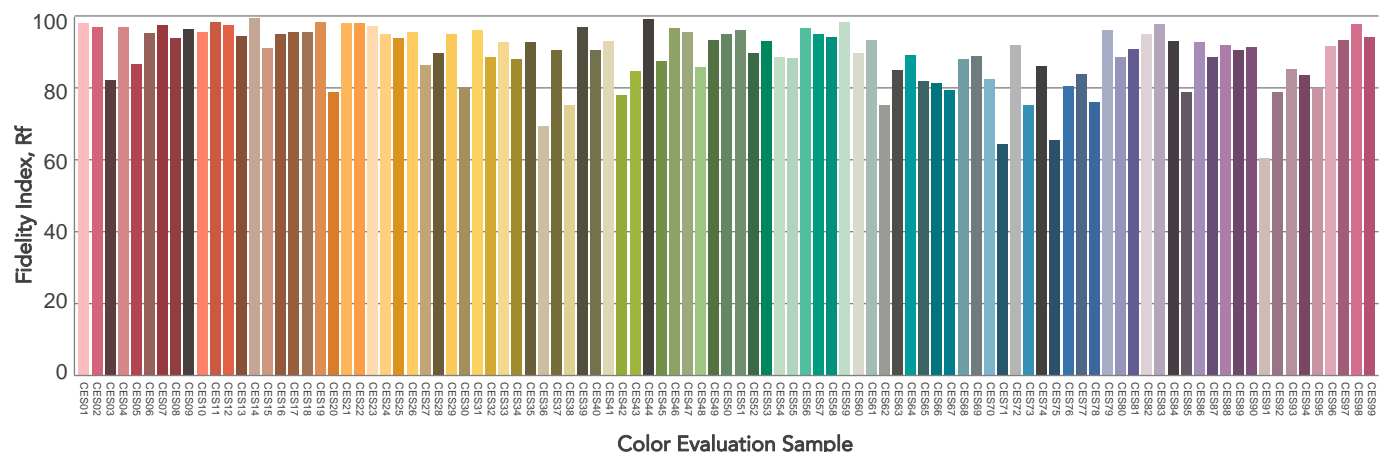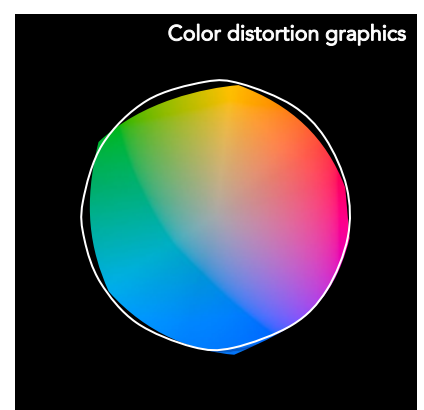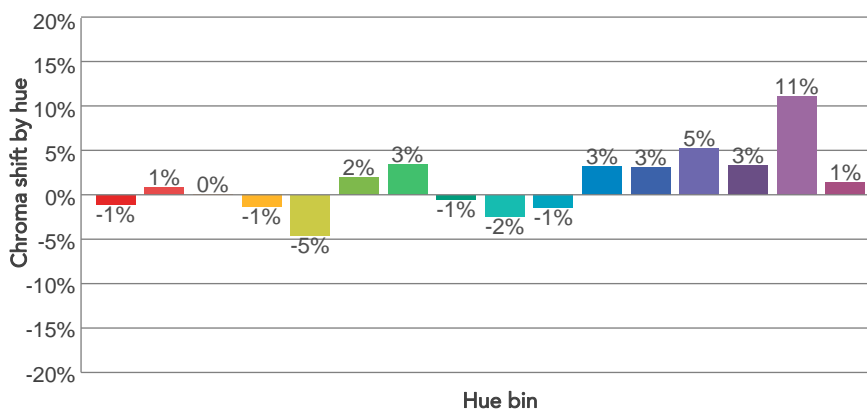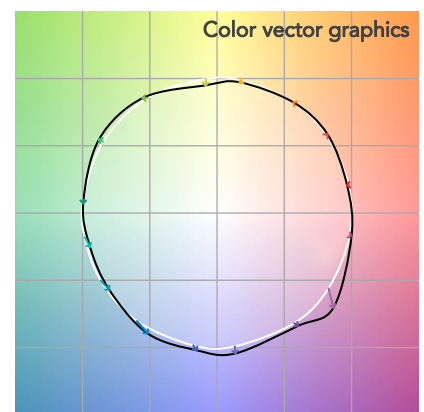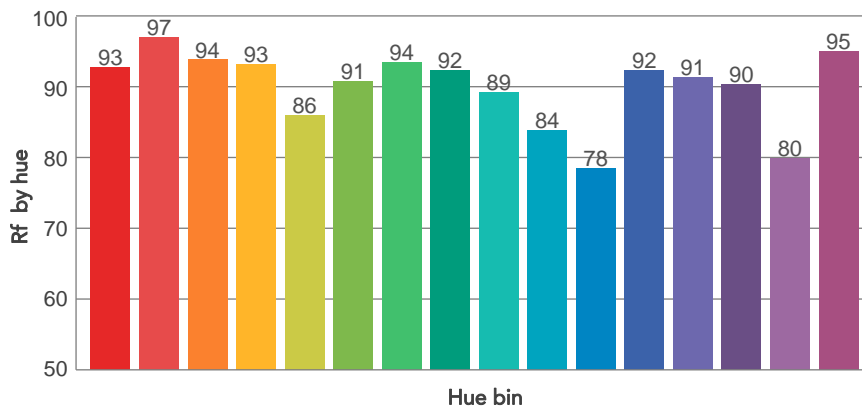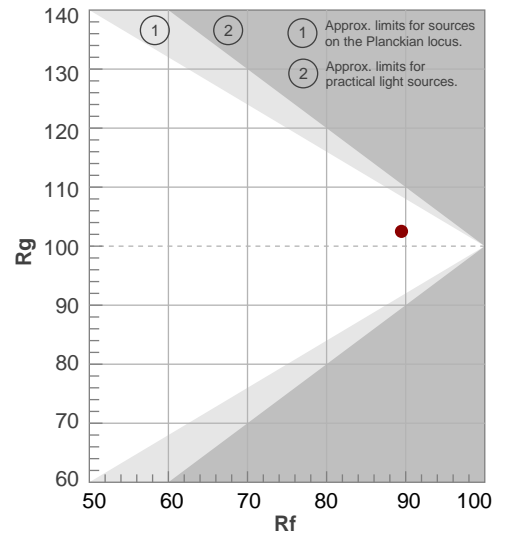

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,8°	157°	175,8°	80,2%	56,5%

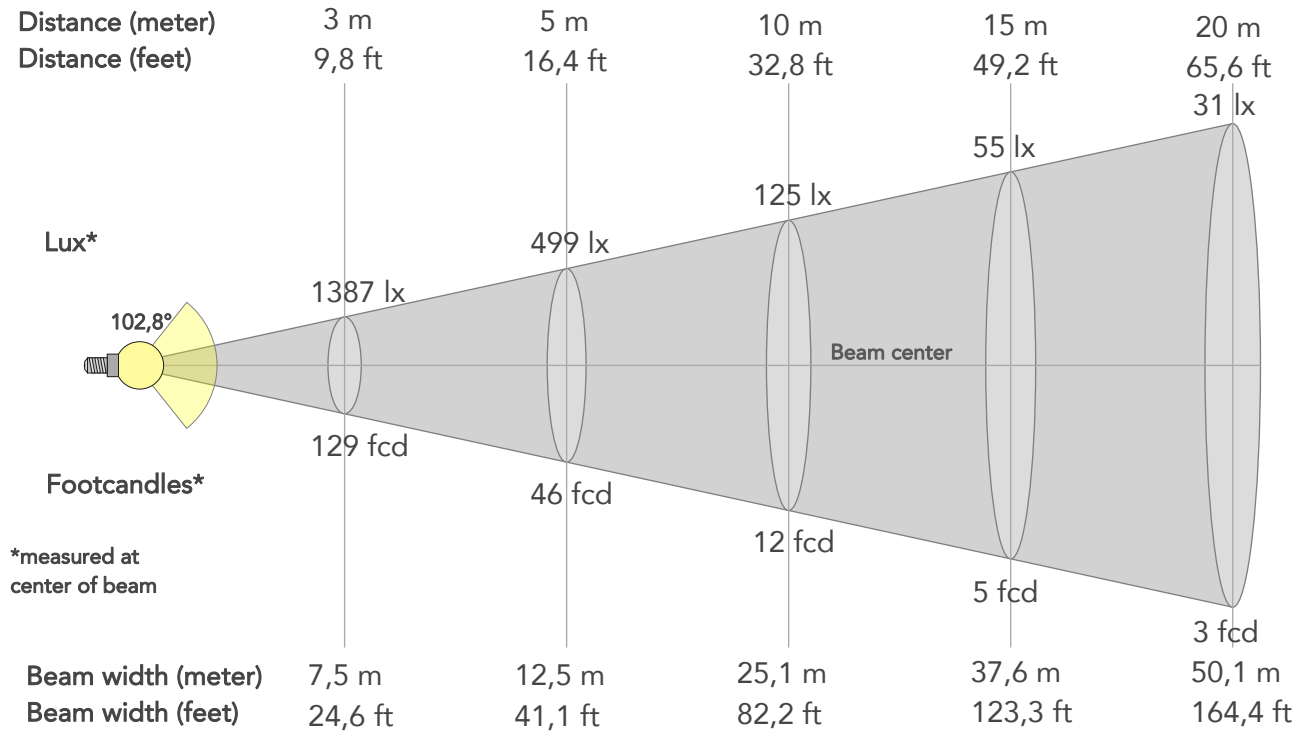

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	12479lx	3120lx	1387lx	780lx	499lx	222lx	125lx	55lx	31lx	20lx	14lx	8lx	5lx
Footcand.	1159fcd	290fcd	129fcd	72fcd	46fcd	21fcd	12fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,5m	10m	12,5m	18,8m	25,1m	37,6m	50,1m	62,7m	75,2m	100,2m	125,3m
Beam wid.	8,3ft	16,5ft	24,6ft	32,8ft	41,1ft	61,7ft	82,2ft	123,3ft	164,4ft	205,5ft	246,6ft	328,8ft	411ft


LINEAR DISTRIBUTION DIAGRAM

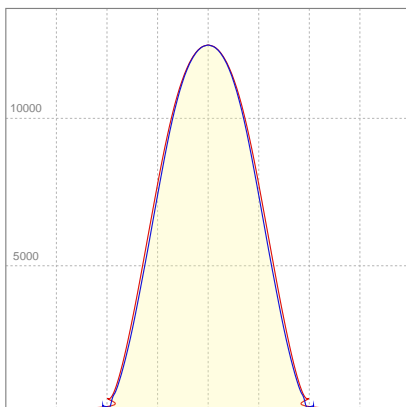

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
224V	2,05A	440,2W	74lm/W

ISO CANDELA DIAGRAM

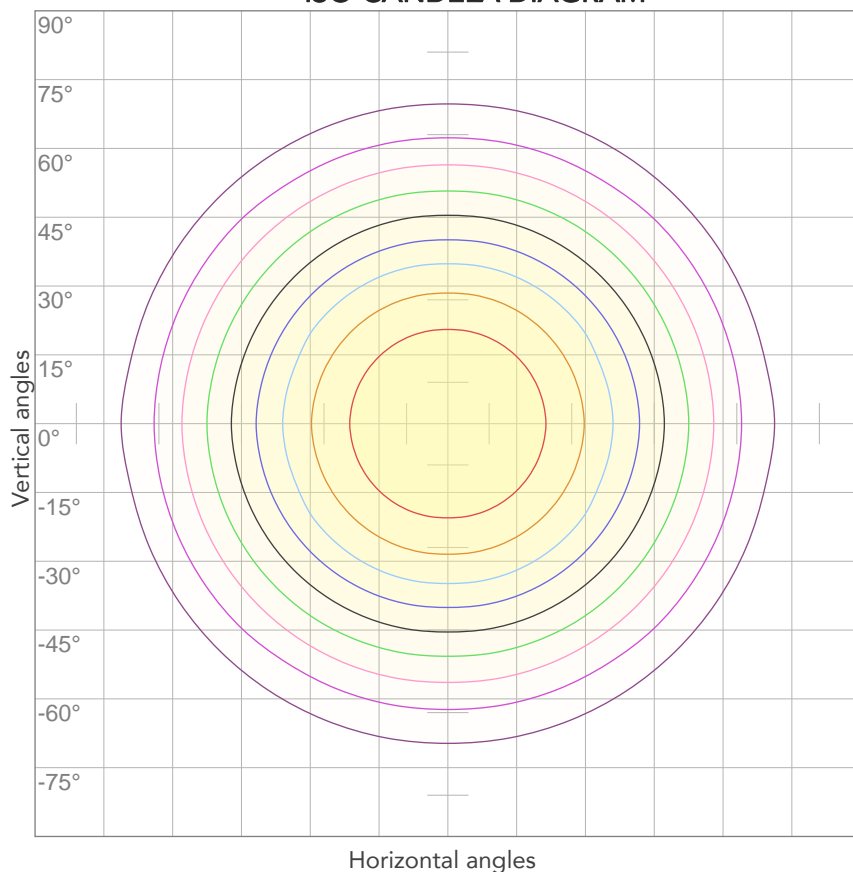


10%	1248 cd
20%	2496 cd
30%	3744 cd
40%	4992 cd
50%	6239 cd
60%	7487 cd
70%	8735 cd
80%	9983 cd

Conditions:

Number of c-planes: 4

Candela at center: 12479 cd

ISO LUX DIAGRAM

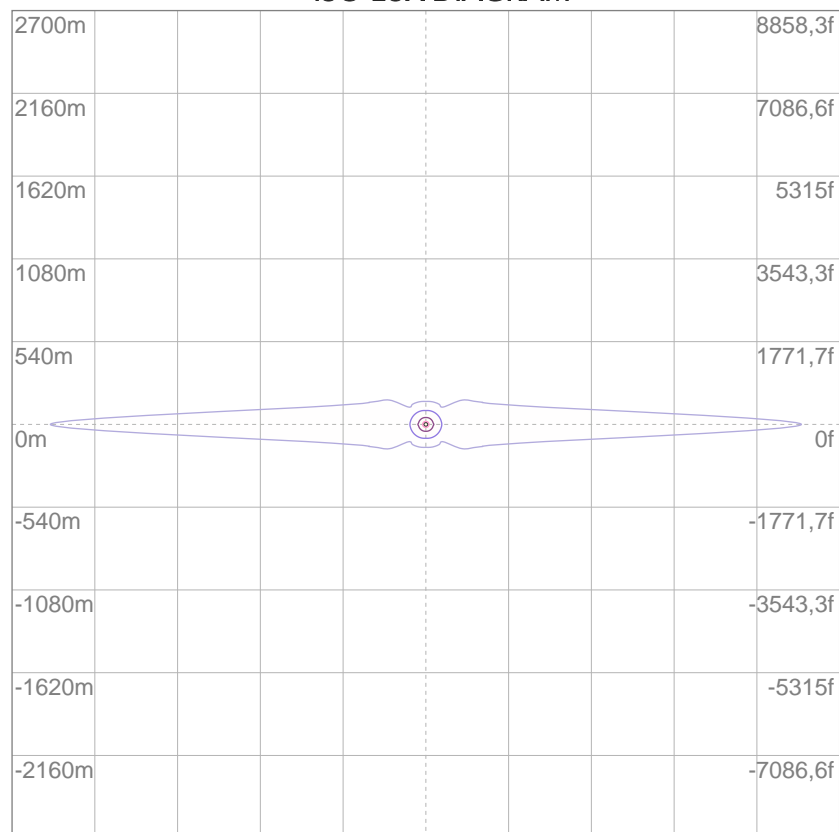

3%	3,74 lx
5%	6,24 lx
10%	12,5 lx
30%	37,4 lx
50%	62,4 lx

Conditions:

Number of c-planes: 4

Lux at center: 125 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

28788 lm

Peak candela output:

17294 cd

Light quality:

CRI: 93,3

Color temperature:

5884 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter Int.

Target:


5600K

Operator:

Paolo Carvone

Date and time:

14/08/2020 10:39:11

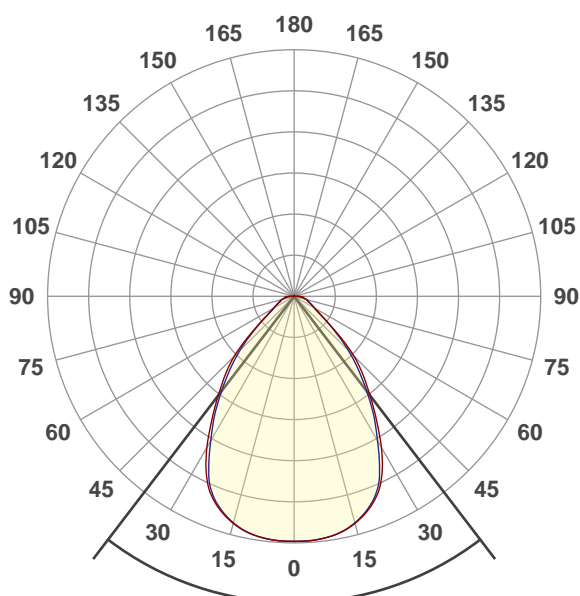




Beam angle 50%: 74,8°

Field angle 10%: 118,6°


Cut off angle 2.5%: 171°

Spectra

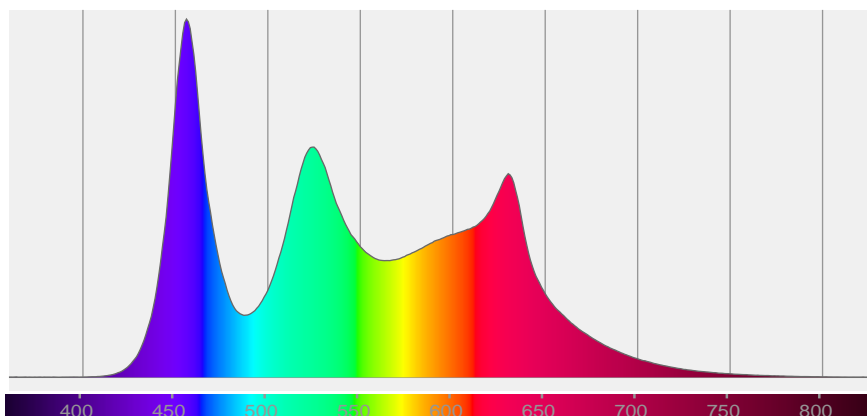


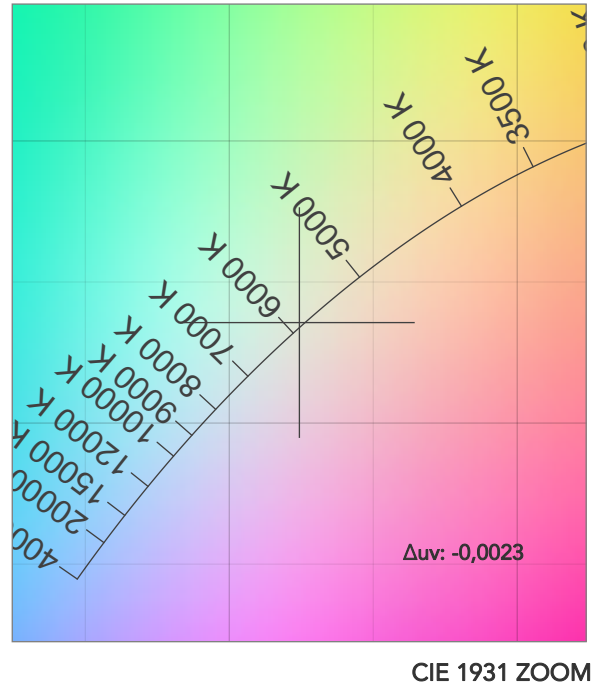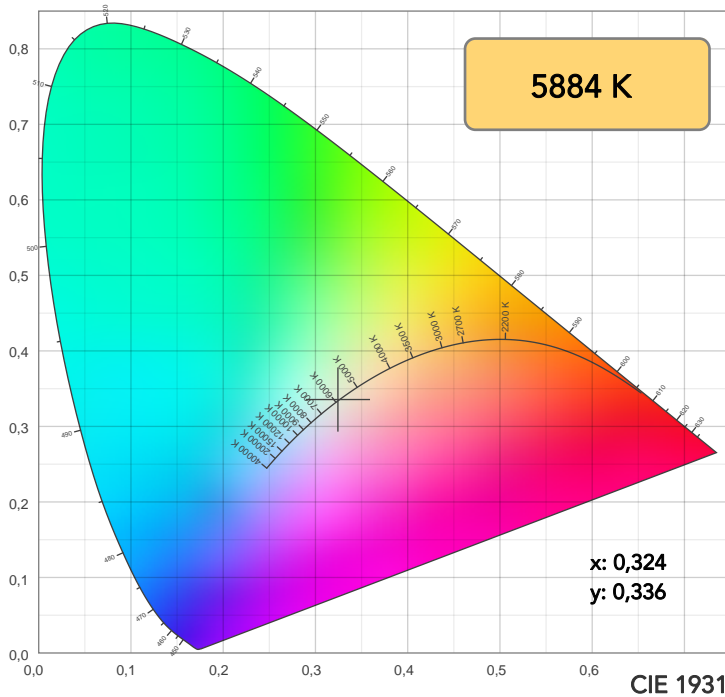

TM30: 89,1

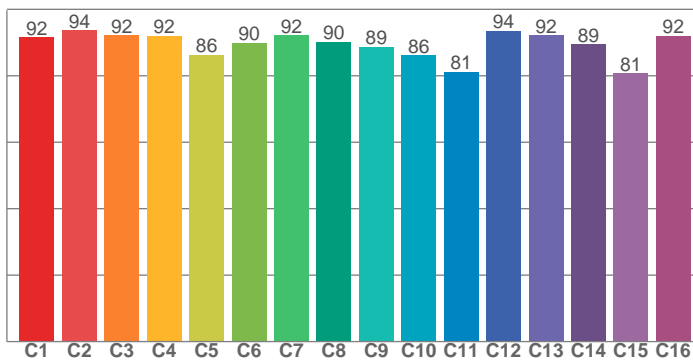

CRI: 93,3 (R1-R8)

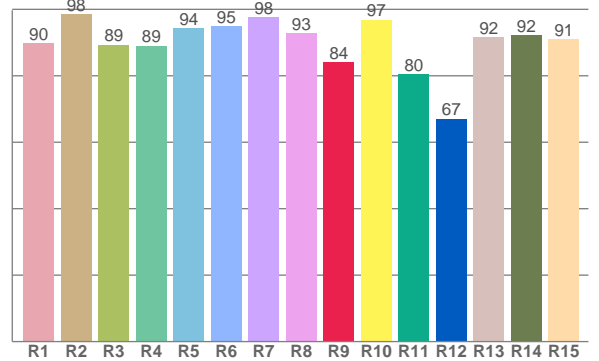

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
89,9	98,5	89,3	89,0	94,2	94,9	97,6	92,8	84,1	96,8	80,4	67,1	91,6	92,3	91,1


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91,5	93,6	92,2	92,0	86,3	89,9	92,2	90,2	88,8	86,1	81,2	93,6	92,1	89,5	80,7	92,1

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93,7	99,2	85,9	90,4	98,2	96,7	96,8	96,5	92,1	95,4	96,8	93,9	94,1	95,6	95,1

CQS: 93,8

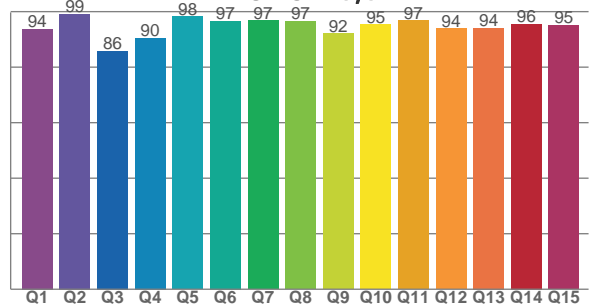

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
5884 K	93,3	84,1	89,1	103,8	93,8	93	0,324	0,336	-0,0023

TM30 DETAILS

Rf 89,1
Fidelity index Rf


Rg 103,8
Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	2%	1%
2	94	3%	-1%
3	92	1%	-2%
4	92	-3%	-2%
5	86	-5%	1%
6	90	1%	4%
7	92	4%	1%
8	90	1%	4%
9	89	0%	8%
10	86	0%	8%
11	81	4%	10%
12	94	3%	2%
13	92	4%	0%
14	89	3%	3%
15	81	12%	-6%
16	92	3%	1%

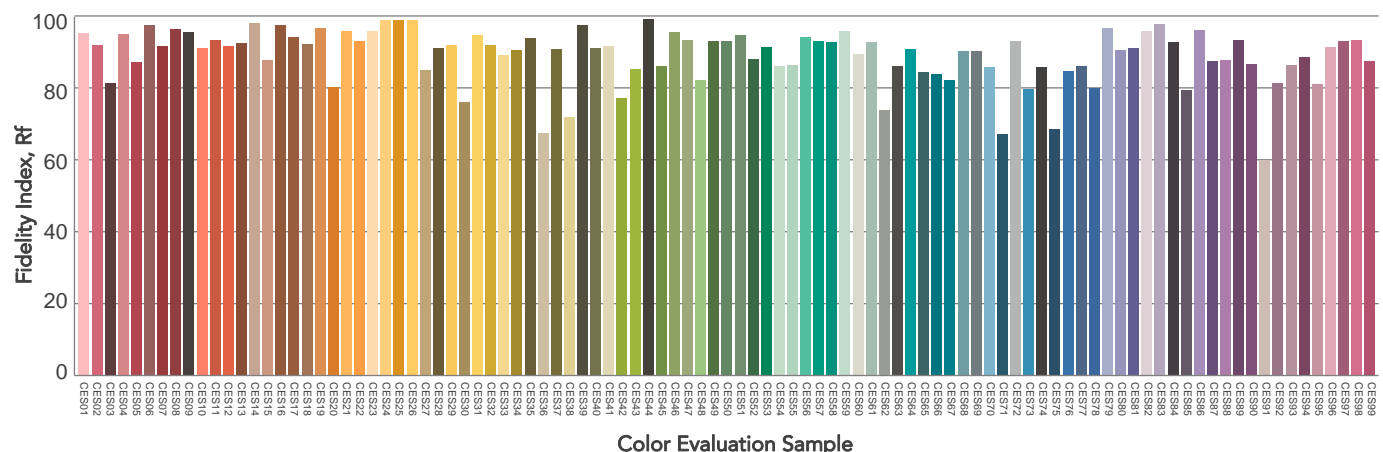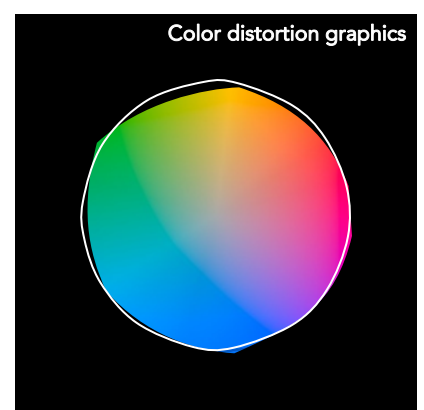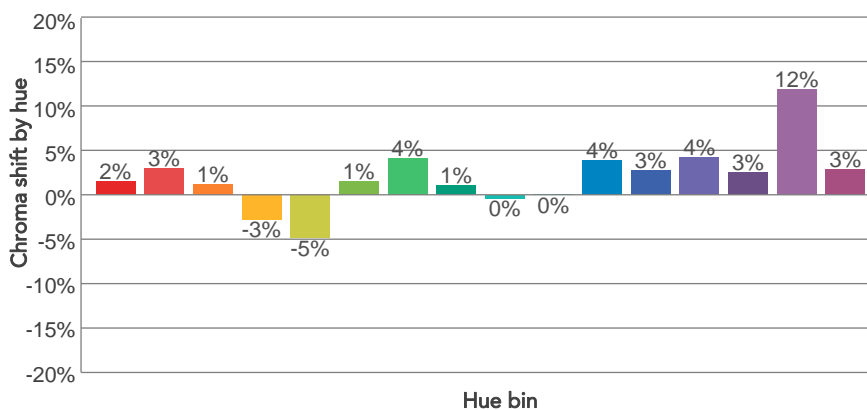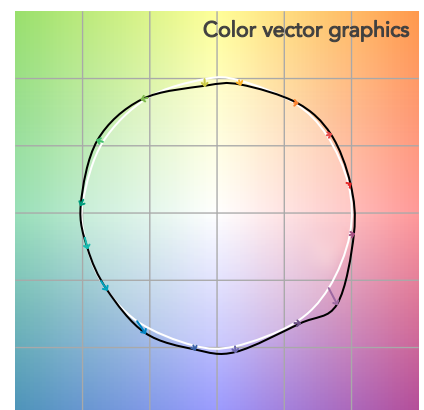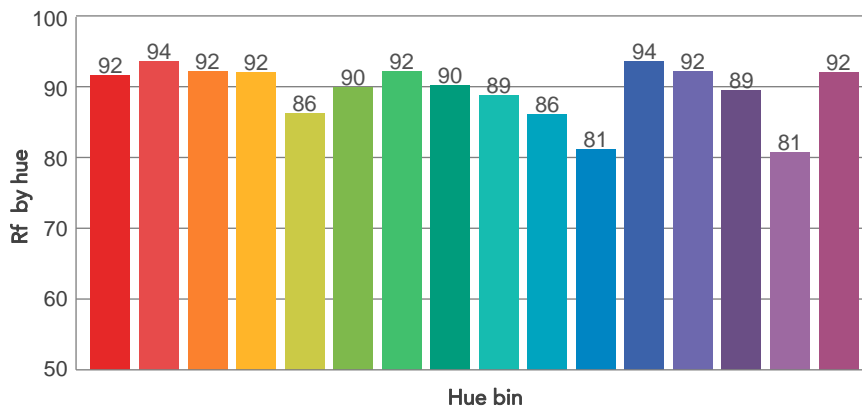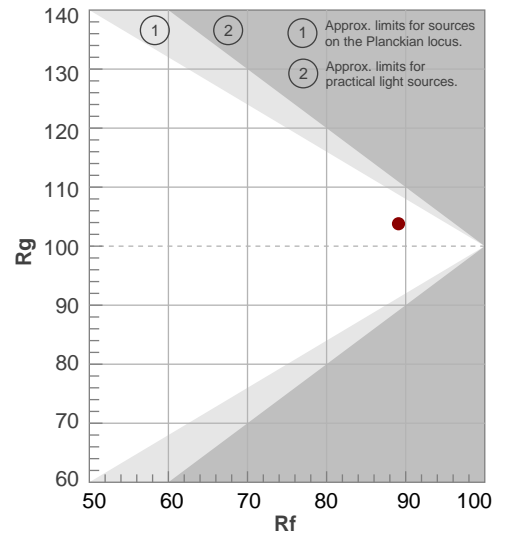

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
74,8°	118,6°	171°	88,1%	74,0%

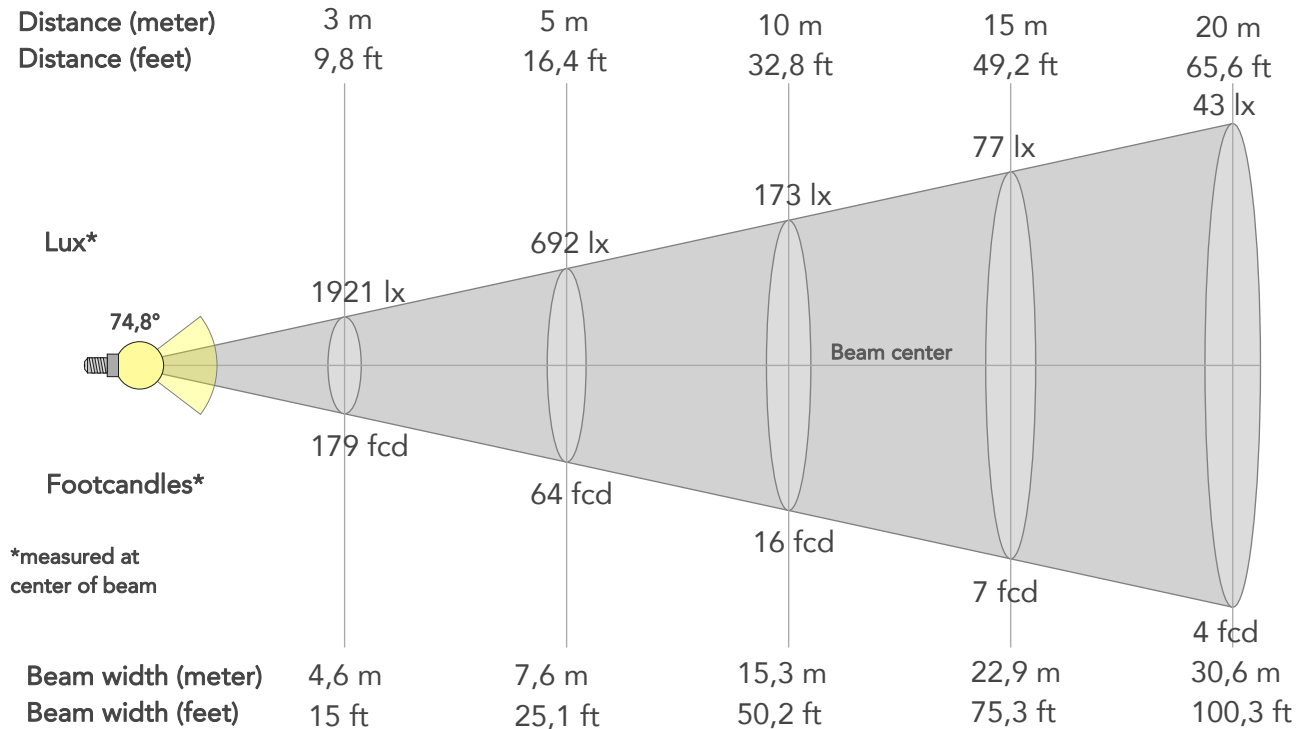

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	17293lx	4323lx	1921lx	1081lx	692lx	307lx	173lx	77lx	43lx	28lx	19lx	11lx	7lx
Footcand.	1607fcd	402fcd	179fcd	100fcd	64fcd	29fcd	16fcd	7fcd	4fcd	3fcd	2fcd	1fcd	1fcd
Beam wid.	1,5m	3,1m	4,6m	6,1m	7,6m	11,5m	15,3m	22,9m	30,6m	38,2m	45,9m	61,2m	76,5m
Beam wid.	5ft	10,1ft	15ft	20ft	25,1ft	37,6ft	50,2ft	75,3ft	100,3ft	125,4ft	150,5ft	200,7ft	250,9ft


LINEAR DISTRIBUTION DIAGRAM

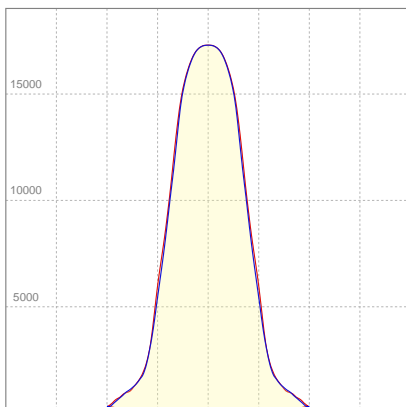

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	2,04A	445W	65lm/W

ISO CANDELA DIAGRAM

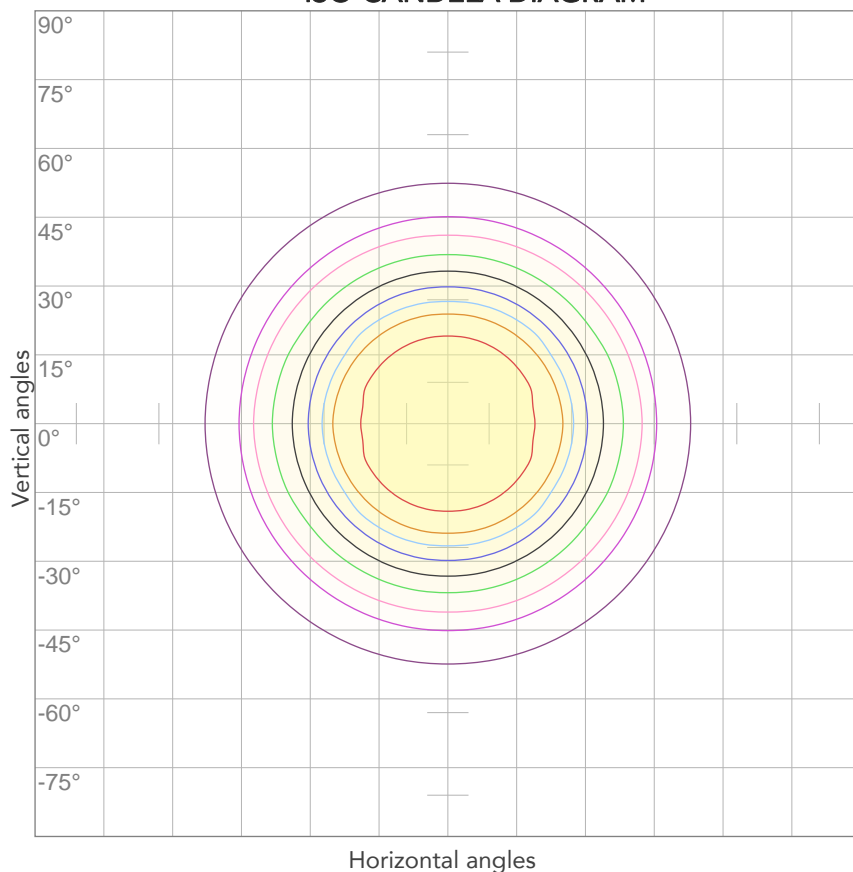


10%	1729 cd
20%	3459 cd
30%	5188 cd
40%	6917 cd
50%	8646 cd
60%	10376 cd
70%	12105 cd
80%	13834 cd

Conditions:

Number of c-planes: 4

Candela at center: 17293 cd

ISO LUX DIAGRAM

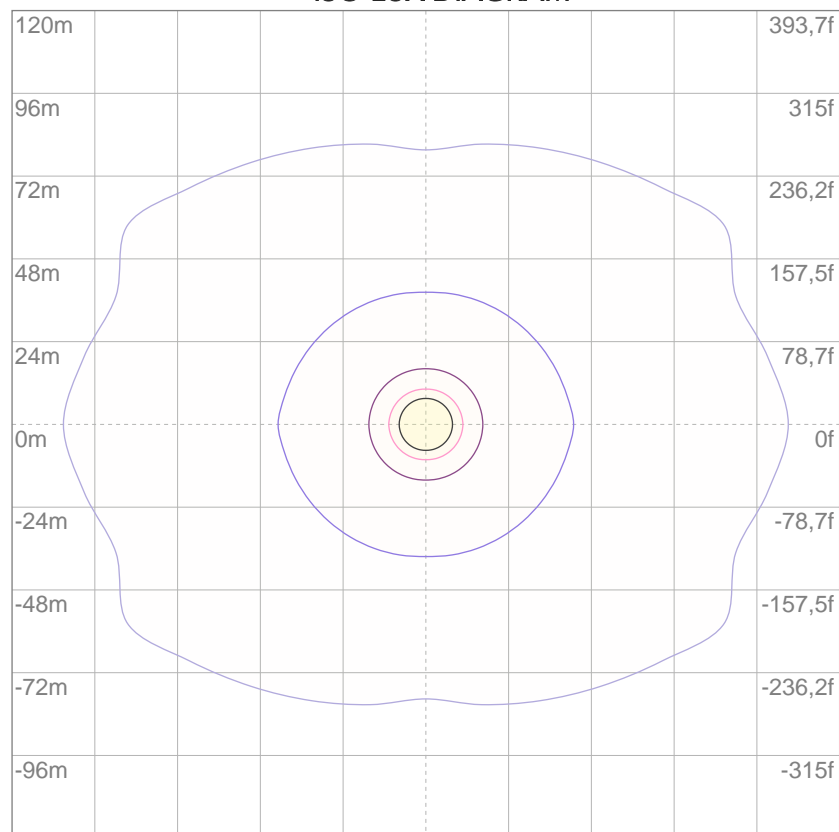

3%	5,19 lx
5%	8,65 lx
10%	17,3 lx
30%	51,9 lx
50%	86,5 lx

Conditions:

Number of c-planes: 4

Lux at center: 173 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

27967 lm

Peak candela output:

9534 cd

Light quality:

CRI: 94,6

Color temperature:

6718 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter HD

Target:


6000K

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:07:06

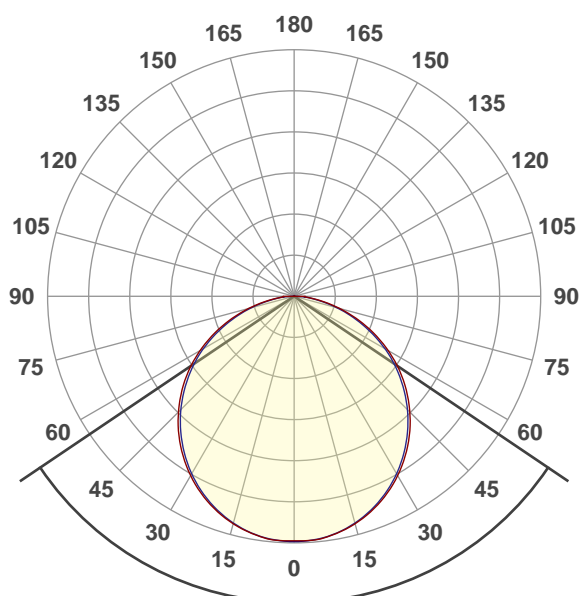




Beam angle 50%: 112°

Field angle 10%: 161,8°


Cut off angle 2.5%: 176,4°

Spectra

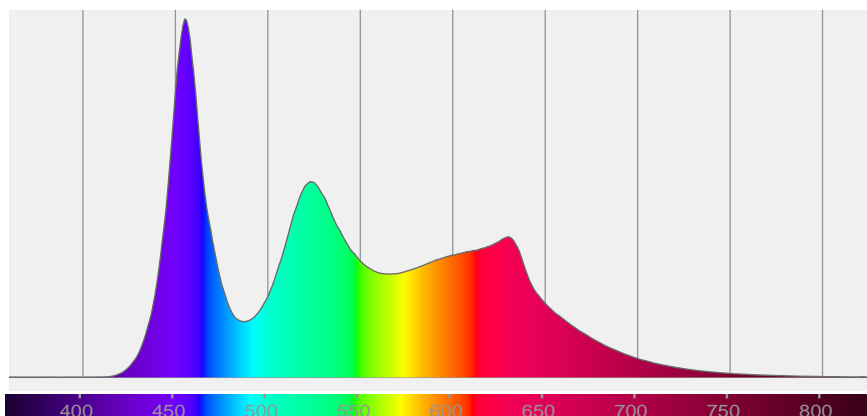


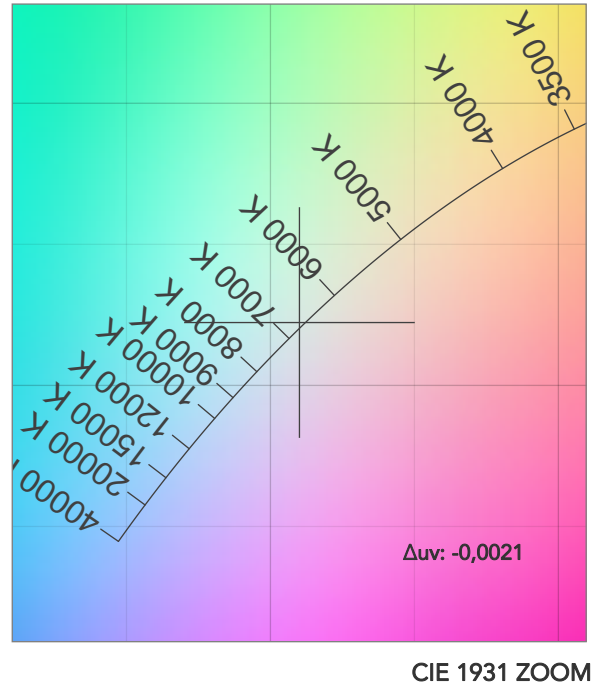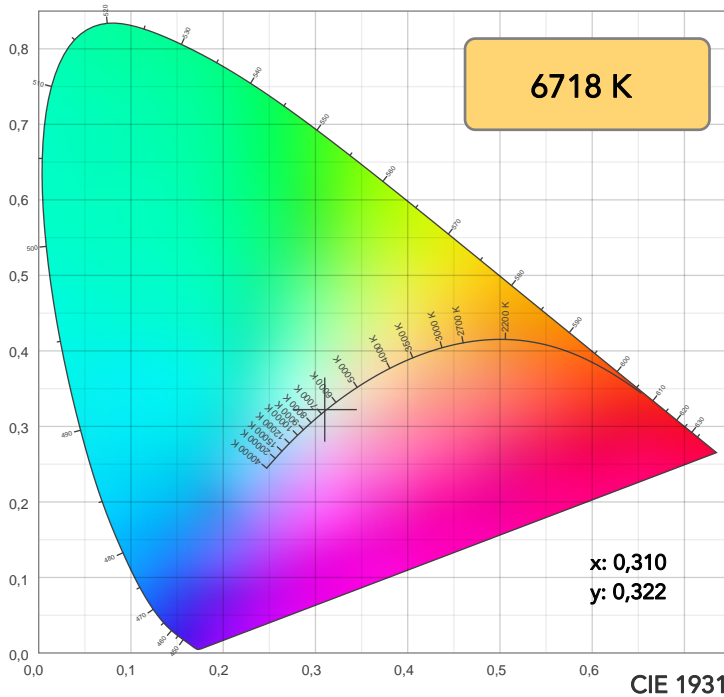

TM30: 88,7

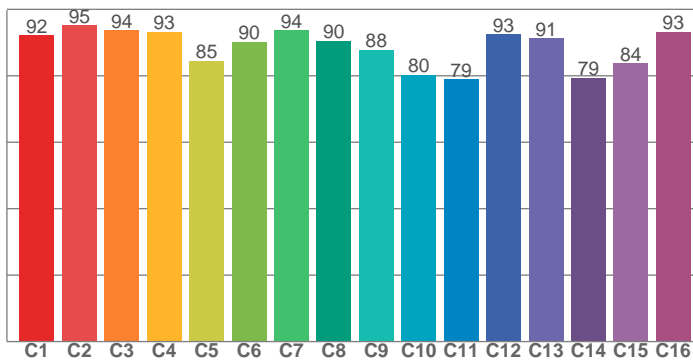

CRI: 94,6 (R1-R8)

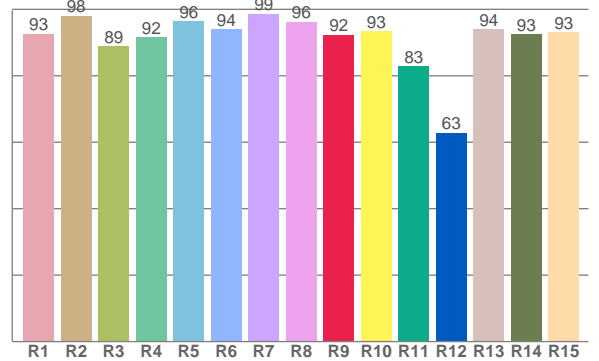

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
92,6	98,0	88,9	91,7	96,4	94,0	98,7	96,2	92,4	93,3	82,9	62,8	94,1	92,5	93,2


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,1	95,2	93,7	93,3	84,5	90,3	93,7	90,5	87,7	80,2	78,9	92,5	91,2	79,3	83,8	93,3

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
93,4	99,0	83,8	86,7	95,5	97,3	96,4	97,5	92,2	94,0	99,0	96,4	96,0	96,3	96,0

CQS: 93,2

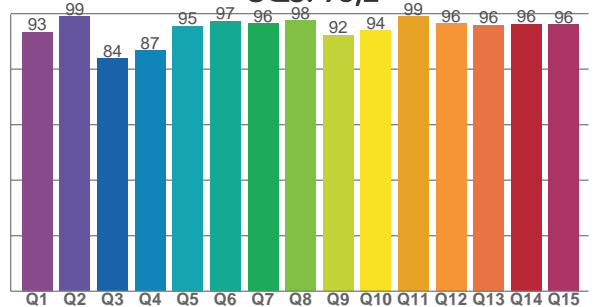

COLOR PARAMETERS






Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
6718 K	94,6	92,4	88,7	103,0	93,2	94	0,310	0,322	-0,0021

TM30 DETAILS

Rf 88,7
Fidelity index Rf


Rg 103,0
Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	1%	1%
2	95	2%	0%
3	94	1%	-1%
4	93	-2%	1%
5	85	-6%	0%
6	90	1%	3%
7	94	3%	1%
8	90	0%	4%
9	88	-2%	9%
10	80	-1%	13%
11	79	3%	10%
12	93	3%	3%
13	91	5%	2%
14	79	14%	0%
15	84	8%	-5%
16	93	2%	1%

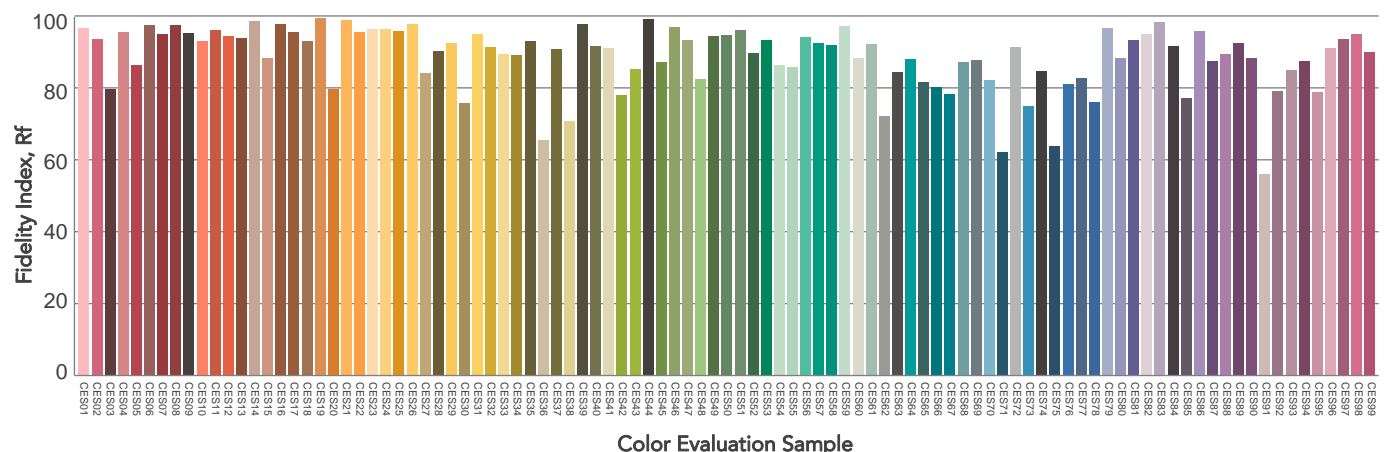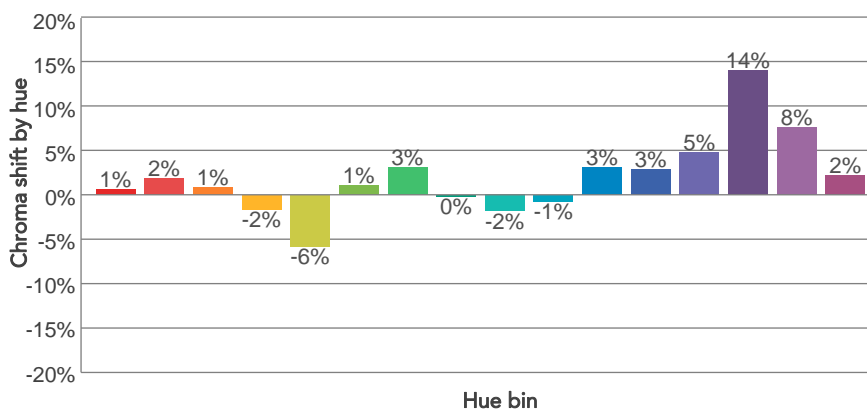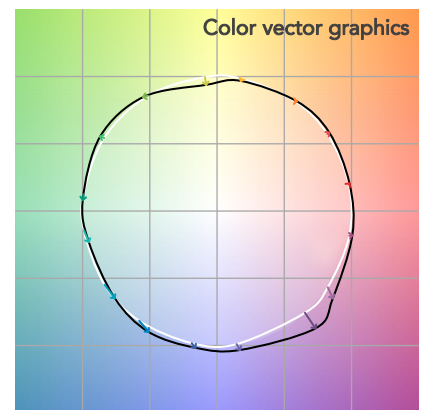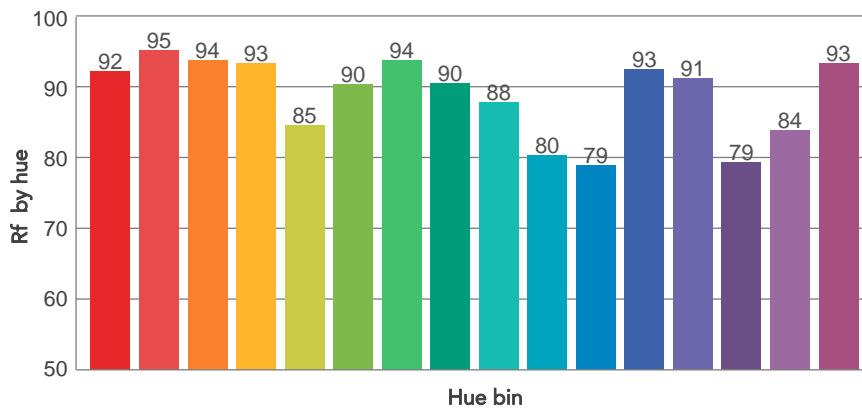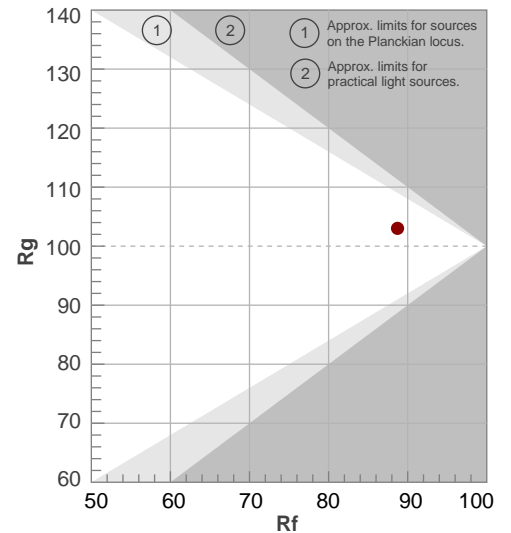

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
112°	161,8°	176,4°	76,2%	51,9%

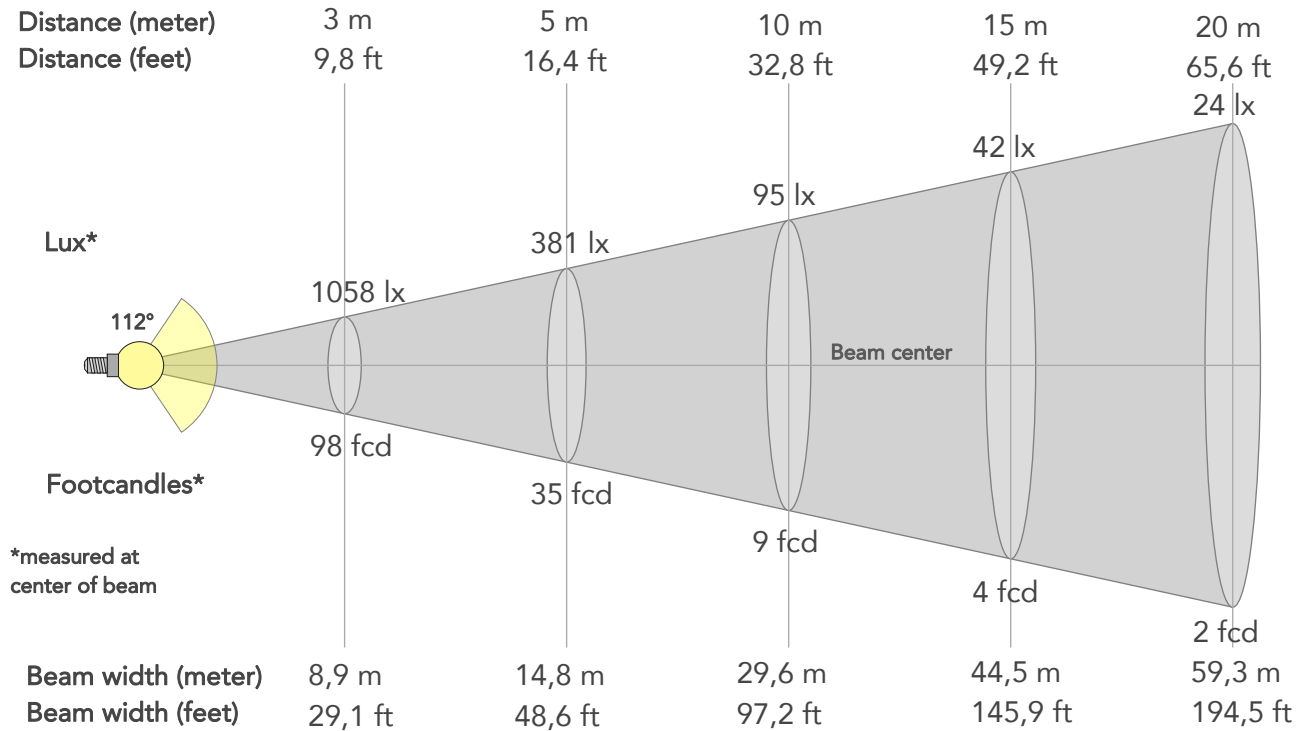

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	9526lx	2381lx	1058lx	595lx	381lx	169lx	95lx	42lx	24lx	15lx	11lx	6lx	4lx
Footcand.	885fcd	221fcd	98fcd	55fcd	35fcd	16fcd	9fcd	4fcd	2fcd	1fcd	1fcd	1fcd	0fcd
Beam wid.	3m	5,9m	8,9m	11,9m	14,8m	22,2m	29,6m	44,5m	59,3m	74,1m	88,9m	118,6m	148,2m
Beam wid.	9,8ft	19,6ft	29,1ft	38,8ft	48,6ft	72,9ft	97,2ft	145,9ft	194,5ft	243,1ft	291,7ft	389ft	486,2ft


LINEAR DISTRIBUTION DIAGRAM

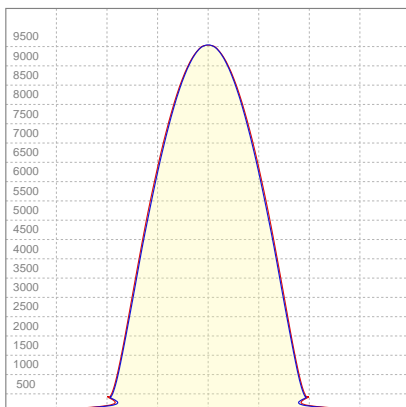

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
225V	2,05A	439,4W	64lm/W

ISO CANDELA DIAGRAM

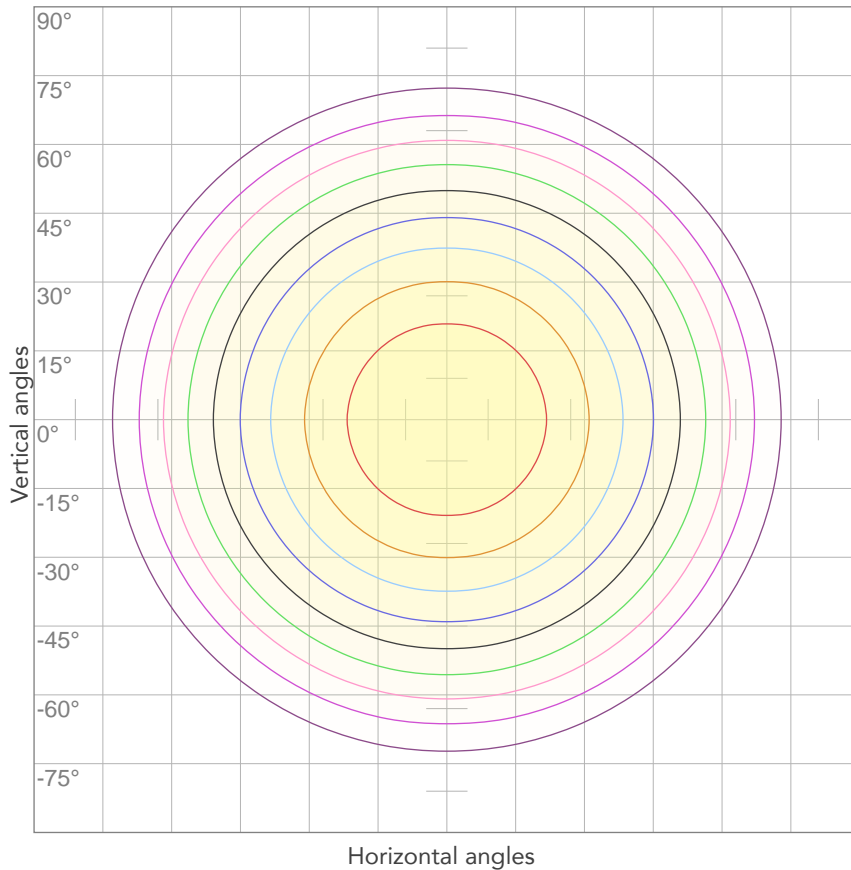


10%	953 cd
20%	1905 cd
30%	2858 cd
40%	3810 cd
50%	4763 cd
60%	5716 cd
70%	6668 cd
80%	7621 cd

Conditions:

Number of c-planes: 4

Candela at center: 9526 cd

ISO LUX DIAGRAM

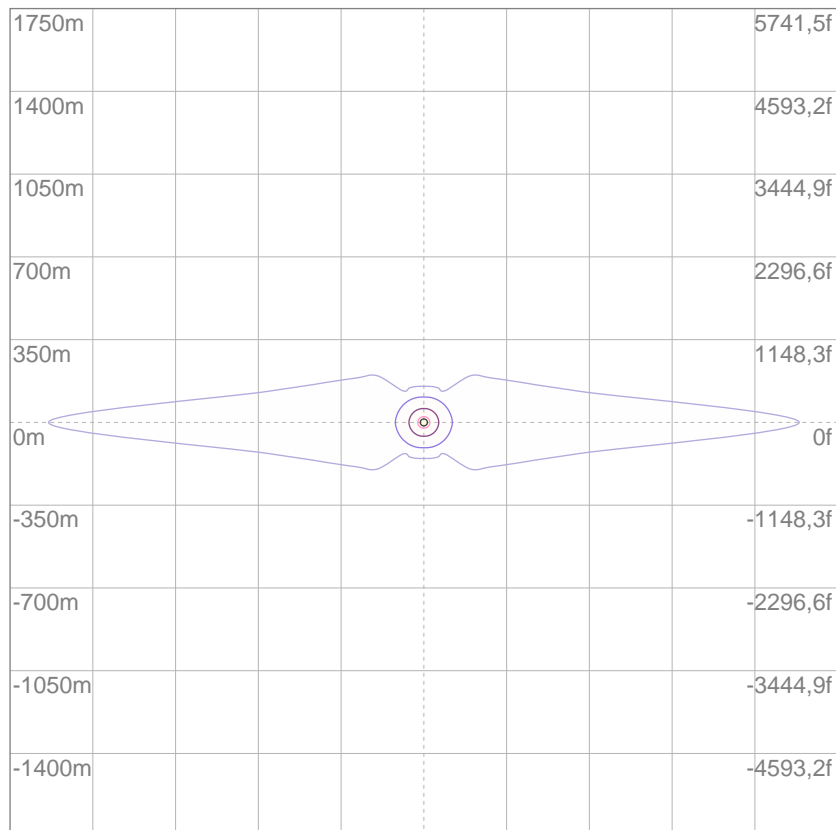

3%	2,86 lx
5%	4,76 lx
10%	9,53 lx
30%	28,6 lx
50%	47,6 lx

Conditions:

Number of c-planes: 4

Lux at center: 95,3 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

32820 lm

Peak candela output:

12377 cd

Light quality:

CRI: 95,5

Color temperature:

6366 K

PRODUCT NAME:

ECLPANEL TWC

MEASUREMENT CONDITIONS:

Beam angle:

Filter MD

Target:


6000K

Operator:


Paolo Carvone



Date and time:

14/05/2020 17:43:54

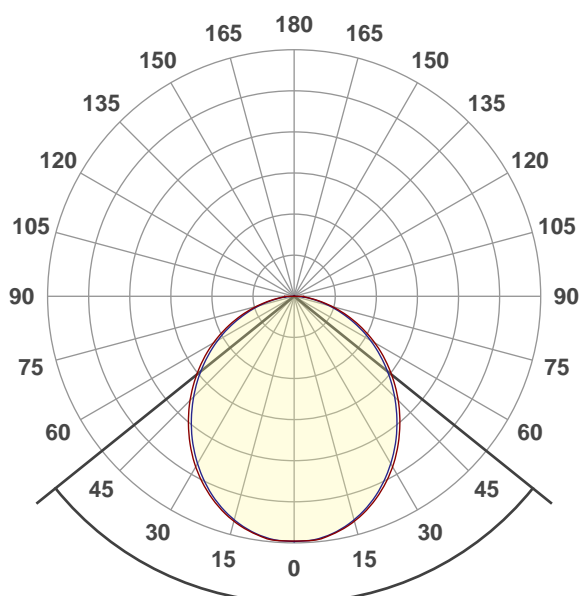


Spectra

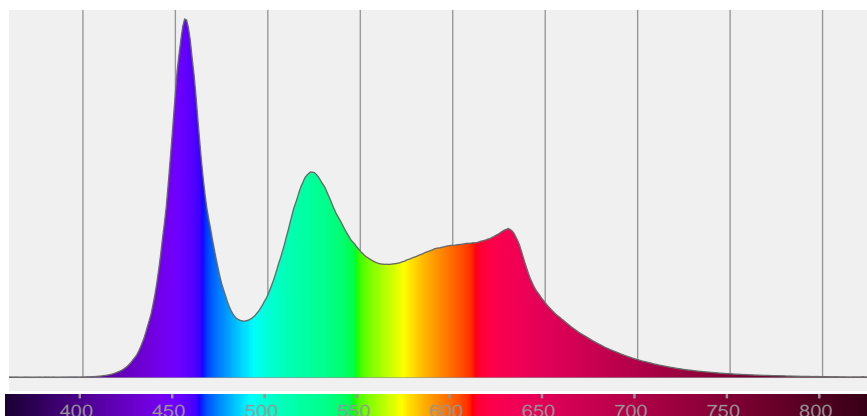


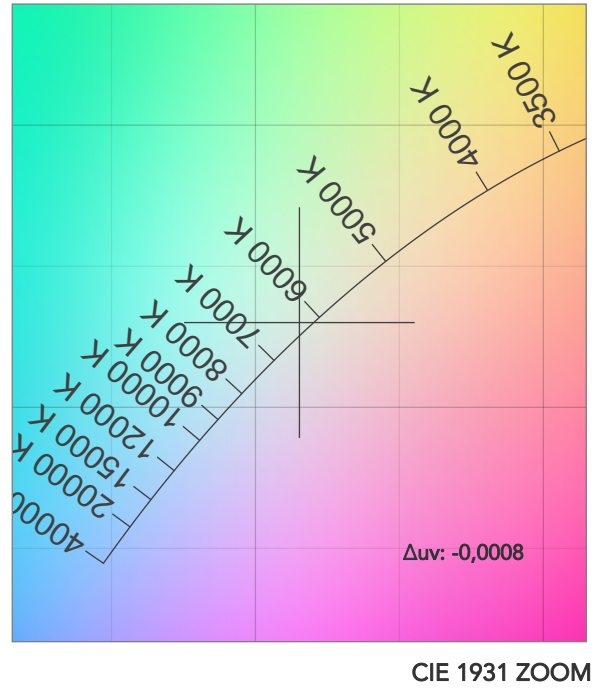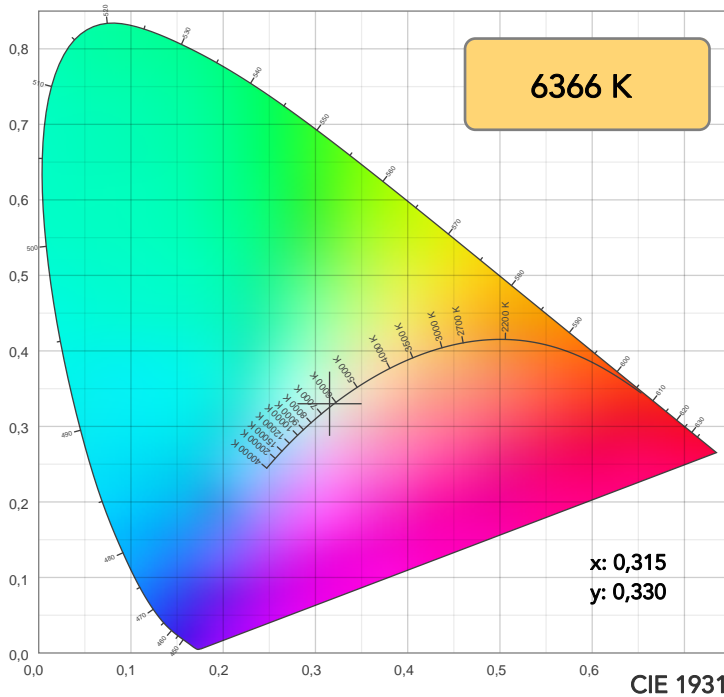

TM30: 88,9

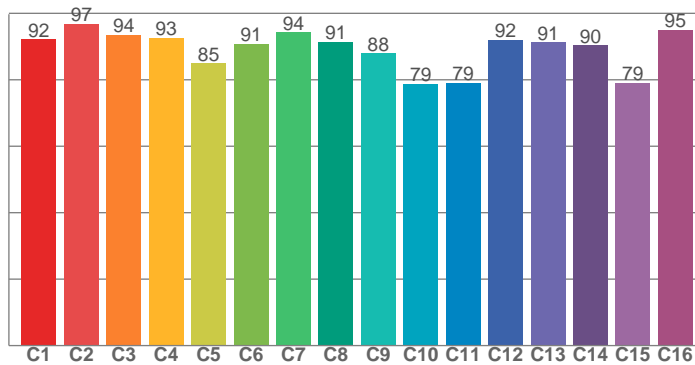

CRI: 95,5 (R1-R8)

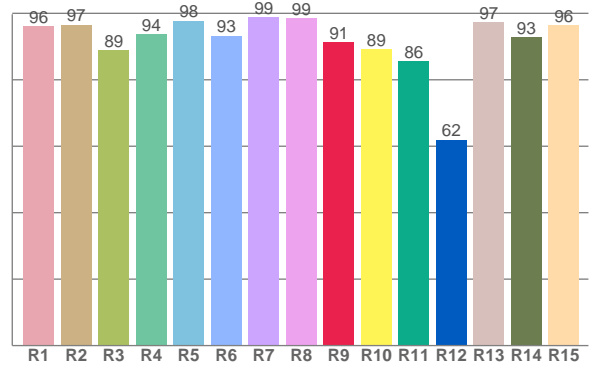

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
96,0	96,6	88,9	93,7	97,8	93,3	98,8	98,6	91,4	89,2	85,6	62,0	97,3	92,7	96,4


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,2	96,9	93,5	92,7	85,0	90,7	94,3	91,4	88,0	78,7	79,0	92,0	91,2	90,4	79,1	95,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92,9	98,9	83,0	85,5	94,0	96,9	94,8	98,7	92,8	92,8	98,3	98,3	97,4	96,4	95,7

CQS: 92,8

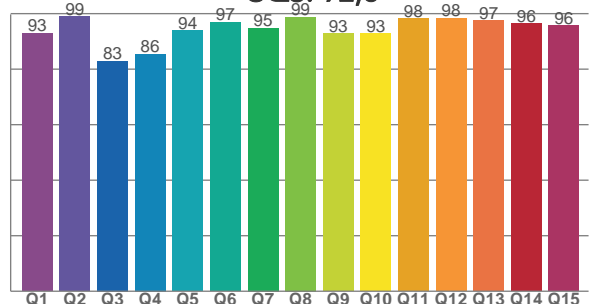

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
6366 K	95,5	91,4	88,9	101,9	92,8	93	0,315	0,330	-0,0008

TM30 DETAILS

Rf 88,9
Fidelity index Rf

Rg 101,9
Gammut index


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	-1%	0%
2	97	1%	0%
3	94	0%	0%
4	93	-1%	2%
5	85	-5%	1%
6	91	1%	3%
7	94	3%	0%
8	91	-1%	3%
9	88	-3%	9%
10	79	-2%	12%
11	79	3%	11%
12	92	3%	3%
13	91	5%	0%
14	90	3%	1%
15	79	12%	-10%
16	95	1%	0%

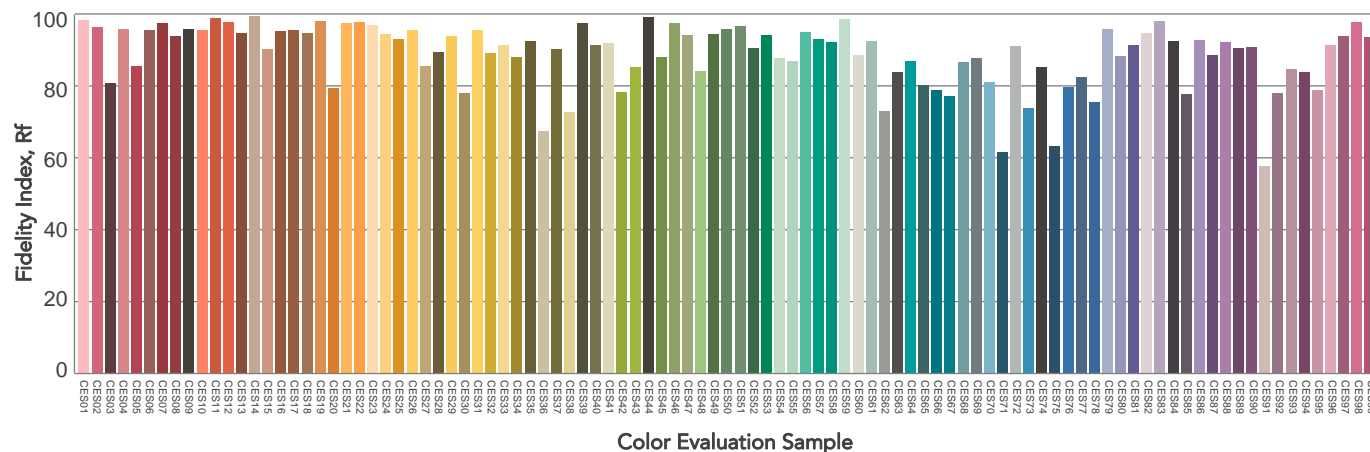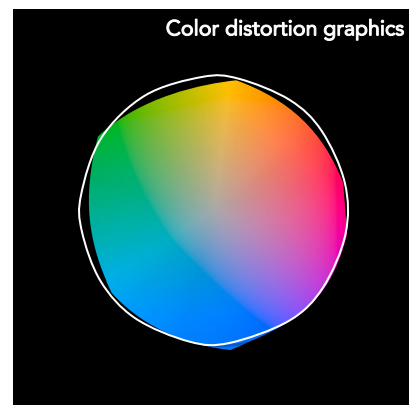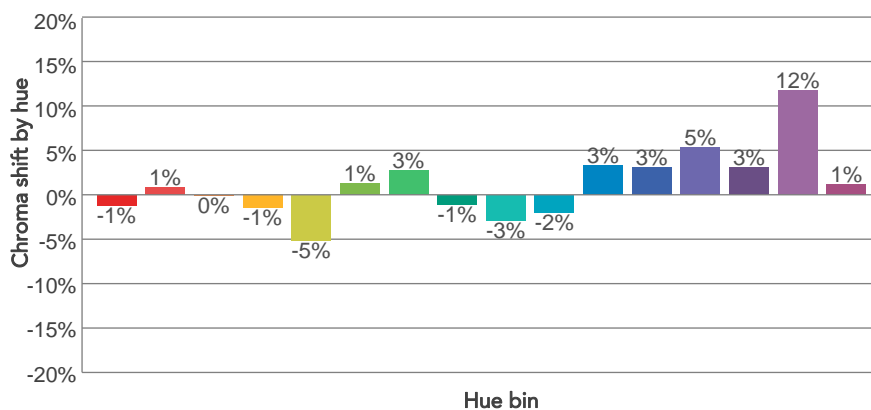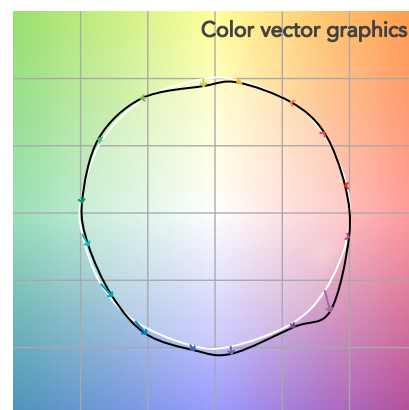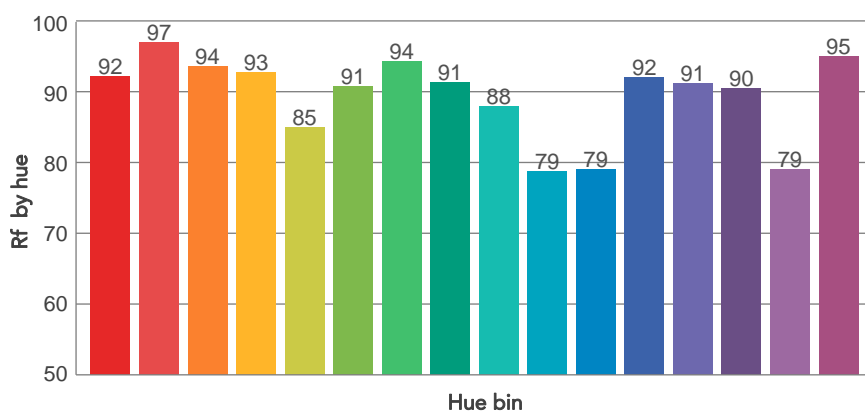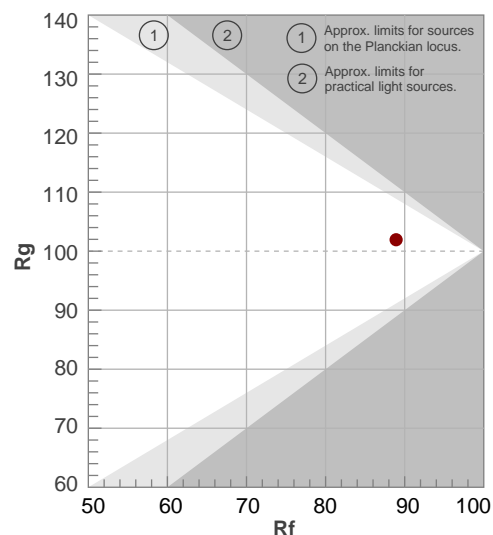

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,4°	158,6°	175,9°	77,9%	54,4%

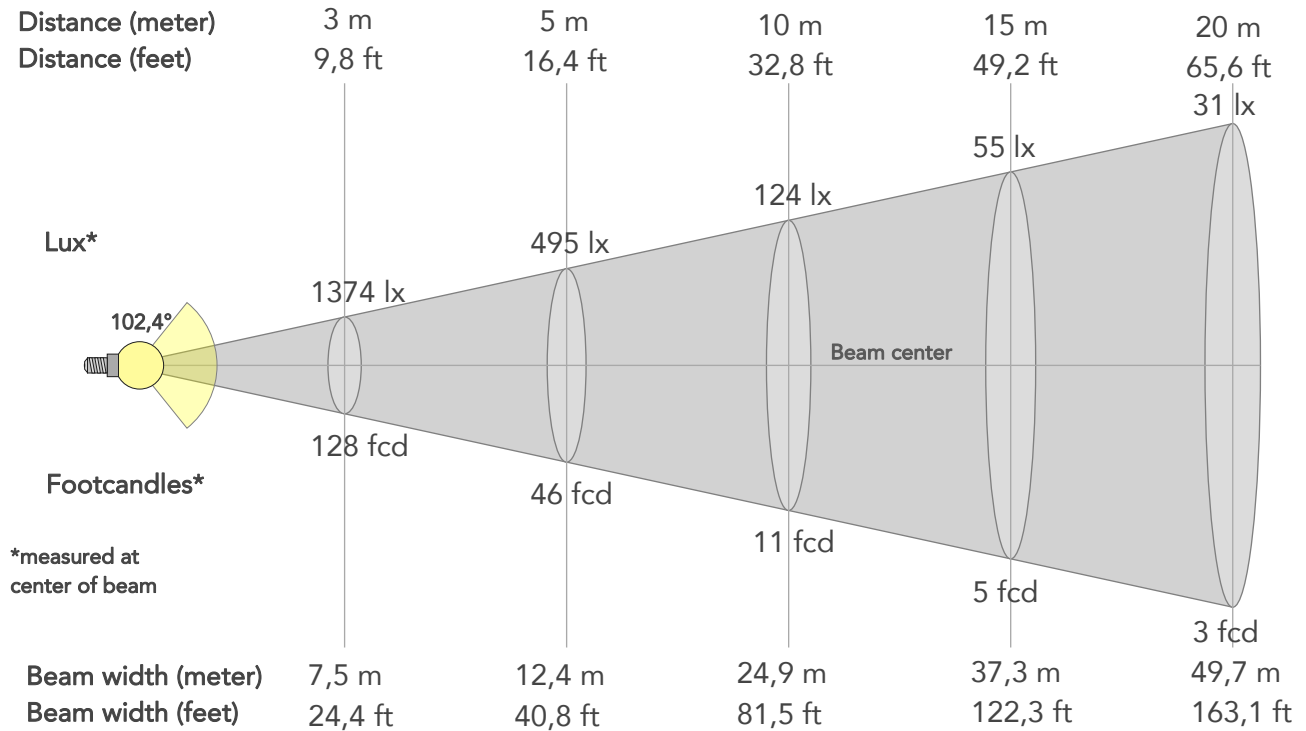

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	12370lx	3092lx	1374lx	773lx	495lx	220lx	124lx	55lx	31lx	20lx	14lx	8lx	5lx
Footcand.	1149fcd	287fcd	128fcd	72fcd	46fcd	20fcd	11fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,5m	9,9m	12,4m	18,6m	24,9m	37,3m	49,7m	62,2m	74,6m	99,5m	124,3m
Beam wid.	8,2ft	16,4ft	24,4ft	32,6ft	40,8ft	61,2ft	81,5ft	122,3ft	163,1ft	203,9ft	244,6ft	326,2ft	407,7ft


LINEAR DISTRIBUTION DIAGRAM

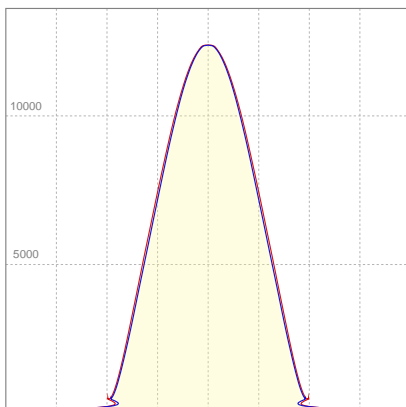

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
223V	2,05A	438,6W	75lm/W

ISO CANDELA DIAGRAM

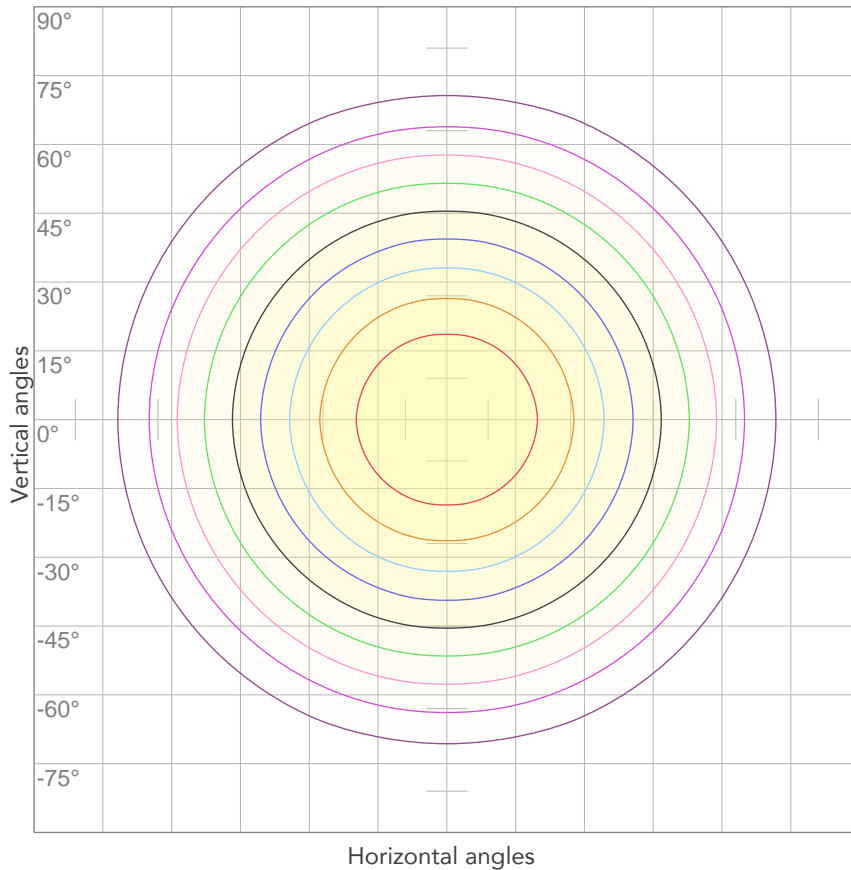


10%	1237 cd
20%	2474 cd
30%	3711 cd
40%	4948 cd
50%	6185 cd
60%	7422 cd
70%	8659 cd
80%	9896 cd

Conditions:

Number of c-planes: 4

Candela at center: 12370 cd

ISO LUX DIAGRAM

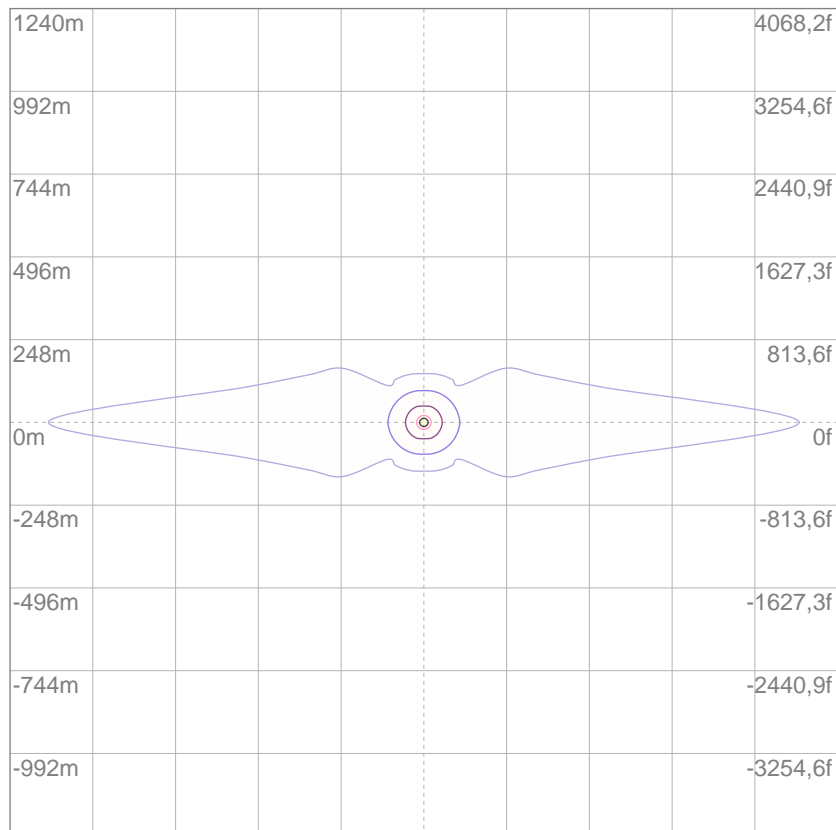

3%	3,71 lx
5%	6,18 lx
10%	12,4 lx
30%	37,1 lx
50%	61,8 lx

Conditions:

Number of c-planes: 4

Lux at center: 124 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

32474 lm

Peak candela output:

12368 cd

Light quality:

CRI: 95,4

Color temperature:

6401 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter LD

Target:


6000K

Operator:

Paolo Carvone

Date and time:

14/05/2020 18:25:13

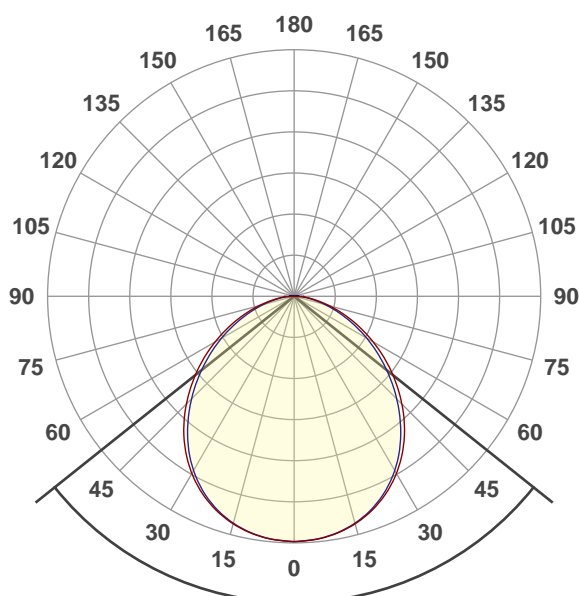




Beam angle 50%: 102,8°

Field angle 10%: 156,9°


Cut off angle 2.5%: 175,3°

Spectra

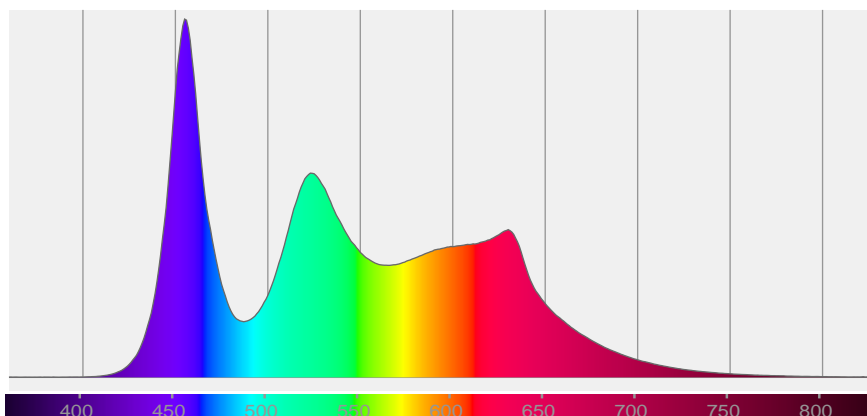


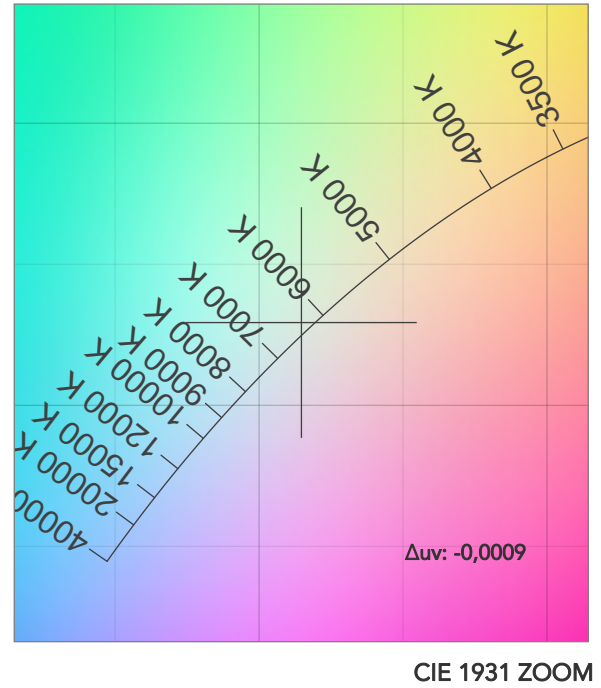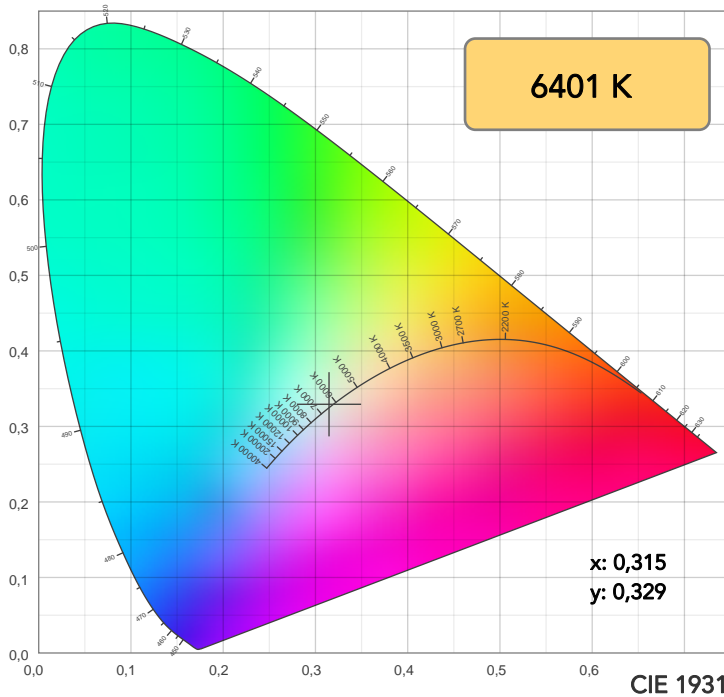

TM30: 88,9

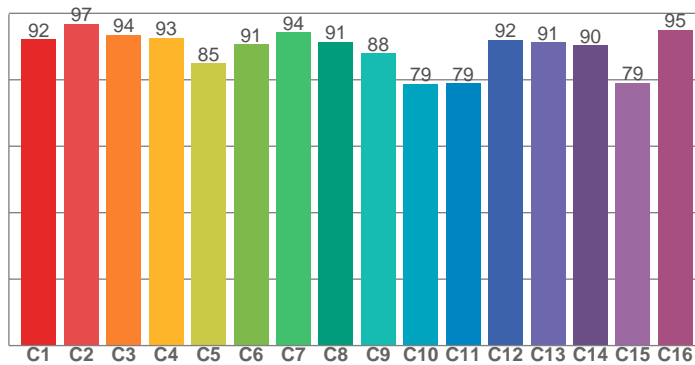

CRI: 95,4 (R1-R8)

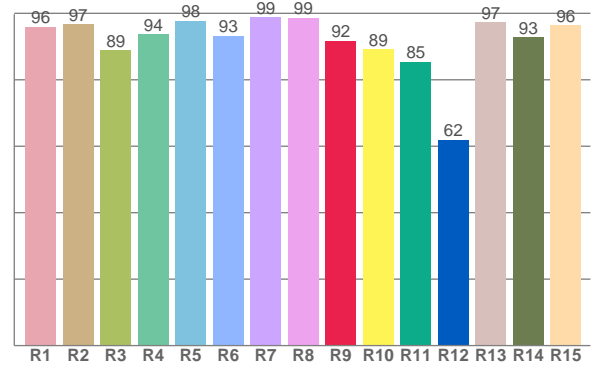

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
95,9	96,6	88,9	93,6	97,8	93,2	98,8	98,7	91,7	89,3	85,4	61,9	97,3	92,7	96,4


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
92,2	96,9	93,5	92,7	85,0	90,7	94,3	91,4	88,0	78,7	79,0	92,0	91,2	90,3	79,0	95,0

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92,9	98,9	82,9	85,5	94,0	96,8	94,9	98,7	92,7	92,8	98,3	98,3	97,4	96,5	95,7

CQS: 92,8

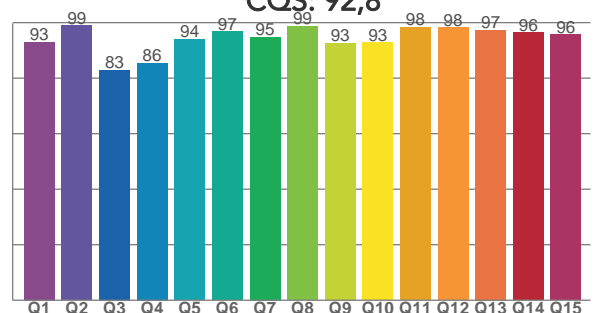

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
6401 K	95,4	91,7	88,9	102,0	92,8	93	0,315	0,329	-0,0009

TM30 DETAILS

Rf 88,9
Fidelity index Rf


Rg 102,0
Gammut index

Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	92	-1%	0%
2	97	1%	0%
3	94	0%	0%
4	93	-1%	2%
5	85	-5%	1%
6	91	1%	3%
7	94	3%	0%
8	91	-1%	3%
9	88	-3%	9%
10	79	-2%	12%
11	79	3%	11%
12	92	3%	4%
13	91	5%	0%
14	90	3%	1%
15	79	12%	-10%
16	95	1%	0%

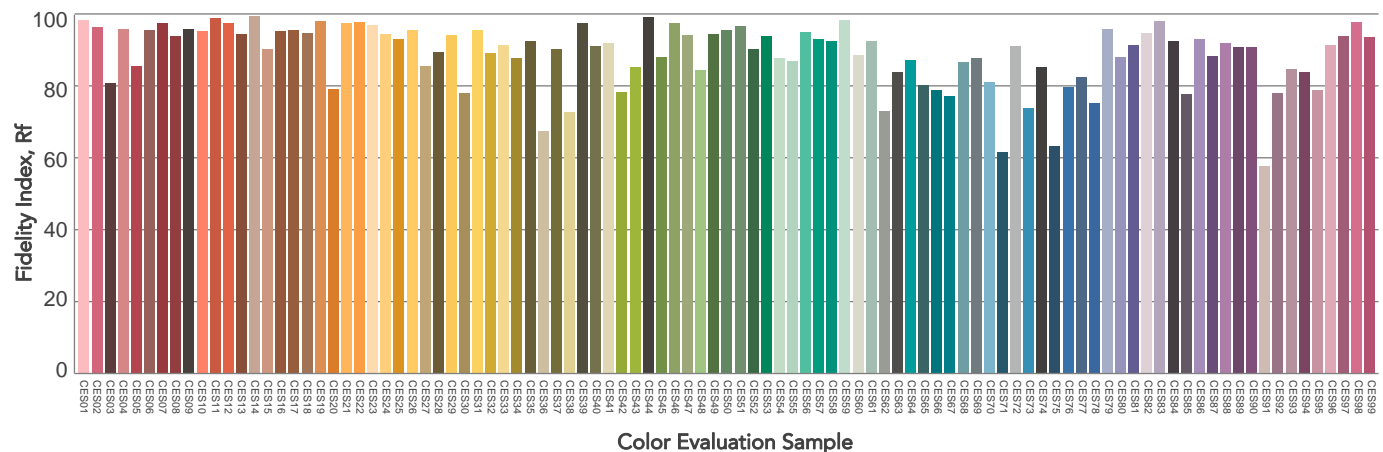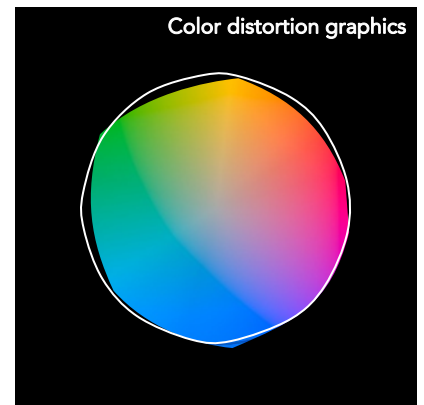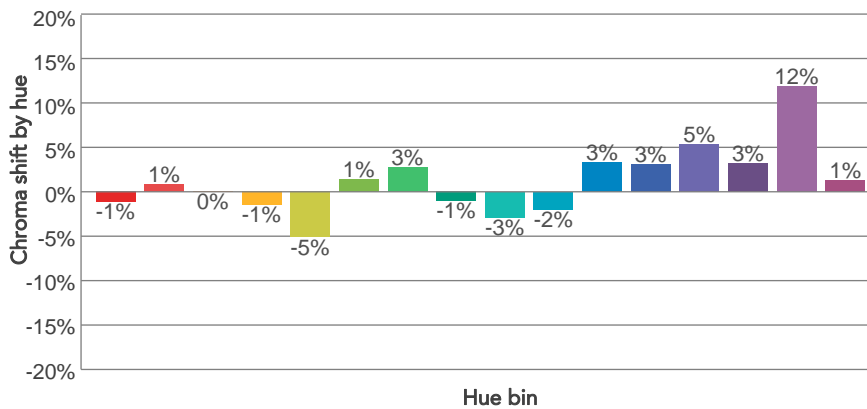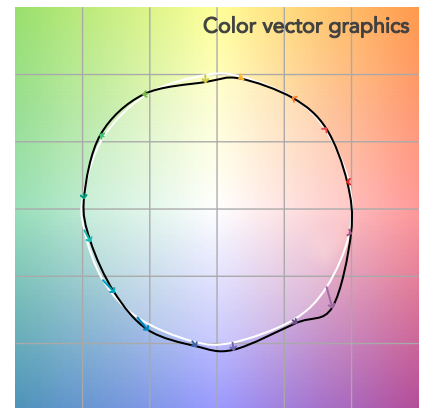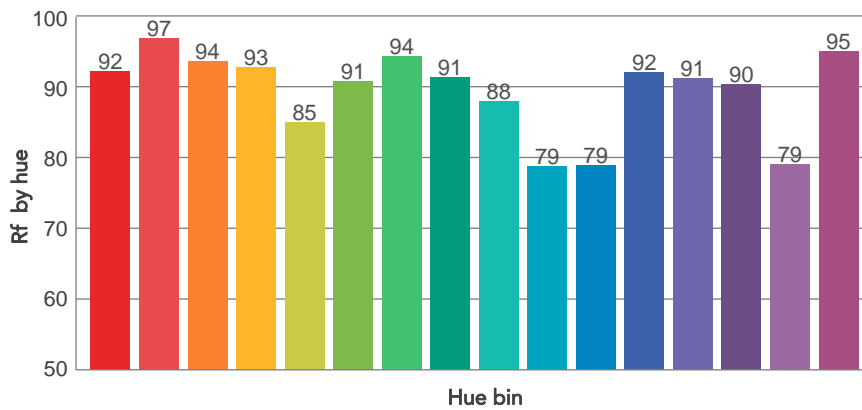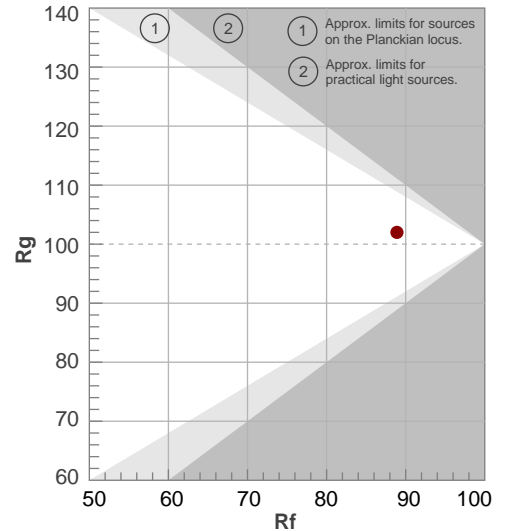

BEAM DETAILS


Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
102,8°	156,9°	175,3°	80,3%	56,7%

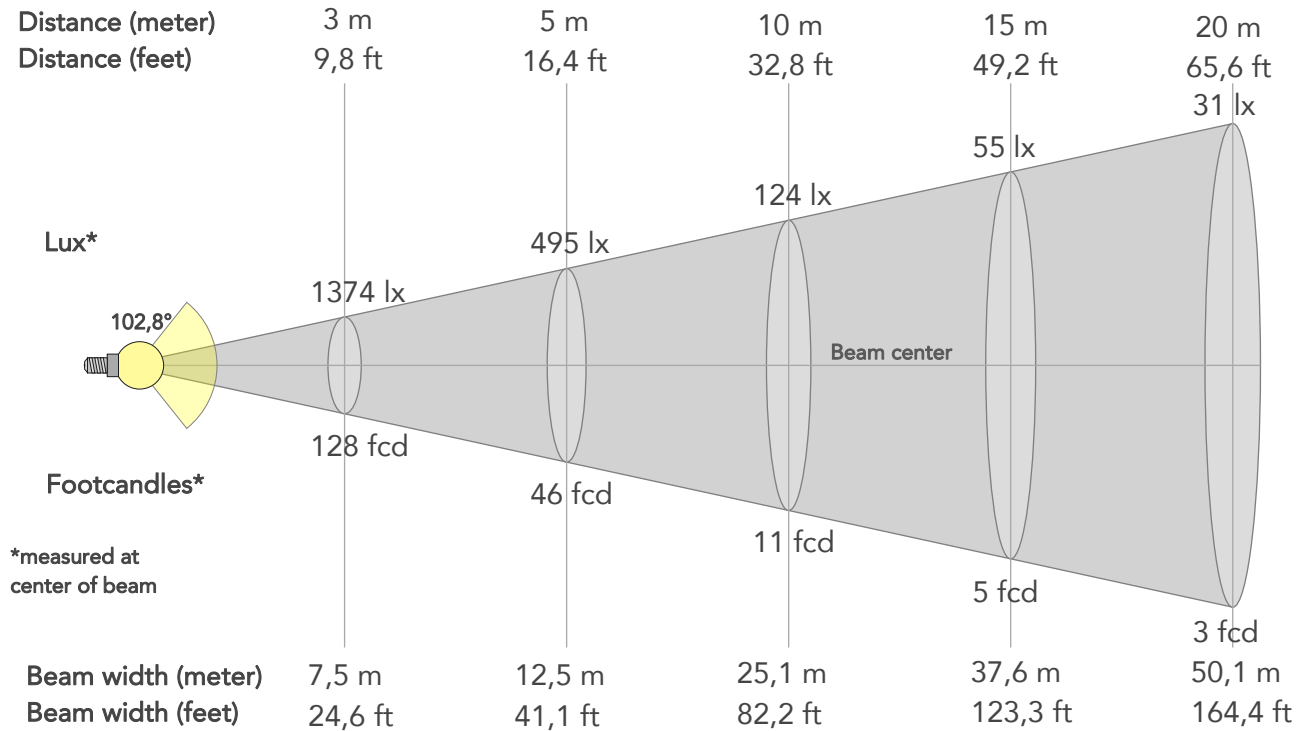

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	12366lx	3092lx	1374lx	773lx	495lx	220lx	124lx	55lx	31lx	20lx	14lx	8lx	5lx
Footcand.	1149fcd	287fcd	128fcd	72fcd	46fcd	20fcd	11fcd	5fcd	3fcd	2fcd	1fcd	1fcd	0fcd
Beam wid.	2,5m	5m	7,5m	10m	12,5m	18,8m	25,1m	37,6m	50,1m	62,7m	75,2m	100,3m	125,3m
Beam wid.	8,3ft	16,5ft	24,6ft	32,8ft	41,1ft	61,7ft	82,2ft	123,3ft	164,4ft	205,5ft	246,7ft	328,9ft	411,1ft


LINEAR DISTRIBUTION DIAGRAM

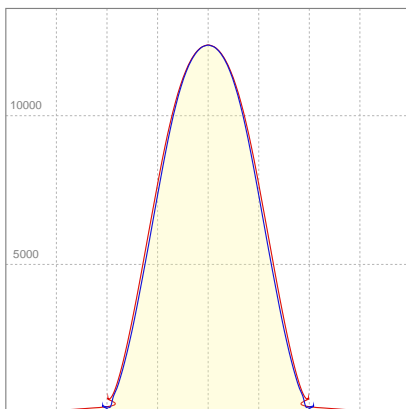

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
223V	2,06A	439,7W	74lm/W

ISO CANDELA DIAGRAM

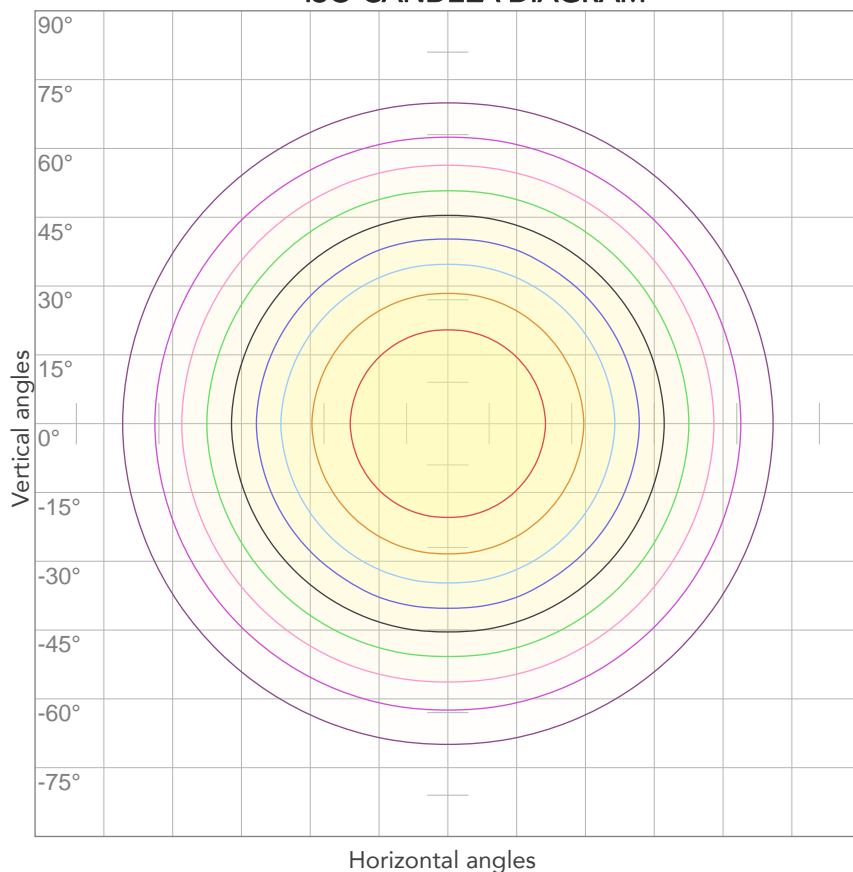


10%	1237 cd
20%	2473 cd
30%	3710 cd
40%	4947 cd
50%	6183 cd
60%	7420 cd
70%	8657 cd
80%	9893 cd

Conditions:

Number of c-planes: 4

Candela at center: 12366 cd

ISO LUX DIAGRAM

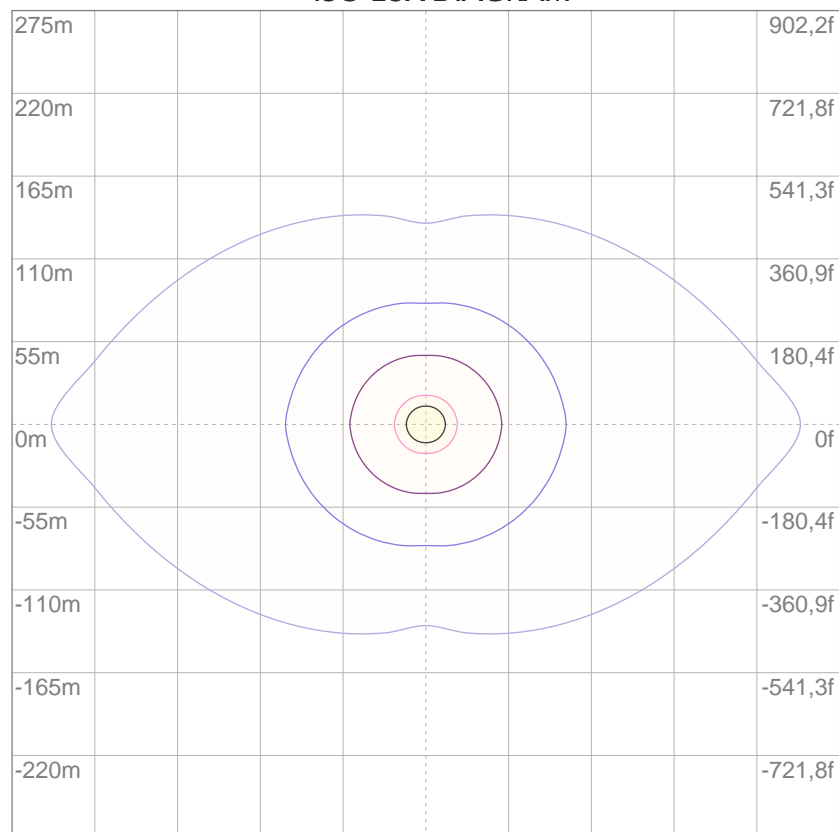

3%	3,71 lx
5%	6,18 lx
10%	12,4 lx
30%	37,1 lx
50%	61,8 lx

Conditions:

Number of c-planes: 4

Lux at center: 124 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.



Total lumen output:

28602 lm

Peak candela output:

17204 cd

Light quality:

CRI: 93,9

Color temperature:

6332 K

PRODUCT NAME:

ECLPANEL TWC

MEASURAMENT CONDITIONS:

Beam angle:

Filter Int.

Target:


6000K

Operator:

Paolo Carvone

Date and time:

14/08/2020 10:41:19

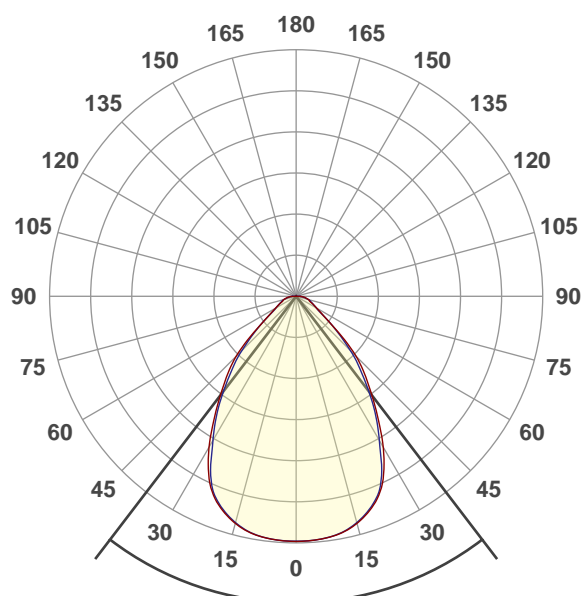




Beam angle 50%: 74,8°

Field angle 10%: 118,4°


Cut off angle 2.5%: 170,8°

Spectra

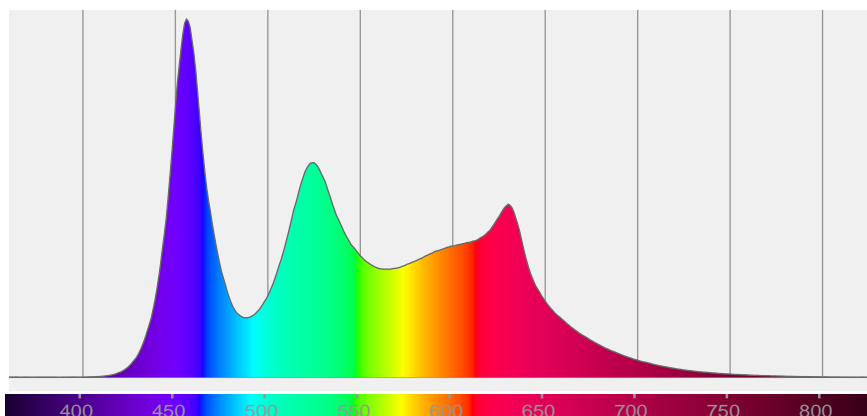


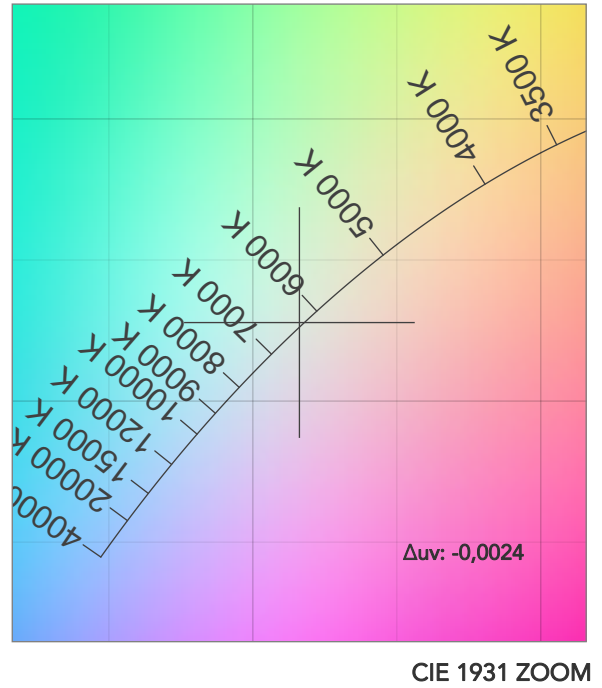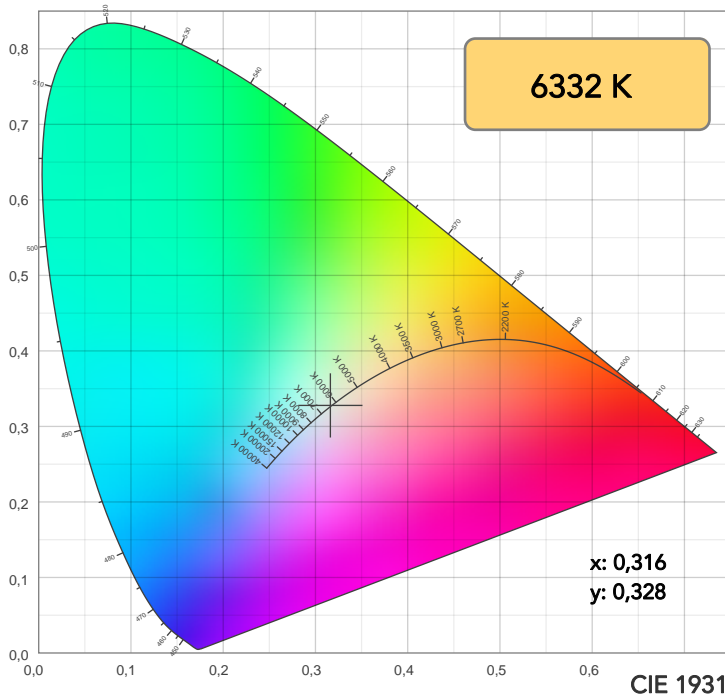

TM30: 88,7

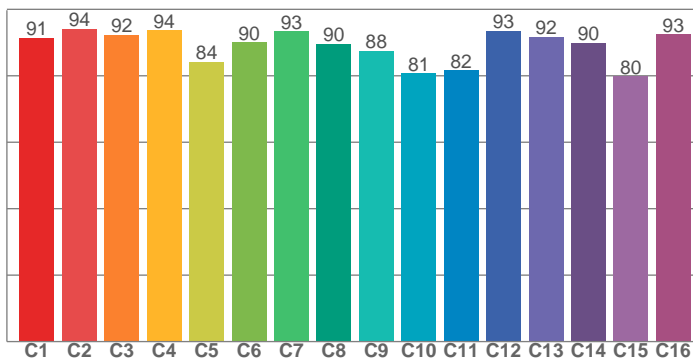

CRI: 93,9 (R1-R8)

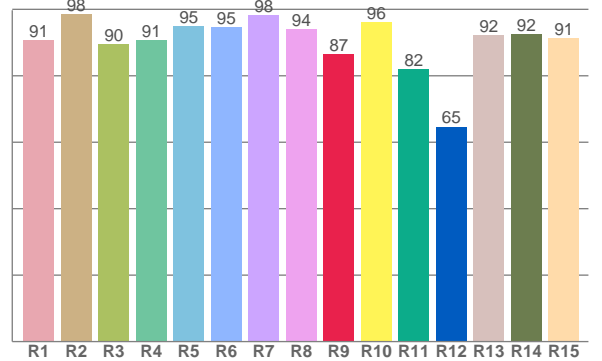

CRI R values, only R1-R8 are used to calculate final CRI value

R1	R2	R3	R4	R5	R6	R7	R8	R9	R10	R11	R12	R13	R14	R15
90,6	98,5	89,5	90,7	94,8	94,5	98,2	94,0	86,5	96,1	82,0	64,7	92,1	92,5	91,4


TM30 C values, 16 binned values out of total of 99 C values

C1	C2	C3	C4	C5	C6	C7	C8	C9	C10	C11	C12	C13	C14	C15	C16
91,4	94,1	92,4	93,7	84,2	90,0	93,4	89,6	87,5	80,8	81,7	93,5	91,8	89,9	79,8	92,5

CQS Q values

Q1	Q2	Q3	Q4	Q5	Q6	Q7	Q8	Q9	Q10	Q11	Q12	Q13	Q14	Q15
92,8	99,2	85,2	88,4	96,4	97,9	97,0	97,0	92,1	95,0	97,7	94,8	94,8	95,7	95,1

CQS: 93,5

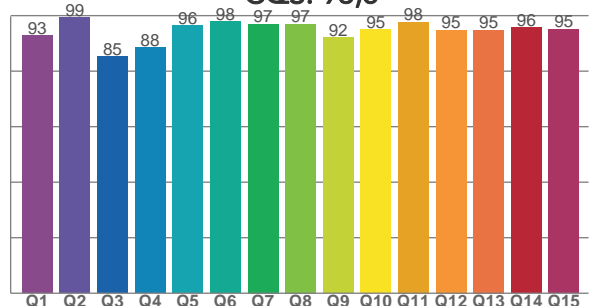

COLOR PARAMETERS







Color temperature	Color rendering index	Red component	Color fidelity	Color gamut	Color quality scale	Television lighting index	Color coordinate cie 1931	Color coordinate cie 1931	Color deviation from black body
CCT	CRI	CRI R9	TM30 Rf	TM30 Rg	CQS	TLCI	x	y	Δuv
6332 K	93,9	86,5	88,7	103,0	93,5	93	0,316	0,328	-0,0024

TM30 DETAILS

Rf 88,7
Fidelity index Rf

Rg 103,0
Gammut index


Hue Bin	R _f	Graphic shifts (%)	
		Chroma	Hue
1	91	1%	1%
2	94	3%	-1%
3	92	1%	-2%
4	94	-2%	0%
5	84	-7%	0%
6	90	1%	4%
7	93	3%	1%
8	90	0%	5%
9	88	-1%	9%
10	81	-1%	11%
11	82	4%	10%
12	93	3%	2%
13	92	4%	0%
14	90	2%	3%
15	80	12%	-7%
16	93	2%	2%

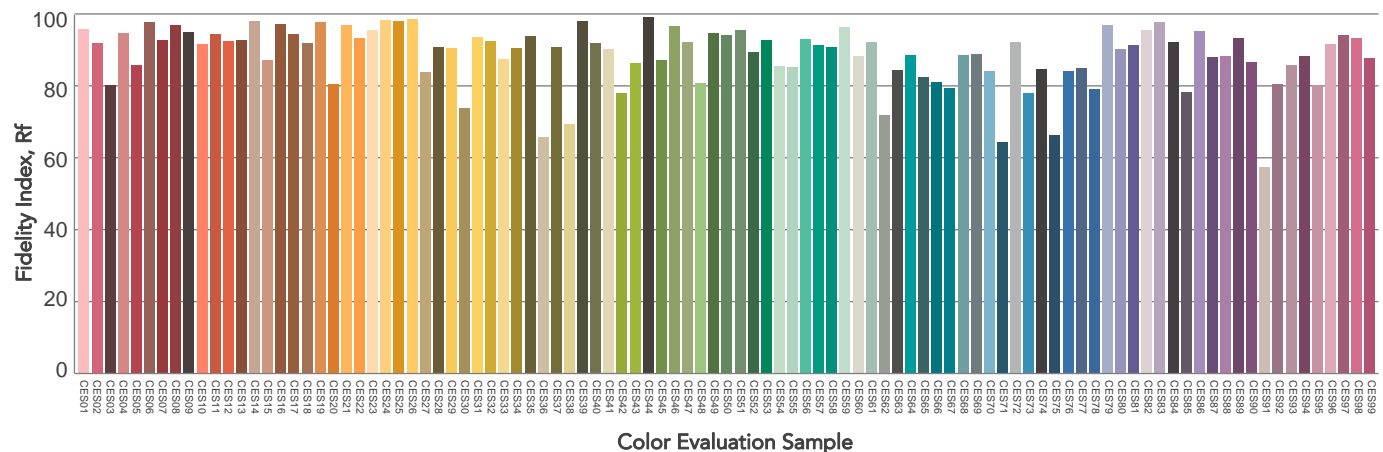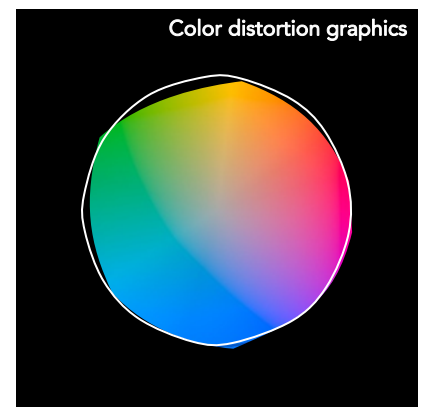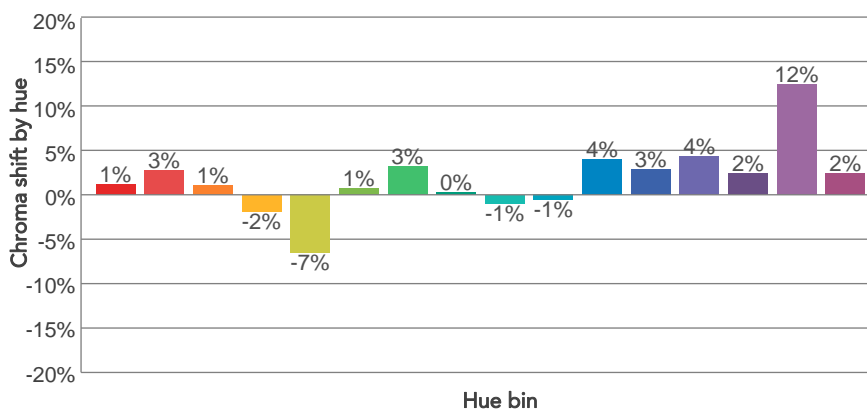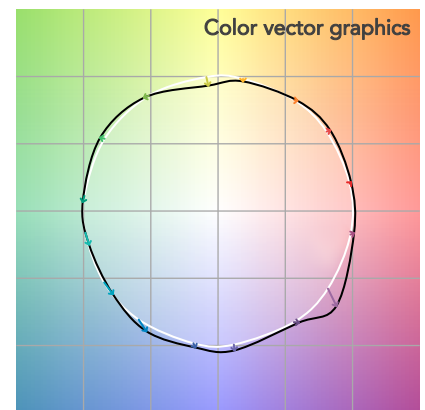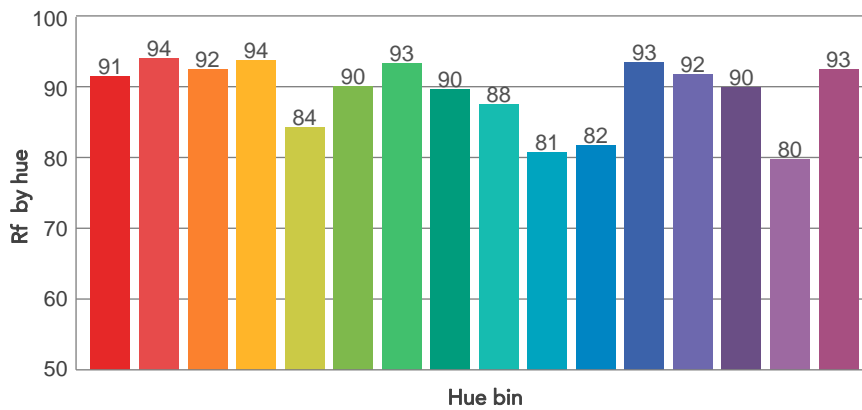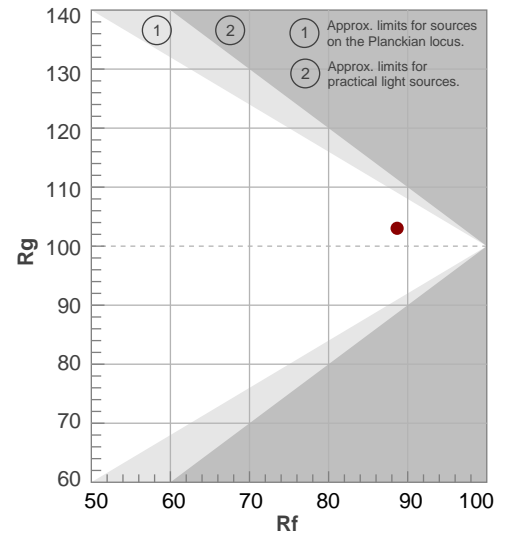

BEAM DETAILS




Beam angle 50%	Field angle 10%	Cut off angle 2,5%	Intensity ratio in 120° cone	Intensity ratio in 90° cone
74,8°	118,4°	170,8°	88,1%	74,1%

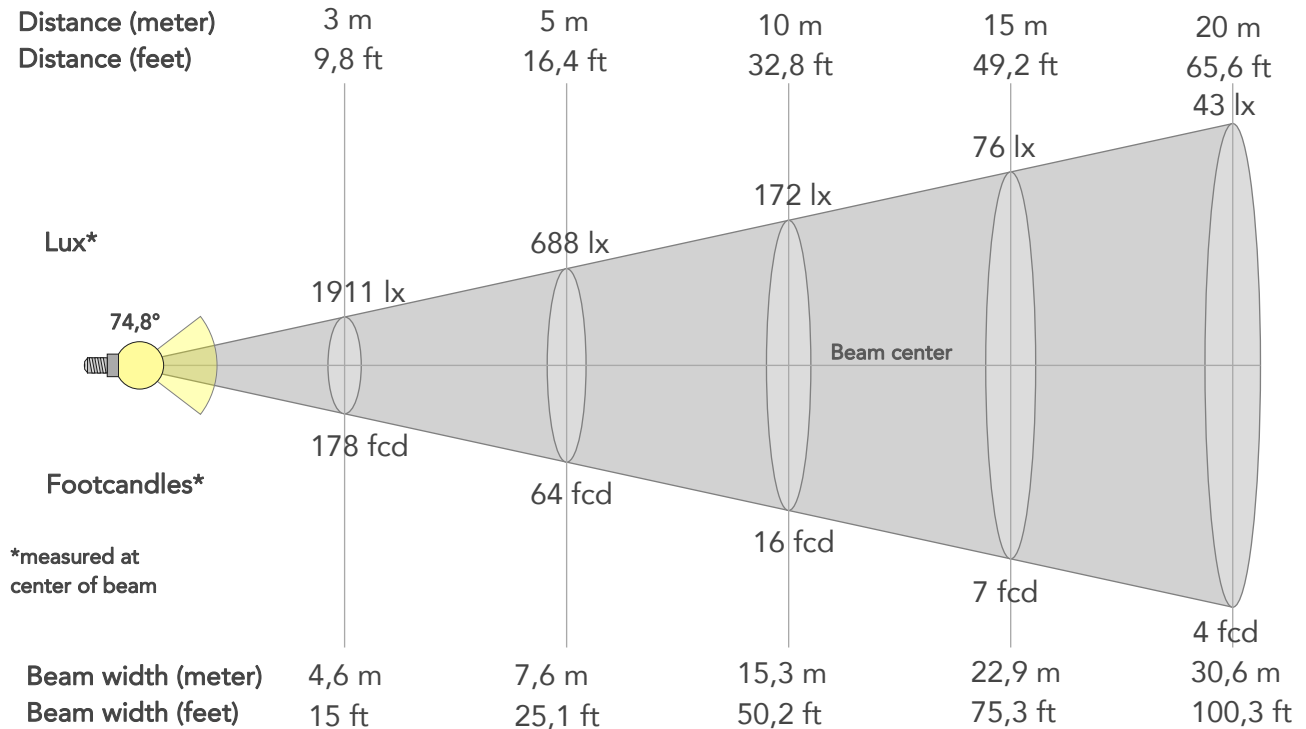

BEAM INTENSITIES AND WIDTHS

Distance	1m	2m	3m	4m	5m	7,5m	10m	15m	20m	25m	30m	40m	50m
Distance	3,3ft	6,6ft	9,8ft	13,1ft	16,4ft	24,6ft	32,8ft	49,2ft	65,6ft	82ft	98,4ft	131,2ft	164ft
Lux	17196lx	4299lx	1911lx	1075lx	688lx	306lx	172lx	76lx	43lx	28lx	19lx	11lx	7lx
Footcand.	1598fcd	399fcd	178fcd	100fcd	64fcd	28fcd	16fcd	7fcd	4fcd	3fcd	2fcd	1fcd	1fcd
Beam wid.	1,5m	3,1m	4,6m	6,1m	7,6m	11,5m	15,3m	22,9m	30,6m	38,2m	45,9m	61,2m	76,5m
Beam wid.	5ft	10,1ft	15ft	20ft	25,1ft	37,6ft	50,2ft	75,3ft	100,3ft	125,4ft	150,5ft	200,7ft	250,9ft


LINEAR DISTRIBUTION DIAGRAM

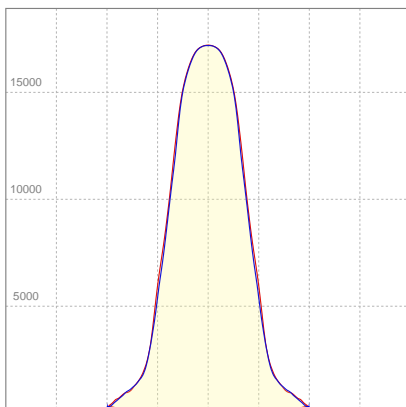

ELECTRICAL SPECIFICATIONS

Input voltage	Input current	Input power	Effeciency
226V	2,04A	444,5W	64lm/W

ISO CANDELA DIAGRAM

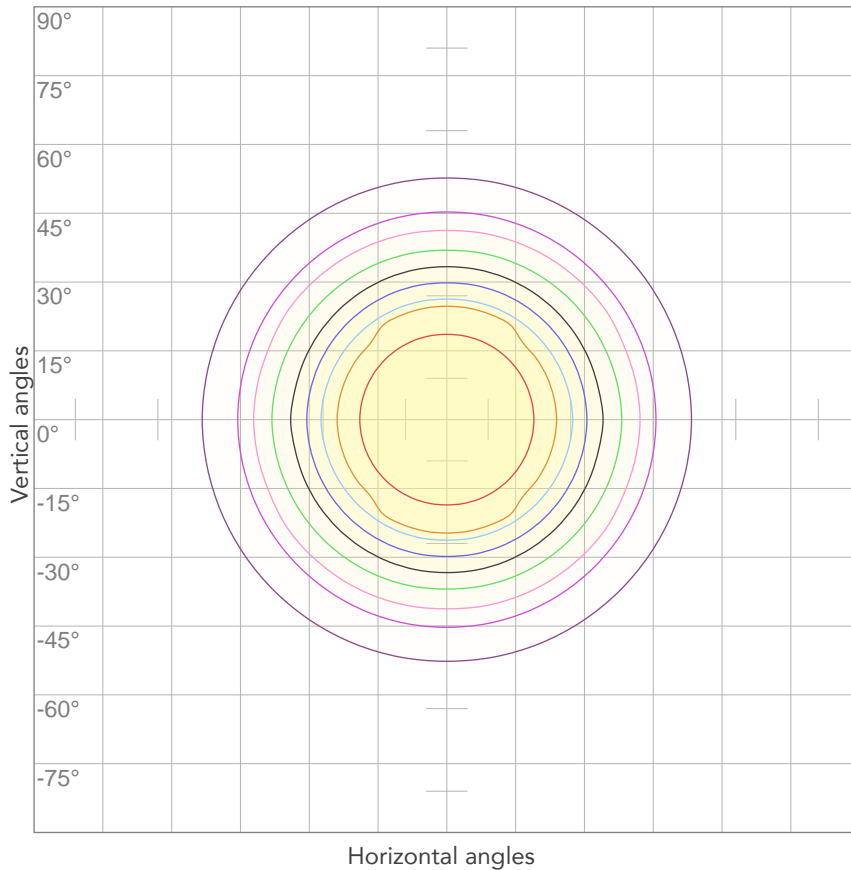


10%	1720 cd
20%	3439 cd
30%	5159 cd
40%	6878 cd
50%	8598 cd
60%	10318 cd
70%	12037 cd
80%	13757 cd

Conditions:

Number of c-planes: 4

Candela at center: 17196 cd

ISO LUX DIAGRAM

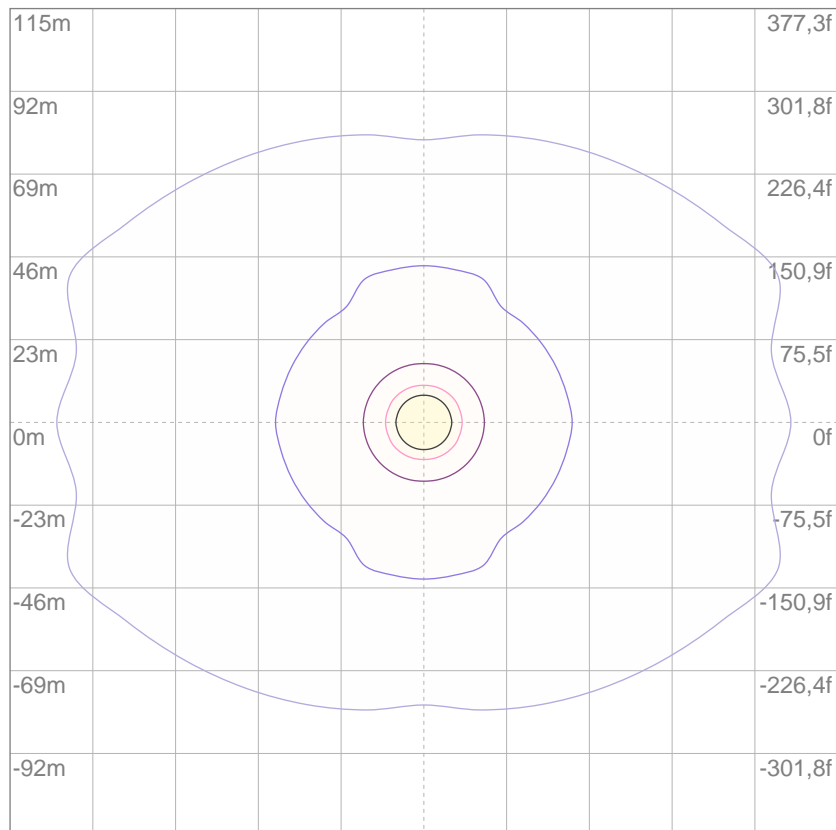

3%	5,16 lx
5%	8,60 lx
10%	17,2 lx
30%	51,6 lx
50%	86,0 lx

Conditions:

Number of c-planes: 4

Lux at center: 172 lx

Lux distribution on a surface when lamp is mounted at 10 meters from the surface.