

LiveX 10A

Bi-amp loudspeaker, D+AB-cl. 400W 2-way (10" LF+1" HF), ABS box, 123dB SPL
ORDER CODE: **LIVEX10A**



Active loudspeakers, D+AB class bi-amp, 2-way 350 W+50 W, 123db SPL

MAIN FEATURES

- Low frequency: 10" woofer/2.6"v.c.
- High frequency: 1" driver/1.3"v.c.
- Frequency response: 65-20000 Hz (± 3 dB)
- User controls: mic, line, master, eq LF-HF
- Reproduction of voice and music for live and recorded performances
- Cabinet material: polypropylene, can also be used as a stage monitor
- For sound installations in environments requiring dynamics and sound pressure

TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: active 2 way

COMPONENTS

- Low frequency: 10" woofer/2.6"v.c.
- High frequency: 1" driver/1.3"v.c.

FEATURES

- Built-in amp LF/HF: 350+50W /4/8Ohm
- SPL max: 123dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- SPL cont/peak: 117/123dB @1m (free field)
- Frequency response: 65-20000Hz (± 3 dB)
- Coverage angle HxV: 80x60°
- Cross over frequency: 1500Hz

ELECTRONICS

- Amplifier: digital + AB class
- Power: 350+50W /4/8Ohm
- Input sensitivity: 4 dBu (1,228Vrms) adjustable
- Protection: limiter temp.
- User controls: mic, line
- Built-in DSP: 54bit - sampling rate 48kHz
- Operating voltage/frequency: 220 V~240 V/50 Hz

INPUT/OUTPUT CONNECTORS

- Input signal: XLR IN/OUT, jack 6.35 mm
- Power connection: type power-con


CABINET CONSTRUCTION

- Cabinet material: 4mm polypropylene
- Suspension system: eyebolt, 35 mm pole mount
- Angle: 60° monitor applications
- Handles: 1 on side

PHYSICAL

- Dimensions (WxHxD): 330x557x313 mm
- Weight: 15.5 kg

TECHICAL DRAWINGS

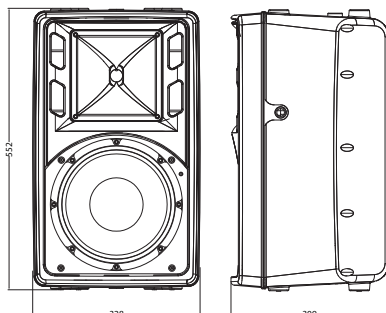

For more product
info and downloads
visit our website

