

Touring 12MA

Active cx monitor, D-cl. 700 +DSP, 2-way (12"LFNd+1.4" HF Nd),130dB SPL



Active stage-monitor, coaxial design, D-class amplifier, 2-way 700 W,127db SPL

MAIN FEATURES

- Low frequency: 12" neodymium woofer / 3"v.c.
- High frequency: 1.4" neodymium driver / 3"v.c.
- Frequency response: 75-18000 Hz (± 3 dB)
- Excellent clarity in the monitoring of voice and music for live and recorded performances
- Installed into theatres and congress halls owing to excellent acoustic performance
- Birch plywood enclosure
- DSP with 4 presets (flat eq-cut 80 Hz-cut 60 Hz-punch eq) for selection of optimal frequency response

TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: active stage monitor, coaxial design

COMPONENTS

- Low frequency: 12" neodymium woofer / 3" v.c.
- High frequency: 1.4" neodymium driver / 3" v.c.

FEATURES

- Built-in amp: 700 W

ACOUSTICAL SPECIFICATIONS

- SPL cont/peak: 121/127 dB @1m (free field)
- Frequency response: 75-18000 Hz (± 3 dB)
- Coverage angle HxV: 60x40 °
- Cross over frequency: 1400 Hz

ELECTRONICS SPECIFICATIONS

- Amplifier: digital
- Input sensitivity: 4 dBu (1,228Vrms) adjustable
- Protection: RMS limiter, fast limiter, temp.
- User controls: flat eq-cut 80Hz-cut 60Hz-punch eq
- Processor: DSP
- Operating voltage/frequency: 220 V $\pm 10\%$, 50 Hz

INPUT/OUTPUT CONNECTORS

- Input signal: XLR IN/OUT
- Power connection: VDE IN

CABINET CONSTRUCTION

- Cabinet material: 18 mm birchplywood
- Suspension system: eyebolt, fly track, 35 mm pole mount
- Angle: 50 ° monitor applications
- Handles: 2 on side


PHYSICAL

- Dimensions (WxHxD): 430x410x558 mm
- Weight: 18 kg

ACCESSORIES & RELATED PRODUCTS

- BAGTOURING12M Fabric protection for DAD TOURING12MA/TOURING12MP

TECHICAL DRAWINGS

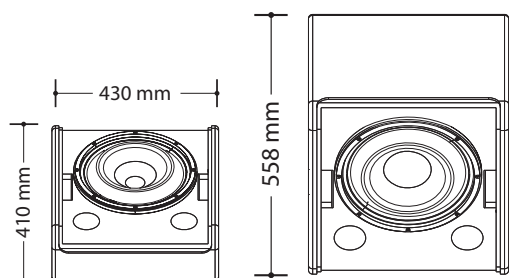

Visit our website
for specifications and
tech documentations

