

Touring 15AG2

Active loudspeaker, D-cl. 700W +DSP, 2-way (15"Nd LF+2" HF), 129dB SPL



Active loudspeaker, D-class amplifier, 2-way 700 W, 129dB SPL

MAIN FEATURES

- Low frequency: 15" neodymium woofer/3"v.c.
- High frequency: 2" driver/3"v.c.
- Frequency response: 45-18000 Hz (± 3 dB)
- Excellent clarity in the reproduction of voice and music for live and recorded performances
- Installed into theatres and congress halls owing to excellent acoustic performance
- Birch plywood enclosure, designed for stage-monitor application
- DSP with 4 presets (full range-HPF-coupling-monitor) for selection of optimal frequency response

TECHNICAL SPECIFICATION

LOUDSPEAKER

- System type: active 2 way

COMPONENTS

- Low frequency: 15" neodymium woofer / 3" v.c.
- High frequency: 2" driver/3"v.c.

FEATURES

- Built-in amp: 700 W
- SPL max: 129 dB @1m (free field)

ACOUSTICAL SPECIFICATIONS

- SPL cont/peak: 123/129 dB @1m (free field)
- Frequency response: 45-18000 Hz (± 3 dB)
- Coverage angle HxV: 90x60 °
- Cross over frequency: 900 Hz

ELECTRONICS SPECIFICATIONS

- Amplifier: digital
- Input sensitivity: 4 dBu (1,228Vrms) adjustable
- Protection: RMS limiter, fast limiter, temp.
- User controls: full range-HPF-coupling-monitor
- Processor: DSP
- Operating voltage/frequency: 220 V $\pm 10\%$, 50 Hz

INPUT/OUTPUT CONNECTORS

- Input signal: XLR IN/OUT
- Power connection: VDE IN

CABINET CONSTRUCTION

- Cabinet material: 18 mm birchplywood
- Suspension system: eyebolt, fly track, 35 mm pole mount
- Angle: 45-30 ° monitor applications
- Handles: 4 on side


PHYSICAL

- Dimensions (WxHxD): 430x755x405 mm
- Weight: 34 kg

ACCESSORIES & RELATED PRODUCTS

- BAGTOURING15 Fabric protection for DAD TOURING15AG2/TOURING15P

TECHICAL DRAWINGS

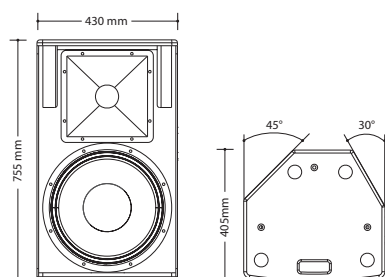

Visit our website
for specifications and
tech documentations

