

EclDisplay CASVW

35W Variable White LED gallery light from 2700K to 5600K with CASAMBI control on-board



EclDisplay is a range of revolutionary and flexible LED spotlights designed for galleries, retail and any public venue where an advanced but classical looking fixture is needed, with several control options, sources and optic versions available to precisely meet any application. The **EclDisplay CAS VW** is the version of the **EclDisplay** range made with integrated CASAMBI control on-board, leaving to System Integrators to install this luminaire in venues with their own wiring distribution and control. **EclDisplay CAS VW** includes a high-efficiency 35W Warm White + Cold White (Variable White - VW) LED capable of delivering a full tuneable White from 2700K to 5600K, and it is completed with a wide selection of optional profile (zoom and static) or wash lenses, and other optical accessories like louvres and snoots, making it a truly a multi-purpose fixture.

MAIN FEATURES

- CASAMBI control on-board
- 35W Variable White LED capable to deliver a full Tunable White from 2700K to 5600K
- Multiple lens options: profile (zoom and static) or wash optics

VERSIONS

Code	Housing
ECLDISPLAYCASVWB	Black
ECLDISPLAYCASVWW	White

TECHNICAL SPECIFICATION

LIGHT SOURCE

- Source: 35 W Tunable White LED
- CCT: 2700K to 5600K
- Luminous flux: 2700K: (profile - 8°) 461 lm - (profile - 18° HD) 525 lm - (profile - 36° HD) 582 lm - (profile - 50° HD) 573 lm - (profile - 10°-20°) 838 lm @20° - (profile - 20°-40°) 833 lm @40° - (wash 25°-50°) 866 lm @50° - (wash 15°-30°) 802 lm @30°
- Luminous flux: 5600K: (profile - 8°) 641 lm - (profile - 18° HD) 1'180 lm - (profile - 36° HD) 1'242 lm - (profile - 50° HD) 1'225 lm - (profile - 10°-20°) 1'168 lm @20° - (profile - 20°-40°) 1'153 lm @40° - (wash 25°-50°) 1'183 lm @50° - (wash 15°-30°) 1'122 lm @30°
- Lux: 2700K: (profile - 8°) 1'334 lx - (profile - 18° HD) 338 lx - (profile - 36° HD) 110 lx - (profile - 50° HD) 48 lx - (profile - 10°-20°) 1'344 lx @10°; 426 lx @20° - (profile - 20°-40°) 347 lx @20°; 91 lx @40° - (wash 25°-50°) 134 lx @25°; 49 lx @50° lx @5 m
- Lux: 5600K: (profile - 8°) 1'807 lx - (profile - 18° HD) 738 lx - (profile - 36° HD) 232 lx - (profile - 50° HD) 100 lx - (profile - 10°-20°) 1'765 lx @10°; 529 lx @20° - (profile - 20°-40°) 587 lx @20°; 128 lx @40° - (wash 25°-50°) 186 lx @25°; 69 lx @50° lx @5 m
- CRI: 2700K: >96; 5600K: >96
- R9: 2700K: >87; 5600K: >90
- TLCI: 2700K: >96; 5600K: >97
- TM30 Rf: 2700K: >96; 5600K: >92
- TM30 Rg: 2700K: <101; 5600K: <99
- Source life expectancy: > 50.000 hrs (L70B10 @Ta 25° C / 77° F)

OPTICS

- Zoom: (wash lens - optional) 15° ~ 30° or 25° ~ 50° - (profile lens - optional) 10° ~ 20° or 20° ~ 40° or fix 8°, 18°, 36°, 50°
- Other: 360° lens rotation - shutter blades lockable - optional 360° rotating barndoors and gel frame holder
- Other: (profile lens) shutter blades lockable
- Other: (profile lens - optional) manual rotating gobo holder size E, outer: 37 mm - image: 23 mm - thickness: max 3 mm

COLOUR SYSTEM

- Colour mixing: warm white + cold white - tunable white
- CCT: linear CCT control

DYNAMIC EFFECTS

- Static mode: selection of static dimmer and color temperature

BODY

- Hardware on-board: lockable tilt with screw
- Body: aluminium die-casting
- Body colour: RAL 9004 or RAL 9010
- Other: included 1 meter power cable - Cable diameter range: 6 - 10 mm

CONTROL

- Protocols: CASAMBI control on-board

ELECTRONICS

- Dimmer: linear 0 ~ 100% electronic dimmer

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 30 W
- Power factor: > 0,96
- Inrush current: 26.4A / 224 us

PHYSICAL

- Operating Temperature: -10° ~ +45°
- IP rating: 20
- Cooling: passive cooling and fan-free
- Suspension and fixing: track / hanging / ceiling installation
- Data connection: bluetooth
- Power connection: bare-end cable
- Dimensions (WxHxD): 148x200x115.5 mm
- Weight: 1,63 kg

CERTIFICATIONS / APPROVALS


- Certifications / Approvals: CE, RCM

ACCESSORIES & RELATED PRODUCTS


▪ ECLDISPPRL08B/W	Fix Profile 8° Lens, with 4 framing shutters, for EclDisplay, black/white housing	▪ ECLDISPPHDZL2040BW	20° - 40° Zoomable High definition profile lenses for Ecl Display series
▪ EDISPDRVCCAS1C	Additional optional driver for A ECLDISPLAYCC, casambi version 1 color	▪ ECLDISPCEILKIT	Ceiling adapter kit for EclDisplay (without flange)
▪ ECLDISPPRHDL18B/W	18° High definition profile lenses for Ecl Display series, black/white housing	▪ ECLDISPHSNOOTB/W	Half Snoot for EclDisplay, black/white housing
▪ ECLDISPPRHDL36B/W	36° High definition profile lenses for Ecl Display series, black/white housing	▪ ECLDISPFSNOOTB/W	Full Snoot for EclDisplay, black/white housing
▪ ECLDISPPRHDL50B/W	50° High definition profile lenses for Ecl Display series, black/white housing	▪ ECLDISPLOUVREB/W	Anti-glare louvre for EclDisplay, black/white housing
▪ ECLDISPWASHL1530B/W	Zoomable Wash Lens 15-30° for EclDisplay, black/white housing	▪ ECLDISPBDNFFB/W	Barndoor and filter frame (compatible with Wash Lenses) for EclDisplay with manual index gear on board, black/white housing
▪ ECLDISPWASHL2550B/W	Zoomable Wash Lens 25-50° for EclDisplay, black/white housing	▪ ECLDISPGOBOHINDB/W	Gobo holder for EclDisplay with manual index gear on board, black/white housing
▪ ECLDISPPRZL1020B/W	Zoomable Profile Lens 10-20°, with 4 framing shutters, for EclDisplay, black/white housing	▪ ECLDISPCEILFLGB/W	Black flange to complete the EclDisplay ceiling adapter kit, black/white housing
▪ ECLDISPPRZL2040B/W	Zoomable Profile Lens 20-40°, with 4 framing shutters, for EclDisplay, black/white housing	▪ PLCPD7501P68D	Power & DMX 120 Ohm
		▪ C6002B	Slim aluminum clamp, 200kg loading, 48-51mm tubes, M10 bolt, Black
		▪ RSR0630B	Steel security cable for hanging bodies, inox steel shackle, L=60 cm,

PRESET 5.600K

Beam angle 50%: 8°

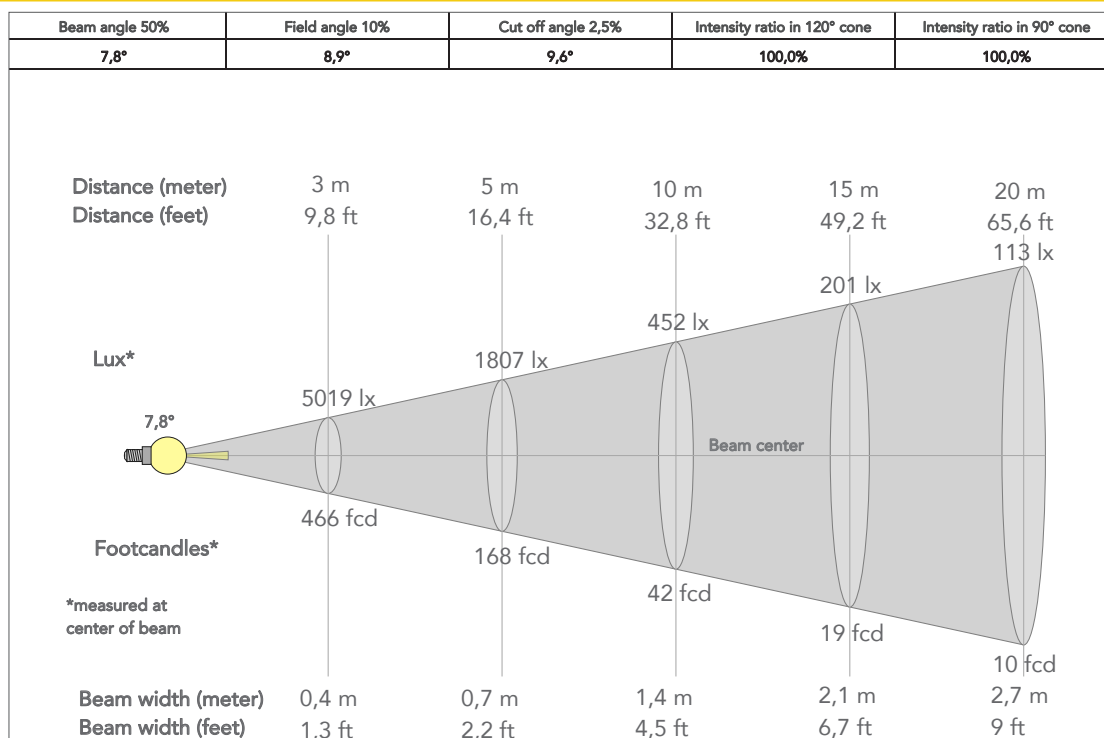

TECHICAL DRAWINGS

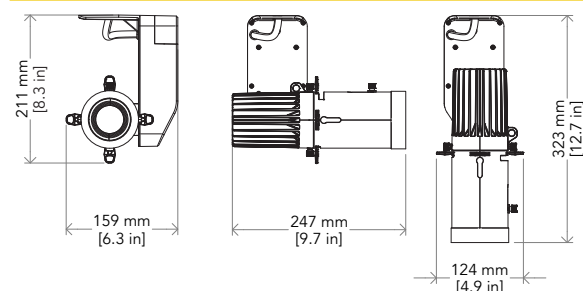

CERTIFICATIONS / APPROVALS



Conforms to UL STD. 1573
Certified to CSA STD: C22.2 NO. 166

Visit our website
for specifications and
tech documentations

