


CRMXBOXIP67

IP67 1 Universe CRMX Wireless Transceiver for exterior installation

ORDER CODE: **CRMXBOXIP67**

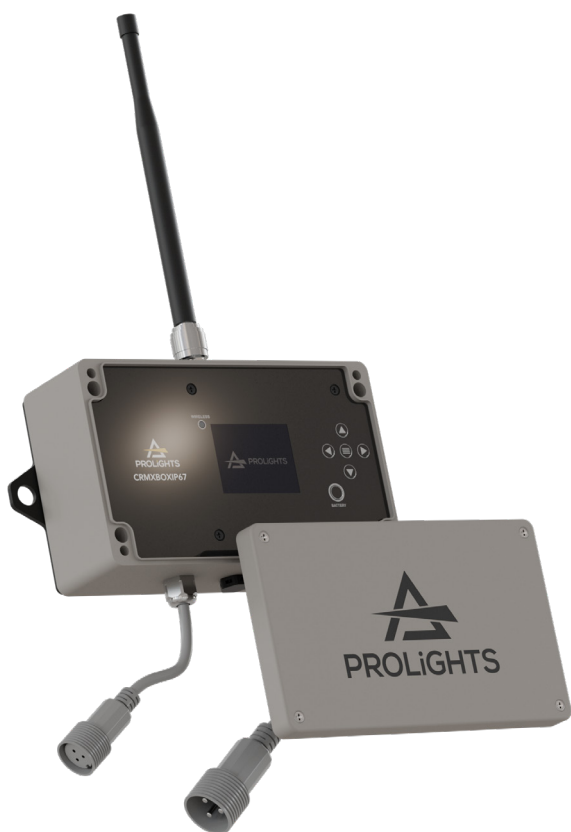

The **CRMXBOXIP67** is an outdoor transceiver designed for permanent exterior installations. Capable of functioning as either a transmitter or receiver, it handles one DMX universe, accommodating up to 512 channels.

The unit's compact form factor includes IP-rated screwed connectors for reliable power and signal connections. Its robust construction, featuring an IP67-rated enclosure and a vandal-resistant mounting cover, ensures durability against outdoor elements.

The device is user-friendly, equipped with an onboard display and buttons for straightforward setup. It is compatible with Lumen Radio CRMX and Wireless DMX G protocols, offering versatile integration options.

MAIN FEATURES

- IP67 Single Univers Wireless CRMX Transceiver unit
- Power IN and DMX In/Out through IP screwed connectors
- Either LumenRadio CRMX and Wireless DMX G transmission option

TECHNICAL SPECIFICATION

CONTROL

- Protocols: DMX512, RDM, CRMX
- DMX channels: 512 channel
- Wireless Control: included, LumenRadio Timo Fx DMX/RDM compatible with both CRMX (Lumen Radio) and W-DMX (Wireless DMX)
- RDM: RDM for remote monitoring and settings
- Display: Graphic User Interface
- Firmware upgrade: yes, via USB - DMX interface (UPBOXPRO) not included

ELECTRONICS

- Display battery: self-charging battery backup
- Operating temperature: -20° C / +45° C (-4° F / +113° F)

ELECTRICAL

- Mains power supply: 100-240V - 50/60Hz
- Max power consumption: 6 W


PHYSICAL

- IP rating: 67
- Suspension and fixing: side holes for fixing to surfaces
- Signal connection: moulded IP signal IN (OUT) connector
- Power connection: moulded IP power IN connector
- Dimensions (WxHxD): 238x120x84 mm
- Weight: 1,65 kg

CERTIFICATIONS / APPROVALS

- Certifications / Approvals: CE

TECHICAL DRAWINGS

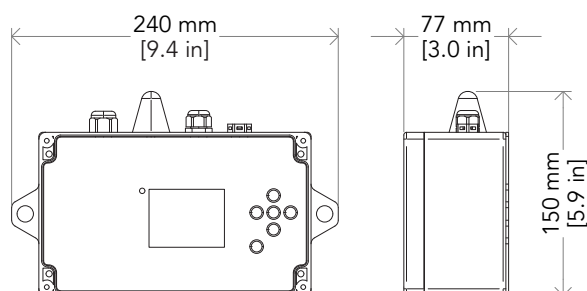

CERTIFICATIONS / APPROVALS

Visit our website
for specifications and
tech documentations

