

MX04USB

4 in - 2 out audio mixer. MP3 player, Bluetooth. Headphone output

PROAUDIO®



MX04USB is a versatile mixer with 4 inputs and 2 outputs. It's equipped with player that accepts FLAC WMA APE MP3 formats - with display and Bluetooth connection.

It's provided with low-noise quality preamps, an effective 3-band equalizer and phantom power.

Two channels can be adjusted independently and another 2 can be used as stereo channels.

The master section of the mixer has 1 effect loop, balanced 6.35 mm jack outputs, monitor outputs, as well as a headphone connection. **MX04USB** is also equipped with RCA connectors for recording devices.

MAIN FEATURES

- Channels: 4 input - 2 output
- Media player: MP3 FLAC WMA APE player - Bluetooth
- Effects: Reverb
- Phantom power: 48 V
- Phone output: 350 mW
- 60 mm fader

TECHNICAL SPECIFICATION

MIXER

- Channels: 4 input - 2 output
- Mic input: Balanced
- Gain range: +6 dB /+ 60dBdB
- SN/R: 120dB
- Line input: Balanced
- Gain range: -14 /+ 40dB
- SN/R: 95dB
- Stereo Channels: Balanced, Ch 3-4
- Gain range: -20 /+10dB

AUDIO SOURCE

- Type: MP3 FLAC WMA APE player - Bluetooth

AUDIO SPECIFICATIONS

- Frequency response: 20 to 25.000 Hz +-1dBHz
- Output level/impedance: +26 dBu bal./+22 dBu unbal./600 Ohm
- Tape out: +22 dBu unbalanced
- Phones output: 350 mW/(150 - 600)Ohm

POWER SUPPLY STAGE

- Operating voltage/frequency: 100/240V, 50/60Hz
- Type: External power supply

FUNCTIONS

- Reverberation: Yes
- Tone controls input: 80 Hz, 2.5kHz, 12kHz (±15dB)
- Phantom power: Ch1-2 / 48V

INDICATORS

- Indicators: peak in, output -10dB, -6dB, -2dB, 0dB, +6dB


INPUT/OUTPUT CONNECTORS

- Input signal: XLR/Jack bal. pin RCA unbal
- Output signal: jack 6.35 mm
- Power connection: VDE

PHYSICAL

- Dimensions (WxHxD): 221x45x240mm / 8.7"x1.77"x9.45"
- Weight: 1.9kg / 4.19lbs

TECHICAL DRAWINGS

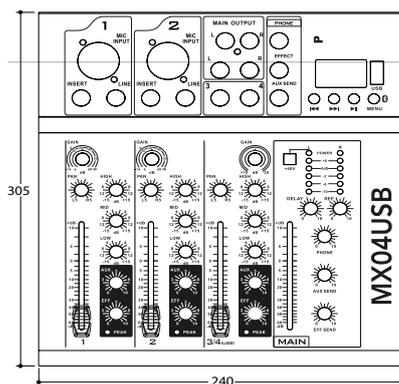

CERTIFICATIONS / APPROVALS

For more product info and downloads visit our website

