



Short gun condenser microphone

P714

User Manual



Congratulation for choosing a PROAUDIO® product, please read the instruction manual carefully before use.

Short gun condenser microphone P714

PROAUDIO® presents a line of microphones suitable for the different recording situations. Quality, reliability and above all, precision in the sound recording, are the main features that make this series an essential reference point for the sound recording professional.







-
- Short gun condenser microphone with super-cardioid polar pattern. Excellent precision and speech intelligibility. Particularly suitable for broadcast, TV and cinema applications. Its compact dimensions, sturdiness and light-weight, make this microphone particularly suitable for reportage.
-

Technical parameter :

Polar Pattern	Super-cardioid
Frequency Response	50Hz - 14kHz
Max SPL	130 dB
Power supply	1.5V - 10V DC
Output Impedance	1600Ω±30%(at 1KHz)
Sensitivity	-51dB±3dB(at 1KHz)

Technical parameter :

Polar Pattern	Super-cardioid
Frequency Response	50Hz - 16kHz
Max SPL	130 dB
Power supply	1.5V - 10V DC
Output Impedance	500Ω±30%(at 1KHz)
Sensitivity	70dB±3dB(at 1KHz)

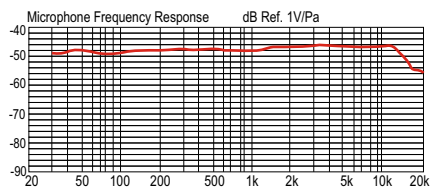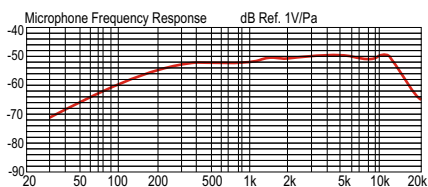

Short gun condenser microphone

P714

